

HAPC analog power supply controller (high power)

LS-HAPC series · Light controllers · 4 models



HAPC series high-power controllers provide brightness-control power for high-power 24 V LED lights, with a built-in high-power switching power supply, high-speed isolated trigger with trigger-on / trigger-off, and stepless knob adjustment on the front panel; stable, convenient, fast high-power controllers for industrial lighting.

Features

- Multi-turn stepless knob for precise light control
- Robust aviation connectors
- Built-in high-power switching power supply
- High-speed isolated trigger, supports trigger-on and trigger-off

Common specifications

Input voltage	AC100-240V 50/60Hz
Output voltage	0-24 V
Control	Multi-turn knob
Front panel (LS-HHAPC24400P-1T / LS-HHAPC24500P-1T)	Multi-turn knob, trigger port (EXT TRI), on/off switch, power switch, ground terminal, two aviation light outputs

Models

Model	Channel / output	Single channel current	Total output current	Trigger input	Channels
LS-HHAPC24400P-1T	C1 O2 (1 channel, 2 outputs)	10A	16.5A	Yes	1
LS-HHAPC24500P-1T	C1 O2 (1 channel, 2 outputs)	10A	21A	Yes	1
LS-HHAPC48550-1T	C1 O4 (1 channel, 4 outputs)	5A/7A	11.5A	No	1
LS-HHAPC48400-2T	C2 O4 (2 channels, 4 outputs)	4.2A	8.4A	No	2

More values per model (Control (perform)) are on each product page.


Dimensions

面板说明

LS-HHAPC24400P-1T LS-HHAPC24500P-1T


特别说明:

两个型号外观一致

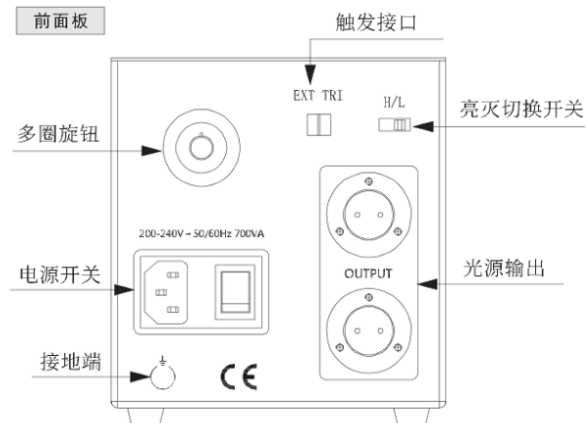

安装尺寸图


LS-HHAPC24400P-1T □ HHAPC24500P-1T
安装尺寸一致

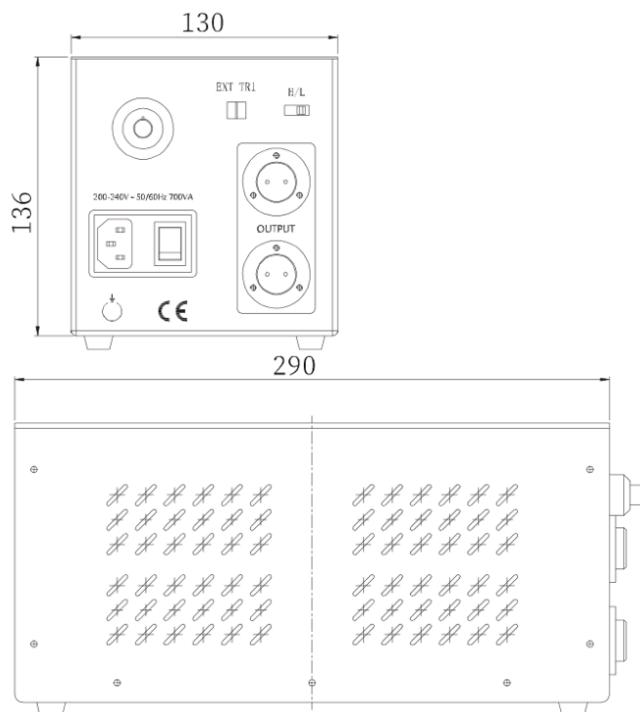


面板说明

安装尺寸图

LS-HHAPC48550-1T

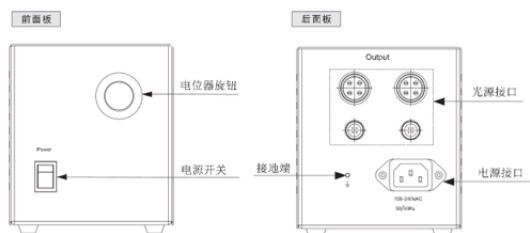


LS-HHAPC48550-1T

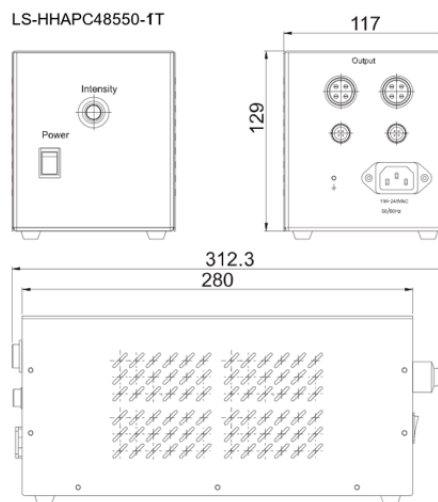

面板说明

安装尺寸图

LS-HHAPC48400-2T

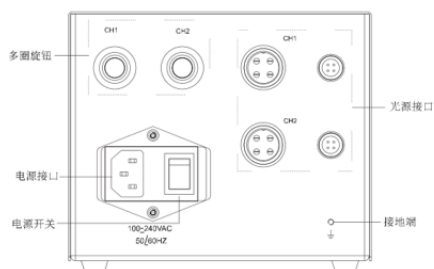

LS-HHAPC48400-2T

