


159.3 x 57.3 mm bar light

LS-BAR-0110 series · Bar lights · 14 models

3 x 57.3 mm bar light. Lit area 152.9 x 35.3 mm. Available in 774 configurations (color, connector type, connectorized at light, driver included); choose one below and request a quote. Rendered illustration: the actual product may differ in appearance.

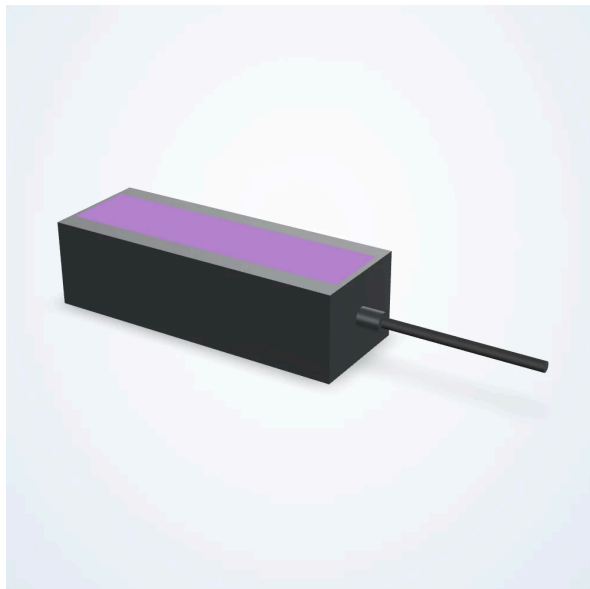

Common specifications

Active Width (mm)	35.3
Collimated	Not Collimated
Compliances	CE, IEC 62471, RoHS
Daisy Chain	No
Direct Connect	No
Height (mm)	45.2
Housing Material	Aluminum
Maximum Duty Cycle (%)	100
Maximum Operating Temperature (C)	60
Maximum Operating Temperature (F)	140
Minimum Operating Temperature (F)	32
Polarized	Not Polarized
Strobe Trigger Input	Constant On Only
Voltage	24 VDC
Width (mm)	57.3

Models

Model	Active Length (mm)	Length (mm)	Mounting Method	Product Weight (Kg)	Product Weight (Lbs)
LS-BAR-0110-L1	152.9	159.3	T-Slot Channels	0.25	0.56
LS-BAR-0110-L2	305.8	312.2	Tapped Holes	0.5	1.11

LS-BAR-0110-L3	458.7	465.1	Tapped Holes	0.75	1.66
LS-BAR-0110-L4	611.6	618	Tapped Holes	1	2.21
LS-BAR-0110-L5	764.5	770.9	Tapped Holes	1.25	2.76
LS-BAR-0110-L6	917.4	923.8	Tapped Holes	1.5	3.32
LS-BAR-0110-L7	1070.4	1076.7	Tapped Holes	1.75	3.87
LS-BAR-0110-L8	1223.3	1229.6	Tapped Holes	2	4.42
LS-BAR-0110-L9	1376.2	1382.5	Tapped Holes	2.25	4.97
LS-BAR-0110-L10	1529.1	1535.4	Tapped Holes	2.5	5.51
LS-BAR-0110-L11	1682	1688.3	Tapped Holes	2.76	6.07
LS-BAR-0110-L12	1834.9	1841.2	Tapped Holes	3	6.62
LS-BAR-0110-L13	1987.8	1994.2	Tapped Holes	3.25	7.17
LS-BAR-0110-L14	2140.7	2147.1	Tapped Holes	3.5	7.72

Product views

