


161.1 x 60 mm bar light

LS-BAR-0170 series · Bar lights · 1 model

161.1 x 60 mm bar light. Lit area 149.8 x 29.5 mm. Connection: 5 Pin M12 Male A-Coded. Available in 38 configurations (color, lens angle, polarized); choose one below and request a quote. Rendered illustration: the actual product may differ in appearance.

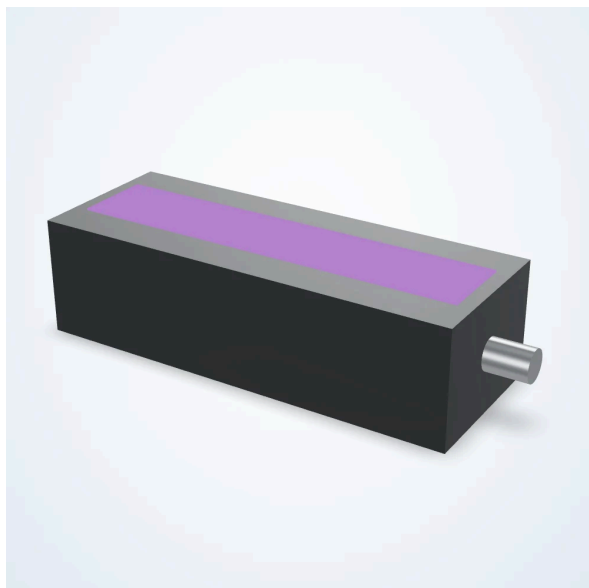

Options

Color	365nm Ultraviolet (UV), 395nm Ultraviolet (UV), 470nm Blue, 505nm Cyan, 530nm Green, 625nm Red, 850nm Infrared, 940nm Infrared, WHITE
Lens Angle	25 Degree, 14 Degree, 10 x 50 Degree, 30 Degree
Polarized	Not Polarized, Polarized

Order by the full LS number of the chosen configuration; we confirm it with your quote.

Common specifications

Active Length (mm)	149.8
Active Width (mm)	29.5
Collimated	Not Collimated
Compliances	CE, IEC 62471, RoHS
Connector Type	5 Pin M12 Male A-Coded
Connectorized At Light	Connectorized
Daisy Chain	No
Direct Connect	Yes
Driver Included	Included
Driver Location	Internal
Driver Nomenclature	SVL Smart Driver
Height (mm)	44.3
Housing Material	Aluminum
IP Rating	IP65

Intensity Adjustment Type	Analog Voltage, Integrated Potentiometer
Length (mm)	161.1
Maximum Constant On Current (mA)	500
Maximum Duty Cycle (%)	100
Maximum Input Power Constant On (W)	12
Maximum Operating Temperature (C)	40
Maximum Operating Temperature (F)	104
Maximum Storage Temperature (C)	70
Maximum Storage Temperature (F)	158
Maximum Strobe Current (mA)	500
Maximum Strobe Duration (ms)	No Limit
Maximum Strobe Duty Cycle (%)	100
Maximum Strobe Frequency (Hz)	4000
Maximum Strobe Input Power (W)	10
Maximum Strobe Latency (us)	10
Minimum Operating Temperature (C)	-18
Minimum Storage Temperature (C)	-20
Minimum Storage Temperature (F)	-4
Minimum Strobe Duration (us)	30
Mounting Method	T-Slot Channels
NPN Trigger Current (mA)	15
NPN Trigger Voltage (V)	< 1 VDC
Operation Modes	Constant On, Constant On – Dimmable, Strobe, Strobe – Dimmable
PNP Trigger Current (mA)	20
PNP Trigger Voltage (V)	4-24 VDC
Product Weight (Kg)	0.29
Product Weight (Lbs)	0.63
Strobe Trigger Input	NPN Trigger, PNP Trigger
Voltage	24 VDC
Width (mm)	60

Models

Model

LS-BAR-0170

Product views

