


303.2 x 65 mm bar light

LS-BAR-0177 series · Bar lights · 1 model

303.2 x 65 mm bar light. Lit area 300 x 56.9 mm. Connection: Flying Leads. Available in 4 configurations (color); choose one below and request a quote. Rendered illustration: the actual product may differ in appearance.

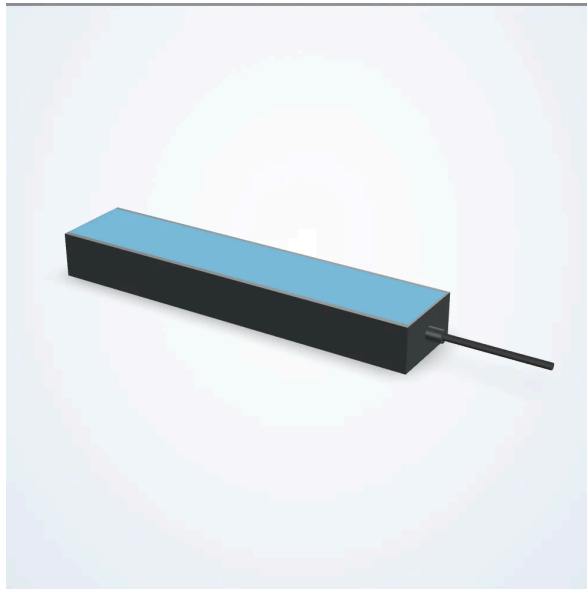

Options

Color 470nm Blue, 625nm Red, 850nm Infrared, WHITE

Order by the full LS number of the chosen configuration; we confirm it with your quote.

Common specifications

Active Length (mm)	300
Active Width (mm)	56.9
Collimated	Not Collimated
Compliances	CE, IEC 62471, RoHS
Connector Type	Flying Leads
Connectorized At Light	Connectorized
Daisy Chain	No
Direct Connect	No
Driver Included	Included
Driver Location	Internal
Driver Nomenclature	SVL OverDrive Driver
Height (mm)	36.1
Housing Material	Aluminum
IP Rating	IP65
Intensity Adjustment Type	Analog Voltage
Length (mm)	303.2
Lens Angle	Diffused
Maximum Current (Overcurrent Strobe) (mA)	2

Maximum Duty Cycle (%)	3.5
Maximum Input Power Overcurrent Strobe (W)	23
Maximum Operating Temperature (C)	40
Maximum Operating Temperature (F)	104
Maximum Overcurrent Strobe Duration (ms)	1
Maximum Overcurrent Strobe Duty Cycle (%)	3.5
Maximum Overcurrent Strobe Frequency (Hz)	4000
Maximum Overcurrent Strobe Latency (us)	6
Maximum Storage Temperature (C)	70
Maximum Storage Temperature (F)	158
Minimum Operating Temperature (C)	-18
Minimum Overcurrent Strobe Duration (us)	25
Minimum Storage Temperature (C)	-20
Minimum Storage Temperature (F)	-4
Mounting Method	T-Slot Channels
NPN Trigger Current (mA)	10
NPN Trigger Voltage (V)	< 1 VDC
Operation Modes	Overcurrent Strobe, Overcurrent Strobe - Dimmable
PNP Trigger Current (mA)	13.4
PNP Trigger Voltage (V)	4-24 VDC
Polarized	Not Polarized
Product Weight (Kg)	0.46
Product Weight (Lbs)	1
Strobe Trigger Input	NPN Trigger, PNP Trigger
Voltage	24 VDC
Width (mm)	65

Models

Model

LS-BAR-0177

Product views

