


1987.8 x 50.2 mm backlight

LS-BKL-0028 series · Backlights · 1 model

1987.8 x 50.2 mm backlight.
Lit area
1978.66 x 24.6 mm.
Connection:
Flying Leads.
Available in 10 configurations (color, driver included, driver location, driver nomenclature); choose one below and request a quote.
Rendered illustration: the actual product may differ in appearance.

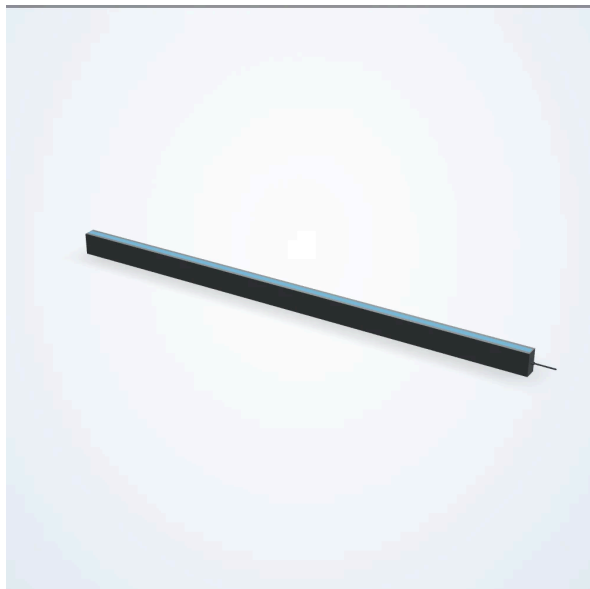

Options

Color	455nm Blue, 530nm Green, 625nm Red, 850nm Infrared, WHITE
Driver Included	No Driver Required, Included
Driver Location	No Driver, In Line
Driver Nomenclature	24V, iCS2 - IC
Maximum Constant On Current (mA)	9782, 13043
Maximum Input Power Constant On (W)	234.8, 313
Operation Modes	Constant On, Constant On, Constant On - Dimmable

Order by the full LS number of the chosen configuration; we confirm it with your quote.

Common specifications

Active Length (mm)	1978.66
Active Width (mm)	24.6
Cable Length (mm)	2000
Collimated	Not Collimated
Compliances	CE, IEC 62471, RoHS
Connector Type	Flying Leads
Connectorized At Light	Hardwired
Daisy Chain	No
Direct Connect	No
Height (mm)	90.7
Housing Material	Aluminum

IP Rating	IP50
Length (mm)	1987.8
Maximum Duty Cycle (%)	100
Maximum Operating Temperature (C)	60
Maximum Operating Temperature (F)	140
Minimum Operating Temperature (F)	32
Mounting Method	T-Slot Channel
Polarized	Not Polarized
Product Weight (Kg)	7.64
Product Weight (Lbs)	16.87
Strobe Trigger Input	Constant On Only
Voltage	24 VDC
Width (mm)	50.2
Intensity Adjustment Type	Analog Voltage

Models

Model
LS-BKL-0028

Product views



-
-
-
-

