


Backlight series, 30 mm high, Flying Leads

LS-BKL-S04 series · Backlights · 282 models

Lit area 37.1 x 25.4 mm; 24 VDC supply; connection: flying leads. Choose colour, driver included, driver location, intensity control, operating modes below (16 configurations) and request a quote. Rendered illustration: the actual product may differ in appearance.

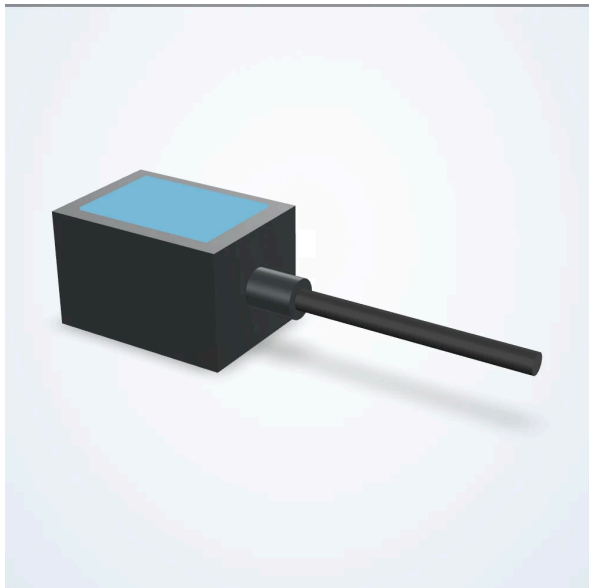

Common specifications

Lit width (mm)	25.4
Width (mm)	33.8
Height (mm)	30
Voltage	24 VDC
Connector	Flying Leads
Connection at light	Hardwired
Cable length (mm)	2000
Operating temperature	up to 60 °C
IP rating	IP50
Housing	Aluminum
Mounting	T-Slot Channel
Collimated	Not Collimated
Daisy chain	No
Diffused	Not Diffused
Direct connect	No
Maximum duty cycle (%)	100
Polarized	Not Polarized

Models

Model	Lit length (mm)	Length (mm)	Maximum constant on current (ma)	Maximum input power constant on (w)	Compliance	Colour	Driver included
LS-BKL-0049	37.1	47.2	37 / 55 (by configuration)	0.9 / 1.3 (by configuration)	CE, IEC 62471, RoHS	-	-

Model	Lit length (mm)	Length (mm)	Maximum constant on current (ma)	Maximum input power constant on (w)	Compliance	Colour	Driver included
LS-BKL-0050	62.5	72.6	57 / 85 (by configuration)	1.4 / 2.1 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0051	87.9	98	77 / 115 (by configuration)	1.9 / 2.8 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0052	113.3	123.4	97 / 145 (by configuration)	2.3 / 3.5 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0053	138.7	148.8	117 / 175 (by configuration)	2.8 / 4.2 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0054	164.1	174.2	137 / 205 (by configuration)	3.3 / 4.9 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0055	189.5	199.6	157 / 235 (by configuration)	3.8 / 5.7 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0056	214.9	225	177 / 265 (by configuration)	4.3 / 6.4 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0057	240.3	250.4	197 / 295 (by configuration)	4.7 / 7.1 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0058	265.7	275.8	217 / 325 (by configuration)	5.2 / 7.8 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0059	291.1	301.2	237 / 355 (by configuration)	5.7 / 8.5 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0060	316.5	326.6	257 / 385 (by configuration)	6.2 / 9.3 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0061	341.9	352	277 / 415 (by configuration)	6.7 / 10 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0062	367.3	377.4	297 / 445 (by configuration)	7.1 / 10.7 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0063	392.7	402.8	317 / 475 (by configuration)	7.6 / 11.4 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0064	418.1	428.2	337 / 505 (by configuration)	8.1 / 12.1 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0065	443.5	453.6	357 / 535 (by configuration)	8.6 / 12.9 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0066	468.9	479	377 / 565 (by configuration)	9.1 / 13.6 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0067	494.3	504.4	397 / 595 (by configuration)	9.5 / 14.3 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0068	519.7	529.8	417 / 625 (by configuration)	10 / 15 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0069	545.1	555.2	437 / 655 (by configuration)	10.5 / 15.7 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0070	570.5	580.6	457 / 685 (by configuration)	11 / 16.5 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0071	595.9	606	477 / 715 (by configuration)	11.5 / 17.2 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0072	621.3	631.4	497 / 745 (by configuration)	11.9 / 17.9 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0073	646.7	656.8	517 / 775 (by configuration)	12.4 / 18.6 (by configuration)	CE, IEC 62471, RoHS	-	-

Model	Lit length (mm)	Length (mm)	Maximum constant on current (ma)	Maximum input power constant on (w)	Compliance	Colour	Driver included
LS-BKL-0074	672.1	682.2	537 / 805 (by configuration)	12.9 / 19.3 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0075	697.5	707.6	557 / 835 (by configuration)	13.4 / 20.1 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0076	722.9	733	577 / 865 (by configuration)	13.9 / 20.8 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0077	748.3	758.4	597 / 895 (by configuration)	14.3 / 21.5 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0078	773.7	783.8	617 / 925 (by configuration)	14.8 / 22.2 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0079	799.1	809.2	637 / 955 (by configuration)	15.3 / 22.9 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0080	824.5	834.6	657 / 985 (by configuration)	15.8 / 23.7 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0081	849.9	860	677 / 1015 (by configuration)	16.3 / 24.4 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0082	875.3	885.4	697 / 1045 (by configuration)	16.7 / 25.1 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0083	900.7	910.8	717 / 1075 (by configuration)	17.2 / 25.8 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0084	926.1	936.2	737 / 1105 (by configuration)	17.7 / 26.5 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0085	951.5	961.6	757 / 1135 (by configuration)	18.2 / 27.3 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0086	976.9	987	777 / 1165 (by configuration)	18.7 / 28 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0087	1002	1012	-	19.1 / 28.7 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0088	1028	1038	-	19.6 / 29.4 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0089	1053	1063	-	20.1 / 30.1 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0090	1078	1089	-	20.6 / 30.9 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0091	1104	1114	-	21.1 / 31.6 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0092	1129	1139	-	21.5 / 32.3 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0093	1155	1165	-	22 / 33 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0094	1180	1190	-	22.5 / 33.7 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0095	1205	1216	-	23 / 34.5 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0096	1231	1241	-	23.5 / 35.2 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0097	1256	1266	-	23.9 / 35.9 (by configuration)	CE, IEC 62471, RoHS	-	-

Model	Lit length (mm)	Length (mm)	Maximum constant on current (ma)	Maximum input power constant on (w)	Compliance	Colour	Driver included
LS-BKL-0098	1282	1292	-	24.4 / 36.6 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0099	1307	1317	-	24.9 / 37.3 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0100	1332	1343	-	25.4 / 38.1 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0101	1358	1368	-	25.9 / 38.8 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0102	1383	1393	-	26.3 / 39.5 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0103	1409	1419	-	26.8 / 40.2 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0104	1434	1444	-	27.3 / 40.9 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0105	1459	1470	-	27.8 / 41.7 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0106	1485	1495	-	28.3 / 42.4 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0107	1510	1520	-	28.7 / 43.1 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0108	1536	1546	-	29.2 / 43.8 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0109	1561	1571	-	29.7 / 44.5 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0110	1586	1597	-	30.2 / 45.3 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0111	1612	1622	1277 / 1915 (by configuration)	30.7 / 46 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0112	1637	1647	1297 / 1945 (by configuration)	31.1 / 46.7 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0113	1663	1673	1317 / 1975 (by configuration)	31.6 / 47.4 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0114	1688	1698	1337 / 2005 (by configuration)	32.1 / 48.1 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0115	1713	1724	1357 / 2035 (by configuration)	32.6 / 48.9 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0116	1739	1749	1377 / 2065 (by configuration)	33.1 / 49.6 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0117	1764	1774	1397 / 2095 (by configuration)	33.5 / 50.3 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0118	1790	1800	1417 / 2125 (by configuration)	34 / 51 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0119	1815	1825	1437 / 2155 (by configuration)	34.5 / 51.7 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0120	1840	1851	1457 / 2185 (by configuration)	35 / 52.5 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0121	1866	1876	1477 / 2215 (by configuration)	35.5 / 53.2 (by configuration)	CE, IEC 62471, RoHS	-	-

Model	Lit length (mm)	Length (mm)	Maximum constant on current (ma)	Maximum input power constant on (w)	Compliance	Colour	Driver included
LS-BKL-0122	1891	1901	1497 / 2245 (by configuration)	35.9 / 53.9 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0123	1917	1927	1517 / 2275 (by configuration)	36.4 / 54.6 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0124	1942	1952	1537 / 2305 (by configuration)	36.9 / 55.3 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0125	1967	1978	1557 / 2335 (by configuration)	37.4 / 56.1 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0126	1993	2003	1577 / 2365 (by configuration)	37.9 / 56.8 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0127	2018	2028	1597 / 2395 (by configuration)	38.3 / 57.5 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0128	2044	2054	1617 / 2425 (by configuration)	38.8 / 58.2 (by configuration)	CE, IEC 62471, RoHS	-	-
LS-BKL-0145	37.1	47.2	37	0.9	CE	WHITE	No Driver Required
LS-BKL-0146	37.1	47.2	55	1.3	CE	WHITE	Included
LS-BKL-0147	37.1	47.2	55	1.3	CE	WHITE	Included
LS-BKL-0148	37.1	47.2	55	1.3	CE	WHITE	Included
LS-BKL-0149	62.5	72.6	57	1.4	CE	WHITE	No Driver Required
LS-BKL-0150	62.5	72.6	85	2.1	CE	WHITE	Included
LS-BKL-0151	62.5	72.6	85	2.1	CE	WHITE	Included
LS-BKL-0152	62.5	72.6	85	2.1	CE	WHITE	Included
LS-BKL-0153	87.9	98	77	1.9	CE	WHITE	No Driver Required
LS-BKL-0154	87.9	98	115	2.8	CE	WHITE	Included
LS-BKL-0155	87.9	98	115	2.8	CE	WHITE	Included
LS-BKL-0156	87.9	98	115	2.8	CE	WHITE	Included
LS-BKL-0157	113.3	123.4	97	2.3	CE	WHITE	No Driver Required
LS-BKL-0158	113.3	123.4	145	3.5	CE	WHITE	Included
LS-BKL-0159	113.3	123.4	145	3.5	CE	WHITE	Included
LS-BKL-0160	113.3	123.4	145	3.5	CE	WHITE	Included
LS-BKL-0161	138.7	148.8	117	2.8	CE	WHITE	No Driver Required

Model	Lit length (mm)	Length (mm)	Maximum constant on current (ma)	Maximum input power constant on (w)	Compliance	Colour	Driver included
LS-BKL-0162	138.7	148.8	175	4.2	CE	WHITE	Included
LS-BKL-0163	138.7	148.8	175	4.2	CE	WHITE	Included
LS-BKL-0164	138.7	148.8	175	4.2	CE	WHITE	Included
LS-BKL-0165	164.1	174.2	137	3.3	CE	WHITE	No Driver Required
LS-BKL-0166	164.1	174.2	205	4.9	CE	WHITE	Included
LS-BKL-0167	164.1	174.2	205	4.9	CE	WHITE	Included
LS-BKL-0168	164.1	174.2	205	4.9	CE	WHITE	Included
LS-BKL-0169	189.5	199.6	157	3.8	CE	WHITE	No Driver Required
LS-BKL-0170	189.5	199.6	235	5.7	CE	WHITE	Included
LS-BKL-0171	189.5	199.6	235	5.7	CE	WHITE	Included
LS-BKL-0172	189.5	199.6	235	5.7	CE	WHITE	Included
LS-BKL-0173	214.9	225	177	4.3	CE	WHITE	No Driver Required
LS-BKL-0174	214.9	225	265	6.4	CE	WHITE	Included
LS-BKL-0175	214.9	225	265	6.4	CE	WHITE	Included
LS-BKL-0176	214.9	225	265	6.4	CE	WHITE	Included
LS-BKL-0177	240.3	250.4	197	4.7	CE	WHITE	No Driver Required
LS-BKL-0178	240.3	250.4	295	7.1	CE	WHITE	Included
LS-BKL-0179	240.3	250.4	295	7.1	CE	WHITE	Included
LS-BKL-0180	240.3	250.4	295	7.1	CE	WHITE	Included
LS-BKL-0181	265.7	275.8	217	5.2	CE	WHITE	No Driver Required
LS-BKL-0182	265.7	275.8	325	7.8	CE	WHITE	Included
LS-BKL-0183	265.7	275.8	325	7.8	CE	WHITE	Included
LS-BKL-0184	265.7	275.8	325	7.8	CE	WHITE	Included
LS-BKL-0185	291.1	301.2	237	5.7	CE	WHITE	No Driver Required

Model	Lit length (mm)	Length (mm)	Maximum constant on current (ma)	Maximum input power constant on (w)	Compliance	Colour	Driver included
LS-BKL-0186	291.1	301.2	355	8.5	CE	WHITE	Included
LS-BKL-0187	291.1	301.2	355	8.5	CE	WHITE	Included
LS-BKL-0188	291.1	301.2	355	8.5	CE	WHITE	Included
LS-BKL-0189	316.5	326.6	257	6.2	CE	WHITE	No Driver Required
LS-BKL-0190	316.5	326.6	385	9.3	CE	WHITE	Included
LS-BKL-0191	316.5	326.6	385	9.3	CE	WHITE	Included
LS-BKL-0192	316.5	326.6	385	9.3	CE	WHITE	Included
LS-BKL-0193	341.9	352	277	6.7	CE	WHITE	No Driver Required
LS-BKL-0194	341.9	352	415	10	CE	WHITE	Included
LS-BKL-0195	341.9	352	415	10	CE	WHITE	Included
LS-BKL-0196	341.9	352	415	10	CE	WHITE	Included
LS-BKL-0197	367.3	377.4	297	7.1	CE	WHITE	No Driver Required
LS-BKL-0198	367.3	377.4	445	10.7	CE	WHITE	Included
LS-BKL-0199	367.3	377.4	445	10.7	CE	WHITE	Included
LS-BKL-0200	367.3	377.4	445	10.7	CE	WHITE	Included
LS-BKL-0201	392.7	402.8	317	7.6	CE	WHITE	No Driver Required
LS-BKL-0202	392.7	402.8	475	11.4	CE	WHITE	Included
LS-BKL-0203	392.7	402.8	475	11.4	CE	WHITE	Included
LS-BKL-0204	392.7	402.8	475	11.4	CE	WHITE	Included
LS-BKL-0205	418.1	428.2	337	8.1	CE	WHITE	No Driver Required
LS-BKL-0206	418.1	428.2	505	12.1	CE	WHITE	Included
LS-BKL-0207	418.1	428.2	505	12.1	CE	WHITE	Included
LS-BKL-0208	418.1	428.2	505	12.1	CE	WHITE	Included
LS-BKL-0209	443.5	453.6	357	8.6	CE	WHITE	No Driver Required

Model	Lit length (mm)	Length (mm)	Maximum constant on current (ma)	Maximum input power constant on (w)	Compliance	Colour	Driver included
LS-BKL-0210	443.5	453.6	535	12.9	CE	WHITE	Included
LS-BKL-0211	443.5	453.6	535	12.9	CE	WHITE	Included
LS-BKL-0212	443.5	453.6	535	12.9	CE	WHITE	Included
LS-BKL-0213	468.9	479	377	9.1	CE	WHITE	No Driver Required
LS-BKL-0214	468.9	479	565	13.6	CE	WHITE	Included
LS-BKL-0215	468.9	479	565	13.6	CE	WHITE	Included
LS-BKL-0216	468.9	479	565	13.6	CE	WHITE	Included
LS-BKL-0217	494.3	504.4	397	9.5	CE	WHITE	No Driver Required
LS-BKL-0218	494.3	504.4	595	14.3	CE	WHITE	Included
LS-BKL-0219	494.3	504.4	595	14.3	CE	WHITE	Included
LS-BKL-0220	494.3	504.4	595	14.3	CE	WHITE	Included
LS-BKL-0221	519.7	529.8	417	10	CE	WHITE	No Driver Required
LS-BKL-0222	519.7	529.8	625	15	CE	WHITE	Included
LS-BKL-0223	519.7	529.8	625	15	CE	WHITE	Included
LS-BKL-0224	519.7	529.8	625	15	CE	WHITE	Included
LS-BKL-0225	545.1	555.2	437	10.5	CE	WHITE	No Driver Required
LS-BKL-0226	545.1	555.2	655	15.7	CE	WHITE	Included
LS-BKL-0227	545.1	555.2	655	15.7	CE	WHITE	Included
LS-BKL-0228	545.1	555.2	655	15.7	CE	WHITE	Included
LS-BKL-0229	570.5	580.6	457	11	CE	WHITE	No Driver Required
LS-BKL-0230	570.5	580.6	685	16.5	CE	WHITE	Included
LS-BKL-0231	570.5	580.6	685	16.5	CE	WHITE	Included
LS-BKL-0232	570.5	580.6	685	16.5	CE	WHITE	Included
LS-BKL-0233	595.9	606	477	11.5	CE	WHITE	No Driver Required

Model	Lit length (mm)	Length (mm)	Maximum constant on current (ma)	Maximum input power constant on (w)	Compliance	Colour	Driver included
LS-BKL-0234	595.9	606	715	17.2	CE	WHITE	Included
LS-BKL-0235	595.9	606	715	17.2	CE	WHITE	Included
LS-BKL-0236	595.9	606	715	17.2	CE	WHITE	Included
LS-BKL-0237	621.3	631.4	497	11.9	CE	WHITE	No Driver Required
LS-BKL-0238	621.3	631.4	745	17.9	CE	WHITE	Included
LS-BKL-0239	621.3	631.4	745	17.9	CE	WHITE	Included
LS-BKL-0240	621.3	631.4	745	17.9	CE	WHITE	Included
LS-BKL-0241	646.7	656.8	517	12.4	CE	WHITE	No Driver Required
LS-BKL-0242	646.7	656.8	775	18.6	CE	WHITE	Included
LS-BKL-0243	646.7	656.8	775	18.6	CE	WHITE	Included
LS-BKL-0244	646.7	656.8	775	18.6	CE	WHITE	Included
LS-BKL-0245	672.1	682.2	537	12.9	CE	WHITE	No Driver Required
LS-BKL-0246	672.1	682.2	805	19.3	CE	WHITE	Included
LS-BKL-0247	672.1	682.2	805	19.3	CE	WHITE	Included
LS-BKL-0248	672.1	682.2	805	19.3	CE	WHITE	Included
LS-BKL-0249	697.5	707.6	557	13.4	CE	WHITE	No Driver Required
LS-BKL-0250	697.5	707.6	835	20.1	CE	WHITE	Included
LS-BKL-0251	697.5	707.6	835	20.1	CE	WHITE	Included
LS-BKL-0252	697.5	707.6	835	20.1	CE	WHITE	Included
LS-BKL-0253	722.9	733	577	13.9	CE	WHITE	No Driver Required
LS-BKL-0254	722.9	733	865	20.8	CE	WHITE	Included
LS-BKL-0255	722.9	733	865	20.8	CE	WHITE	Included
LS-BKL-0256	722.9	733	865	20.8	CE	WHITE	Included
LS-BKL-0257	748.3	758.4	597	14.3	CE	WHITE	No Driver Required

Model	Lit length (mm)	Length (mm)	Maximum constant on current (ma)	Maximum input power constant on (w)	Compliance	Colour	Driver included
LS-BKL-0258	748.3	758.4	895	21.5	CE	WHITE	Included
LS-BKL-0259	748.3	758.4	895	21.5	CE	WHITE	Included
LS-BKL-0260	748.3	758.4	895	21.5	CE	WHITE	Included
LS-BKL-0261	773.7	783.8	617	14.8	CE	WHITE	No Driver Required
LS-BKL-0262	773.7	783.8	925	22.2	CE	WHITE	Included
LS-BKL-0263	773.7	783.8	925	22.2	CE	WHITE	Included
LS-BKL-0264	773.7	783.8	925	22.2	CE	WHITE	Included
LS-BKL-0265	799.1	809.2	637	15.3	CE	WHITE	No Driver Required
LS-BKL-0266	799.1	809.2	955	22.9	CE	WHITE	Included
LS-BKL-0267	799.1	809.2	955	22.9	CE	WHITE	Included
LS-BKL-0268	799.1	809.2	955	22.9	CE	WHITE	Included
LS-BKL-0269	824.5	834.6	657	15.8	CE	WHITE	No Driver Required
LS-BKL-0270	824.5	834.6	985	23.7	CE	WHITE	Included
LS-BKL-0271	824.5	834.6	985	23.7	CE	WHITE	Included
LS-BKL-0272	824.5	834.6	985	23.7	CE	WHITE	Included
LS-BKL-0273	849.9	860	677	16.3	CE	WHITE	No Driver Required
LS-BKL-0274	849.9	860	1015	24.4	CE	WHITE	Included
LS-BKL-0275	849.9	860	1015	24.4	CE	WHITE	Included
LS-BKL-0276	849.9	860	1015	24.4	CE	WHITE	Included
LS-BKL-0277	875.3	885.4	697	16.7	CE	WHITE	No Driver Required
LS-BKL-0278	875.3	885.4	1045	25.1	CE	WHITE	Included
LS-BKL-0279	875.3	885.4	1045	25.1	CE	WHITE	Included
LS-BKL-0280	875.3	885.4	1045	25.1	CE	WHITE	Included
LS-BKL-0281	900.7	910.8	717	17.2	CE	WHITE	No Driver Required

Model	Lit length (mm)	Length (mm)	Maximum constant on current (ma)	Maximum input power constant on (w)	Compliance	Colour	Driver included
LS-BKL-0282	900.7	910.8	1075	25.8	CE	WHITE	Included
LS-BKL-0283	900.7	910.8	1075	25.8	CE	WHITE	Included
LS-BKL-0284	900.7	910.8	1075	25.8	CE	WHITE	Included
LS-BKL-0285	926.1	936.2	737	17.7	CE	WHITE	No Driver Required
LS-BKL-0286	926.1	936.2	1105	26.5	CE	WHITE	Included
LS-BKL-0287	926.1	936.2	1105	26.5	CE	WHITE	Included
LS-BKL-0288	926.1	936.2	1105	26.5	CE	WHITE	Included
LS-BKL-0289	951.5	961.6	757	18.2	CE	WHITE	No Driver Required
LS-BKL-0290	951.5	961.6	1135	27.3	CE	WHITE	Included
LS-BKL-0291	951.5	961.6	1135	27.3	CE	WHITE	Included
LS-BKL-0292	951.5	961.6	1135	27.3	CE	WHITE	Included
LS-BKL-0293	976.9	987	777	18.7	CE	WHITE	No Driver Required
LS-BKL-0294	976.9	987	1165	28	CE	WHITE	Included
LS-BKL-0295	976.9	987	1165	28	CE	WHITE	Included
LS-BKL-0296	976.9	987	1165	28	CE	WHITE	Included
LS-BKL-0297	1002	1012	797	19.1	CE	WHITE	No Driver Required
LS-BKL-0298	1028	1038	817	19.6	CE	WHITE	No Driver Required
LS-BKL-0299	1053	1063	837	20.1	CE	WHITE	No Driver Required
LS-BKL-0300	1078	1089	857	20.6	CE	WHITE	No Driver Required
LS-BKL-0301	1104	1114	877	21.1	CE	WHITE	No Driver Required
LS-BKL-0302	1129	1139	897	21.5	CE	WHITE	No Driver Required
LS-BKL-0303	1155	1165	917	22	CE	WHITE	No Driver Required
LS-BKL-0304	1180	1190	937	22.5	CE	WHITE	No Driver Required
LS-BKL-0305	1205	1216	957	23	CE	WHITE	No Driver Required

Model	Lit length (mm)	Length (mm)	Maximum constant on current (ma)	Maximum input power constant on (w)	Compliance	Colour	Driver included
LS-BKL-0306	1231	1241	977	23.5	CE	WHITE	No Driver Required
LS-BKL-0307	1256	1266	997	23.9	CE	WHITE	No Driver Required
LS-BKL-0308	1282	1292	1017	24.4	CE	WHITE	No Driver Required
LS-BKL-0309	1307	1317	1037	24.9	CE	WHITE	No Driver Required
LS-BKL-0310	1332	1343	1057	25.4	CE	WHITE	No Driver Required
LS-BKL-0311	1358	1368	1077	25.9	CE	WHITE	No Driver Required
LS-BKL-0312	1383	1393	1097	26.3	CE	WHITE	No Driver Required
LS-BKL-0313	1409	1419	1117	26.8	CE	WHITE	No Driver Required
LS-BKL-0314	1434	1444	1137	27.3	CE	WHITE	No Driver Required
LS-BKL-0315	1459	1470	1157	27.8	CE	WHITE	No Driver Required
LS-BKL-0316	1485	1495	1177	28.3	CE	WHITE	No Driver Required
LS-BKL-0317	1510	1520	1197	28.7	CE	WHITE	No Driver Required
LS-BKL-0318	1536	1546	1217	29.2	CE	WHITE	No Driver Required
LS-BKL-0319	1561	1571	1237	29.7	CE	WHITE	No Driver Required
LS-BKL-0320	1586	1597	1257	30.2	CE	WHITE	No Driver Required
LS-BKL-0321	1612	1622	1277	30.7	CE	WHITE	No Driver Required
LS-BKL-0322	1612	1622	1915	46	CE	WHITE	Included
LS-BKL-0323	1637	1647	1297	31.1	CE	WHITE	No Driver Required
LS-BKL-0324	1637	1647	1945	46.7	CE	WHITE	Included
LS-BKL-0325	1663	1673	1317	31.6	CE	WHITE	No Driver Required
LS-BKL-0326	1663	1673	1975	47.4	CE	WHITE	Included
LS-BKL-0327	1688	1698	1337	32.1	CE	WHITE	No Driver Required
LS-BKL-0328	1688	1698	2005	48.1	CE	WHITE	Included
LS-BKL-0329	1713	1724	1357	32.6	CE	WHITE	No Driver Required

Model	Lit length (mm)	Length (mm)	Maximum constant on current (ma)	Maximum input power constant on (w)	Compliance	Colour	Driver included
LS-BKL-0330	1713	1724	2035	48.9	CE	WHITE	Included
LS-BKL-0331	1739	1749	1377	33.1	CE	WHITE	No Driver Required
LS-BKL-0332	1739	1749	2065	49.6	CE	WHITE	Included
LS-BKL-0333	1764	1774	1397	33.5	CE	WHITE	No Driver Required
LS-BKL-0334	1764	1774	2095	50.3	CE	WHITE	Included
LS-BKL-0335	1790	1800	1417	34	CE	WHITE	No Driver Required
LS-BKL-0336	1790	1800	2125	51	CE	WHITE	Included
LS-BKL-0337	1815	1825	1437	34.5	CE	WHITE	No Driver Required
LS-BKL-0338	1840	1851	1457	35	CE	WHITE	No Driver Required
LS-BKL-0339	1866	1876	1477	35.5	CE	WHITE	No Driver Required
LS-BKL-0340	1891	1901	1497	35.9	CE	WHITE	No Driver Required
LS-BKL-0341	1917	1927	1517	36.4	CE	WHITE	No Driver Required
LS-BKL-0342	1942	1952	1537	36.9	CE	WHITE	No Driver Required
LS-BKL-0343	1967	1978	1557	37.4	CE	WHITE	No Driver Required
LS-BKL-0344	1993	2003	1577	37.9	CE	WHITE	No Driver Required
LS-BKL-0345	2018	2028	1597	38.3	CE	WHITE	No Driver Required
LS-BKL-0346	2044	2054	1617	38.8	CE	WHITE	No Driver Required

More values per model (Maximum current (overcurrent strobe) (ma), Maximum input power overcurrent strobe (w), Maximum overcurrent strobe frequency (hz), Maximum overcurrent strobe latency (us), Minimum overcurrent strobe duration (us), NPN trigger voltage (v), PNP trigger current (ma), PNP trigger voltage (v), Driver location, Operating modes, Strobe trigger input, Wavelength...) are on each product page.

Product views

