

Camera data cables

LS-CAMERA-DATA-CABLES series · Cables · 114 models

5 m. The USB3.0 Standard Data Cable can be used for data transmission and power supply of USB3.0 interface cameras, and is available in a variety of lengths.



Features

- The USB3.0 Standard Data Cable can be used for data transmission and power supply of USB3.0 interface cameras, and is available in a variety of lengths.

Models

Model	End A connector	End B connector	Cable diameter	Length	Cable color	Working temperature	Packaging
LS-ACU3-MBMS-AM-ST-0.5M	Micro-B male (with screw)	A male	6.8 mm	0.5 m	Black	-20°C~ 80°C	Individual package
LS-ACU3-MBMS-DOWN-AM-ST-0.5M	Micro-B male (with screw), Angle (down)	A male	6.8 mm	0.5 m	Black	-20°C~ 80°C	Individual package
LS-ACU3-MBMS-AM-ST-1M	Micro-B male (with screw)	A male	6.8 mm	1 m	Black	-20°C~ 80°C	Individual package
LS-ACU3-MBMS-DOWN-AM-ST-1M	Micro-B male (with screw), Angle (down)	A male	6.8 mm	1m	Black	-20°C~ 80°C	Individual package
LS-ACU3-MBMS-AM-ST-2M	Micro-B male (with screw)	A male	6.8 mm	2 m	Black	-20°C~ 80°C	Individual package
LS-ACU3-MBMS-DOWN-AM-ST-2M	Micro-B male (with screw), Angle (down)	A male	6.8 mm	2m	Black	-20°C~ 80°C	Individual package
LS-ACU3-MBMS-AM-ST-3M	Micro-B male (with screw)	A male	6.8 mm	3 m	Black	-20°C~ 80°C	Individual package
LS-ACU3-MBMS-DOWN-AM-ST-3M	Micro-B male (with screw), Angle (down)	A male	6.8 mm	3 m	Black	-20°C~ 80°C	Individual package

LS-ACU3-MBMS-AM-FL-3M	Micro-B male (with screw)	A male	6.8 mm	3 m	Black	-20 °C to 80 °C (-4 °F to 176 °F)	Individual package
LS-ACU3-MBMS-AM-SF-3M	Micro-B male (with screw)	A male	4.8 mm	3 m	Black	-20°C~ 80°C	Individual package
LS-ACU3-MBMS-AM-SF-5M	Micro-B male (with screw)	A male	4.8 mm	5 m	Black	-20°C~ 80°C	Individual package
LS-ACU3-CMS-AM-SF-3M	Type-C male, screw locking	A male	4.8 mm	3 m	Black	-10 °C to 50 °C (14 °F to 122 °F)	Individual package
LS-ACU3-CMS-AM-SF-5M	Type-C male, screw locking	A male	4.8 mm	5 m	Black	-10 °C to 50 °C (14 °F to 122 °F)	Individual package
LS-ACG-RJ45S-RJ45-ST-1M	RJ45 (with locking stud)	RJ45	6.2 mm	1 m	Black	-20°C~ 75°C	Individual package
LS-ACG-RJ45S-RJ45-ST-3M	RJ45 (with locking stud)	RJ45	6.2 mm	3 m	Black	-20°C~ 75°C	Individual package
LS-ACG-RJ45S-RJ45-ST-5M	RJ45 (with locking stud)	RJ45	6.2 mm	5 m	Black	-20°C~ 75°C	Individual package
LS-ACG-RJ45S-RJ45-ST-7M	RJ45 (with locking stud)	RJ45	6.2 mm	7 m	Black	-20°C~ 75°C	Individual package
LS-ACG-RJ45S-RJ45-HF-3M	RJ45 (with locking stud)	RJ45	6.5 mm	3 m	Black	-20°C~ 75°C	Individual package
LS-ACG-RJ45S-RJ45-HF-5M	RJ45 (with locking stud)	RJ45	6.5 mm	5 m	Black	-20°C~ 75°C	Individual package
LS-ACG-RJ45S-RJ45-HF-7M	RJ45 (with locking stud)	RJ45	6.5 mm	7 m	Black	-20°C~ 75°C	Individual package
LS-ACG-RJ45S-RJ45-SF-3M	RJ45 (with locking stud)	RJ45	6.5 mm	3 m	Black	-20°C~ 75°C	Individual package
LS-ACG-RJ45S-RJ45-SF-5M	RJ45 (with locking stud)	RJ45	6.5 mm	5 m	Black	-20°C~ 75°C	Individual package
LS-ACG-RJ45S-RJ45-SF-7M	RJ45 (with locking stud)	RJ45	6.5 mm	7 m	Black	-20°C~ 75°C	Individual package
LS-ACG-RJ45S-UP-RJ45-ST-3M	RJ45 (with locking stud), Bend(up)	RJ45	6.2 mm	3 m	Black	-20°C~ 75°C	Individual package
LS-ACG-RJ45S-UP-RJ45-ST-5M	RJ45 (with locking stud), Bend(up)	RJ45	6.2 mm	5 m	Black	-20°C~ 75°C	Individual package
LS-ACG-RJ45S-UP-RJ45-HF-3M	RJ45 (with locking stud), Bend (up)	RJ45	6.5 mm	3 m	Black	-20°C~ 75°C	Individual package
LS-ACG-RJ45S-UP-RJ45-HF-5M	RJ45 (with locking stud), Bend (up)	RJ45	6.5 mm	5 m	Black	-20°C~ 75°C	Individual package
LS-AC10G-RJ45S-RJ45-ST-3M	RJ45 (with locking stud)	RJ45	7.0 mm	3 m	Black	-20°C~ 75°C	Individual package
LS-AC10G-RJ45S-RJ45-HF-3M	RJ45 (with locking stud)	RJ45	7.0 mm	3 m	Black	-20 °C to 75 °C (-4 °F to 167 °F)	Individual package
LS-AC10G-2LC-2LC-ST-3M	LC (2-core)	LC (2-core)	6.5 mm	3 m	Black	-20 °C to 75 °C (-4 °F to 167 °F)	Individual package
LS-AC10G-SFP-850-LC	-	-	-	-	-	-20 °C to 75 °C (-4 °F to 167 °F)	Individual package
LS-ACC-MFM-MFM-ST-1M	Mini-FAKRA, Z-code	Mini-FAKRA, Z-code	2.8 ± 0.2 mm	1 m	Black	-20 °C to 80 °C (-4 °F to 176 °F)	Individual package

LS-ACC-MFM-MFM-ST-3M	Mini-FAKRA, Z-code	Mini-FAKRA, Z-code	2.8 ± 0.2 mm	3 m	Black	-20 °C to 80 °C (-4 °F to 176 °F)	Individual package
LS-ACU3-MBMS-AM-SF-7M	Micro-B male (with screw)	A male	4.8 mm	7 m	Black	-20°C~ 80°C	Individual package
LS-ACU3-CMS-AM-SF-7M	Type-C male, screw locking	A male	4.8 mm	7 m	Black	-10 °C to 50 °C (14 °F to 122 °F)	Individual package
LS-ACG-RJ45S-RJ45-ST-10M	RJ45 (with locking stud)	RJ45	6.2 mm	10 m	Black	-20°C~ 75°C	Individual package
LS-ACG-RJ45S-RJ45-HF-10M	RJ45 (with locking stud)	RJ45	6.5 mm	10 m	Black	-20°C~ 75°C	Individual package
LS-ACG-RJ45S-RJ45-SF-10M	RJ45 (with locking stud)	RJ45	6.5 mm	10 m	Black	-20°C~ 75°C	Individual package
LS-AC10G-RJ45S-RJ45-ST-5M	RJ45 (with locking stud)	RJ45	7.0 mm	5 m	Black	-20°C~ 75°C	Individual package
LS-AC10G-RJ45S-RJ45-HF-5M	RJ45 (with locking stud)	RJ45	7.0 mm	5 m	Black	-20 °C to 75 °C (-4 °F to 167 °F)	Individual package
LS-AC10G-2LC-2LC-ST-5M	LC (2-core)	LC (2-core)	6.5 mm	5 m	Black	-20 °C to 75 °C (-4 °F to 167 °F)	Individual package
LS-ACC-MFM-MFM-ST-5M	Mini-FAKRA, Z-code	Mini-FAKRA, Z-code	2.8 ± 0.2 mm	5 m	Black	-20 °C to 80 °C (-4 °F to 176 °F)	Individual package
LS-ACU3-MBMS-AM-SF-10M	Micro-B male (with screw)	A male	4.8 mm	10 m	Black	-20°C~ 80°C	Individual package
LS-ACU3-CMS-AM-SF-10M	Type-C male, screw locking	A male	4.8 mm	10 m	Black	-10 °C to 50 °C (14 °F to 122 °F)	Individual package
LS-ACC-MFM-MFM-ST-7M	Mini-FAKRA, Z-code	Mini-FAKRA, Z-code	3.3 ± 0.2 mm	7 m	Black	-20 °C to 80 °C (-4 °F to 176 °F)	Individual package
LS-ACG-RJ45S-RJ45-ST-15M	RJ45 (with locking stud)	RJ45	6.2 mm	15 m	Black	-20°C~ 75°C	Individual package
LS-ACG-RJ45S-RJ45-HF-15M	RJ45 (with locking stud)	RJ45	6.5 mm	15 m	Black	-20°C~ 75°C	Individual package
LS-ACG-RJ45S-RJ45-SF-15M	RJ45 (with locking stud)	RJ45	6.5 mm	15 m	Black	-20°C~ 75°C	Individual package
LS-ACG-RJ45S-UP-RJ45-ST-15M	RJ45 (with locking stud), Bend(up)	RJ45	6.2 mm	15 m	Black	-20°C~ 75°C	Individual package
LS-ACG-RJ45S-UP-RJ45-HF-15M	RJ45 (with locking stud), Bend (up)	RJ45	6.5 mm	15 m	Black	-20°C~ 75°C	Individual package
LS-ACC-MFM-MFM-ST-10M	Mini-FAKRA, Z-code	Mini-FAKRA, Z-code	3.3 ± 0.2 mm	10 m	Black	-20 °C to 80 °C (-4 °F to 176 °F)	Individual package
LS-ACU3-MBMS-AM-SF-15M	Micro-B male (with screw)	A male	4.8 mm	15 m	Black	-20°C~ 80°C	Individual package
LS-ACU3-CMS-AM-SF-15M	Type-C male, screw locking	A male	4.8 mm	15 m	Black	-10 °C to 50 °C (14 °F to 122 °F)	Individual package
LS-AC10G-RJ45S-RJ45-ST-10M	RJ45 (with locking stud)	RJ45	7.0 mm	10 m	Black	-20°C~ 75°C	Individual package
LS-AC10G-RJ45S-RJ45-HF-10M	RJ45 (with locking stud)	RJ45	7.0 mm	10 m	Black	-20 °C to 75 °C (-4 °F to 167 °F)	Individual package
LS-AC10G-2LC-2LC-ST-10M	LC (2-core)	LC (2-core)	6.5 mm	10 m	Black	-20 °C to 75 °C (-4 °F to 167 °F)	Individual package
LS-ACC-MFM-MFM-ST-15M	Mini-FAKRA, Z-code	Mini-FAKRA, Z-code	3.3 ± 0.2 mm	15 m	Black	-20 °C to 80 °C (-4 °F to 176 °F)	Individual package


LS-ACU3-MBMS-AM-SF-20M	Micro-B male (with screw)	A male	4.8 mm	20 m	Black	-20°C~ 80°C	Individual package
LS-ACU3-CMS-AM-SF-20M	Type-C male, screw locking	A male	4.8 mm	20 m	Black	-10 °C to 50 °C (14 °F to 122 °F)	Individual package
LS-ACG-RJ45S-RJ45-ST-30M	RJ45 (with locking stud)	RJ45	6.2 mm	30 m	Black	-20°C~ 75°C	Individual package
LS-ACG-RJ45S-RJ45-HF-30M	RJ45 (with locking stud)	RJ45	6.5 mm	30 m	Black	-20°C~ 75°C	Individual package
LS-ACXP6-DIN-UP-DIN-HF-1.5M	DIN 1.0/2.3	DIN 1.0/2.3 (angled)	5.0 mm	1.5 m	Black	-30 °C to 80 °C (-22 °F to 176 °F)	Individual package
LS-ACCL-MDR-MDR-HF-3M	MDR26	MDR26	9.5 mm	3 m	Black	-20°C~80°C	Individual package
LS-ACXP6-DIN-DIN-ST-3M	DIN 1.0/2.3	DIN 1.0/2.3	4 mm	3 m	Black	-30°C~75°C	Individual package
LS-ACXP6-DIN-BNC-ST-3M	DIN 1.0/2.3	BNC	4 mm	3 m	Black	-30°C~75°C	Individual package
LS-ACXP6-DIN-DIN-HF-3M	DIN 1.0/2.3	DIN 1.0/2.3	5.0 mm	3 m	Black	-30°C~80°C	Individual package
LS-ACXP6-DIN-BNC-HF-3M	DIN 1.0/2.3	BNC	5 mm	3 m	Black	-30°C~80°C	Individual package
LS-ACXP6-DIN-HDBNC-HF-3M	DIN 1.0/2.3	HD-BNC	5 mm	3 m	Black	-30°C~80°C	Individual package
LS-ACXP6-DIN-UP-DIN-HF-3M	DIN 1.0/2.3	DIN 1.0/2.3 (angled)	5.0 mm	3 m	Black	-30 °C to 80 °C (-22 °F to 176 °F)	Individual package
LS-ACXP12-HDBNC-HDBNC-ST-3M	HD-BNC	HD-BNC	7 mm	3 m	Black	-20°C~ 80°C	Individual package
LS-ACXP12-HDBNC-HDBNC-HF-3M	HD-BNC	HD-BNC	5 mm	3 m	Black	-30 °C to 80 °C (-22 °F to 176 °F)	Individual package
LS-ACXP12-HDBNC-UP-HDBNC-HF-3M	HD-BNC	HD-BNC (angled)	5 mm	3 m	Black	-20 °C to 80 °C (-4 °F to 176 °F)	Individual package
LS-ACCL-SDR-SDR-ST-3M	SDR	SDR	9.5 mm	3 m	Black	-20°C~80°C	Individual package
LS-ACCL-SDR-SDR-HF-3M	SDR26	SDR26	9.5 mm	3 m	Black	-20 °C to 80 °C (-4 °F to 176 °F)	Individual package
LS-ACCL-SDR-MDR-HF-3M	SDR26	MDR26	9.5 mm	3 m	Black	-20°C~80°C	Individual package
LS-ACXP12-HDBNC-UP-HDBNC-HF-4M	HD-BNC	HD-BNC (angled)	5 mm	4 m	Black	-20 °C to 80 °C (-4 °F to 176 °F)	Individual package
LS-ACG-RJ45S-RJ45-ST-60M	RJ45 (with locking stud)	RJ45	6.2 mm	60 m	Black	-20°C~ 75°C	Individual package
LS-ACXP6-DIN-BNC-ST-5M	DIN 1.0/2.3	BNC	4 mm	5 m	Black	-30°C~75°C	Individual package
LS-ACXP6-DIN-DIN-HF-5M	DIN 1.0/2.3	DIN 1.0/2.3	5.0 mm	5 m	Black	-30°C~80°C	Individual package
LS-ACXP6-DIN-BNC-HF-5M	DIN 1.0/2.3	BNC	5 mm	5 m	Black	-30°C~80°C	Individual package
LS-ACXP6-DIN-HDBNC-HF-5M	DIN 1.0/2.3	HD-BNC	5 mm	5 m	Black	-30°C~80°C	Individual package

LS-ACXP6-DIN-UP-DIN-HF-5M	DIN 1.0/2.3	DIN 1.0/2.3 (angled)	5.0 mm	5 m	Black	-30 °C to 80 °C (-22 °F to 176 °F)	Individual package
LS-ACXP12-HDBNC-HDBNC-ST-5M	HD-BNC	HD-BNC	7 mm	5 m	Black	-20°C~ 80°C	Individual package
LS-ACXP12-HDBNC-HDBNC-HF-5M	HD-BNC	HD-BNC	5 mm	5 m	Black	-30 °C to 80 °C (-22 °F to 176 °F)	Individual package
LS-ACCL-SDR-SDR-ST-5M	SDR	SDR	9.5 mm	5 m	Black	-20°C~80°C	Individual package
LS-ACCL-SDR-MDR-HF-5M	SDR26	MDR26	9.5 mm	5 m	Black	-20°C~80°C	Individual package
LS-ACCL-MDR-MDR-HF-5M	MDR26	MDR26	9.5 mm	5 m	Black	-20°C~80°C	Individual package
LS-ACCL-SDR-SDR-HF-5M	SDR26	SDR26	9.5 mm	5 m	Black	-20 °C to 80 °C (-4 °F to 176 °F)	Individual package
LS-ACXP6-DIN-UP-DIN-HF-8M	DIN 1.0/2.3	DIN 1.0/2.3 (angled)	5.0 mm	8 m	Black	-30 °C to 80 °C (-22 °F to 176 °F)	Individual package
LS-ACCL-SDR-SDR-ST-7M	SDR	SDR	9.5 mm	7 m	Black	-20°C~80°C	Individual package
LS-ACCL-SDR-SDR-HF-7M	SDR26	SDR26	9.5 mm	7 m	Black	-20 °C to 80 °C (-4 °F to 176 °F)	Individual package
LS-ACCL-SDR-MDR-HF-7M	SDR26	MDR26	9.5 mm	7 m	Black	-20°C~80°C	Individual package
LS-ACCL-MDR-MDR-HF-7M	MDR26	MDR26	9.5 mm	7 m	Black	-20°C~80°C	Individual package
LS-ACXP6-DIN-DIN-ST-10M	DIN 1.0/2.3	DIN 1.0/2.3	4 mm	10 m	Black	-30°C~75°C	Individual package
LS-ACXP6-DIN-BNC-ST-10M	DIN 1.0/2.3	BNC	4 mm	10 m	Black	-30°C~75°C	Individual package
LS-ACXP6-DIN-DIN-HF-10M	DIN 1.0/2.3	DIN 1.0/2.3	5.0 mm	10 m	Black	-30°C~80°C	Individual package
LS-ACXP6-DIN-BNC-HF-10M	DIN 1.0/2.3	BNC	5 mm	10 m	Black	-30°C~80°C	Individual package
LS-ACXP6-DIN-HDBNC-HF-10M	DIN 1.0/2.3	HD-BNC	5 mm	10 m	Black	-30°C~80°C	Individual package
LS-ACXP6-DIN-UP-DIN-HF-10M	DIN 1.0/2.3	DIN 1.0/2.3 (angled)	4.1 mm	10 m	Black	-30 °C to 80 °C (-22 °F to 176 °F)	Individual package
LS-ACXP12-HDBNC-HDBNC-ST-10M	HD-BNC	HD-BNC	7 mm	10 m	Black	-20°C~ 80°C	Individual package
LS-ACXP12-HDBNC-HDBNC-HF-10M	HD-BNC	HD-BNC	5 mm	10 m	Black	-30 °C to 80 °C (-22 °F to 176 °F)	Individual package
LS-ACXP12-HDBNC-UP-HDBNC-HF-10M	HD-BNC	HD-BNC (angled)	5 mm	10 m	Black	-20 °C to 80 °C (-4 °F to 176 °F)	Individual package
LS-ACCL-SDR-SDR-AOC-8M-BASE	SDR26	SDR26(Board side with Type A USB3.0 power take-off connector)	5.6 ± 0.2 mm	8m	Black	0°C ~ 70°C	Individual package and paper box

LS-ACCL-SDR-SDR-AOC-8M-FULL	SDR26	SDR26(Board side with Type A USB3.0 power take-off connector)	5.6 ± 0.2 mm	8m	Black	0°C ~ 70°C	Individual package and paper box
LS-ACCL-SDR-MDR-AOC-8M-BASE	SDR26	MDR26(Board side with Type A USB3.0 power take-off connector)	5.6 ± 0.2 mm	8m	Black	0°C ~ 70°C	Individual package and paper box
LS-ACCL-SDR-MDR-AOC-8M-FULL	SDR26	MDR26(Board side with Type A USB3.0 power take-off connector)	5.6 ± 0.2 mm	8m	Black	0°C ~ 70°C	Individual package and paper box
LS-ACCL-SDR-SDR-AOC-10M-BASE	SDR26	SDR26(Board side with Type A USB3.0 power take-off connector)	5.6 ± 0.2 mm	10m	Black	0°C ~ 70°C	Individual package and paper box
LS-ACCL-SDR-SDR-AOC-10M-FULL	SDR26	SDR26(Board side with Type A USB3.0 power take-off connector)	5.6 ± 0.2 mm	10m	Black	0°C ~ 70°C	Individual package and paper box
LS-ACCL-SDR-SDR-AOC-15M-BASE	SDR26	SDR26(Board side with Type A USB3.0 power take-off connector)	5.6 ± 0.2 mm	15m	Black	0°C ~ 70°C	Individual package and paper box
LS-ACCL-SDR-SDR-AOC-15M-FULL	SDR26	SDR26(Board side with Type A USB3.0 power take-off connector)	5.6 ± 0.2 mm	15m	Black	0°C ~ 70°C	Individual package and paper box
LS-ACCL-SDR-MDR-AOC-15M-BASE	SDR26	MDR26(Board side with Type A USB3.0 power take-off connector)	5.6 ± 0.2 mm	15m	Black	0°C ~ 70°C	Individual package and paper box
LS-ACCL-SDR-MDR-AOC-15M-FULL	SDR26	MDR26(Board side with Type A USB3.0 power take-off connector)	5.6 ± 0.2 mm	15m	Black	0°C ~ 70°C	Individual package and paper box
LS-ACCL-SDR-SDR-AOC-20M-BASE	SDR26	SDR26(Board side with Type A USB3.0 power take-off connector)	5.6 ± 0.2 mm	20m	Black	0°C ~ 70°C	Individual package and paper box
LS-ACCL-SDR-SDR-AOC-20M-FULL	SDR26	SDR26(Board side with Type A USB3.0 power take-off connector)	5.6 ± 0.2 mm	20m	Black	0°C ~ 70°C	Individual package and paper box

More values per model (Cable mechanical, Jacket, Connector durability, Min. bending radius, Applicable scenario, Max. voltage, Certification, Max. U-type bending cycles, Max. ±90° bending cycles, Max. ±180° torsional cycles, Fiber type, Central wavelength...) are on each product page.

Performance

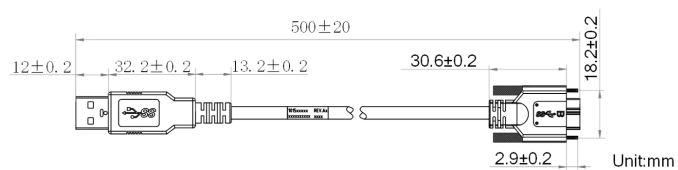

Product views

