


Dome light, 25.5 mm

LS-DOM-0037 series · Dome lights · 1 model

Dome light for diffuse, cloudy-day illumination of curved, shiny and reflective parts; the camera looks through the viewport. Lit area 1737 x 25.5 mm; 24 VDC supply; connection: flying leads. Choose colour below (8 configurations) and request a quote. Rendered illustration: the actual product may differ in appearance.

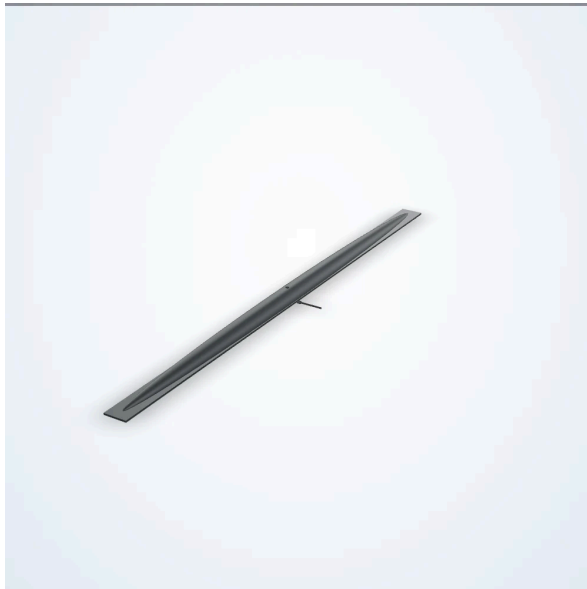

Options

Colour 455nm Blue, 470nm Blue, 530nm Green, 590nm Amber, 625nm Red, 850nm Infrared, 940nm Infrared, WHITE

Order by the full LS number of the chosen configuration; we confirm it with your quote.

Common specifications

Lit length (mm)	1737
Lit width (mm)	25.5
Length (mm)	1744
Width (mm)	77.9
Height (mm)	40.7
Voltage	24 VDC
Connector	Flying Leads
Connection at light	Hardwired
Cable length (mm)	2000
Driver included	No Driver Required
Driver location	No Driver
Operating modes	Constant On
Strobe trigger input	Constant On Only
Operating temperature	up to 60 °C
IP rating	IP67
Housing	Aluminum

