

Flat backlights

LS-LBFH-C series · Backlights · 5 models

Ultra-thin profile Special light-guide material for good uniformity

Features

- Ultra-thin profile
- Special light-guide material for good uniformity
- Added parallel film for better light directionality
- Available in custom sizes and wavelengths




Common specifications

Color	White
Color temperature	6000-7000K
Connector type	SMR-03V-B
Cable length	500 mm
Humidity	20% to 85% RH (non-condensing)
Temperature	Working temperature: 0 °C to 40 °C (32 °F to 104 °F); Storage temperature: -20 °C to 60 °C (-4 °F to 140 °F)
Diffuse plate included	Included

Models

Model	Power	Dimension	Emitting area dimension
LS-LBFH-50-50-W	3.4 W	82 mm × 82 mm × 12.5 mm	50 mm × 50 mm
LS-LBFH-100-100-W	3.3 W	132 mm × 132 mm × 12.5 mm	100 mm × 100 mm
LS-LBFH-200-150-W	4.6 W	232 mm × 182 mm × 12.5 mm	200 mm × 150 mm
LS-LBFH-300-200-W	4.1 W	332 mm × 232 mm × 14.5 mm	300 mm × 200 mm
LS-LBFH-400-300-W	10.6 W	432 mm × 332 mm × 14.5 mm	400 mm × 300 mm

Performance

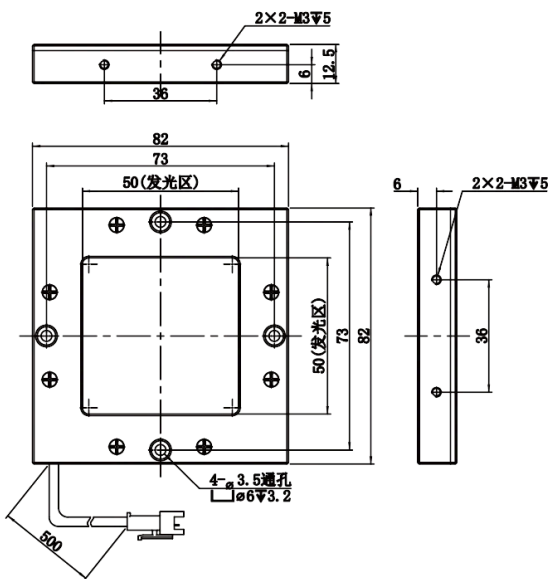

Product views



|

