

Classic coaxial lights

LS-LCDS-C series · Coaxial lights · 12 models

7 x 30 mm, White. Aluminum alloy housing for good heat dissipation High-density LED layout for high brightness

Features

- Aluminum alloy housing for good heat dissipation
- High-density LED layout for high brightness
- Available in custom sizes and wavelengths



Common specifications


Connector type	SMR-03V-B
Cable length	500 mm
Temperature	Working temperature: 0 °C to 40 °C (32 °F to 104 °F); Storage temperature: -20 °C to 60 °C (-4 °F to 140 °F)
Humidity	20% to 85% RH (non-condensing)
Diffuse plate included	Included

Models

Model	Color	Color temperature	Power	Dimension	Emitting area dimension	Wavelength
LS-LCDS-18-18-W	White	6000 ~ 7000K	2.1 W	53.7 mm × 30 mm × 27 mm	19 mm × 19 mm	-
LS-LCDS-30-30-W	White	6000 ~ 7000K	1.7 W	67 mm × 40 mm × 40 mm	32 mm × 30 mm	-
LS-LCDS-40-40-W	White	6000 ~ 7000K	6.1 W	70 mm × 46 mm × 47 mm	39 mm × 38 mm	-
LS-LCDS-40-40-R	Red	-	2.4 W	70 mm × 46 mm × 47 mm	39mm × 38 mm	625 nm
LS-LCDS-50-50-W	White	6000 ~ 7000K	5.4 W	90 mm × 60 mm × 65 mm	50 mm × 50 mm	-
LS-LCDS-55-40-W	White	6000 ~ 7000K	6 W	73 mm × 63 mm × 45 mm	55 mm × 40 mm	-
LS-LCDS-60-60-W	White	6000 ~ 7000K	8.1 W	90 mm × 70 mm × 70 mm	61 mm × 60 mm	-
LS-LCDS-80-80-W	White	6000 ~ 7000K	17.3 W	114 mm × 91 mm × 85.5 mm	80 mm × 80 mm	-
LS-LCDS-100-100-W	White	6000 ~ 7000K	28.8 W	134 mm × 111 mm × 105 mm	100 mm × 102 mm	-
LS-LCDS-100-100-R	Red	-	14.4 W	134 mm × 111 mm × 105 mm	100 mm × 102 mm	625 nm
LS-LCDS-120-120-W	White	6000 ~ 7000K	34.2 W	174mm × 130 mm × 134 mm	120 mm × 120 mm	-

LS-LCDS-140-140-W	White	6000 ~ 7000K	47.5 W	188 mm × 150 mm × 146 mm	140 mm × 140 mm	-
-------------------	-------	--------------	--------	--------------------------	-----------------	---

Performance

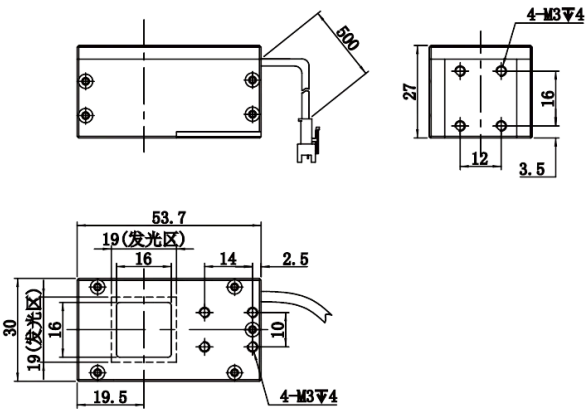

Product views

