

Classic spot lights

LS-LDSS-C series · Spot lights · 7 models

, UV 365 nm. High-power LEDs for high brightness One-piece aluminum alloy body for efficient heat dissipation

Features

- High-power LEDs for high brightness
- One-piece aluminum alloy body for efficient heat dissipation
- Compatible with mainstream telecentric lenses; custom non-standard sizes available



Common specifications


Connector type	SMR-03V-B
Cable length	500 mm
Temperature	Working temperature: 0 °C to 40 °C (32 °F to 104 °F); Storage temperature: -20 °C to 60 °C (-4 °F to 140 °F)
Humidity	20% to 85% RH (non-condensing)

Models

Model	Color	Wavelength	Power	Dimension	Outer dimension	Emitting area outer diameter	Diffuse plate included
LS-LDSS-8-3-UV365	UV	365 nm	1.3 W	Φ24 mm × 52 mm	Φ24 mm	Φ6 mm	None
LS-LDSS-8-3-IR850	Infrared	850 nm	2.5 W	Φ24 mm × 59 mm	Φ24 mm	Φ6 mm	None
LS-LDSS-8-3-R	Red	625 nm	1.8 W	Φ24 mm × 59 mm	Φ24 mm	Φ6 mm	Included
LS-LDSS-8-3-W	White	-	2.5 W	Φ24 mm × 59 mm	Φ24 mm	Φ6 mm	Included
LS-LDSS-8-3-B	Blue	465 nm	2.8 W	Φ24 mm × 59 mm	Φ24 mm	Φ6 mm	Included
LS-LDSS-30-5-B	Blue	465 nm	5 W	Φ30 mm × 38 mm	Φ30 mm	Φ25 mm	None
LS-LDSS-30-5-IR740	Infrared	740 nm	3 W	Φ30 mm × 38 mm	Φ30 mm	Φ25 mm	None

More values per model (Color temperature) are on each product page.

Performance

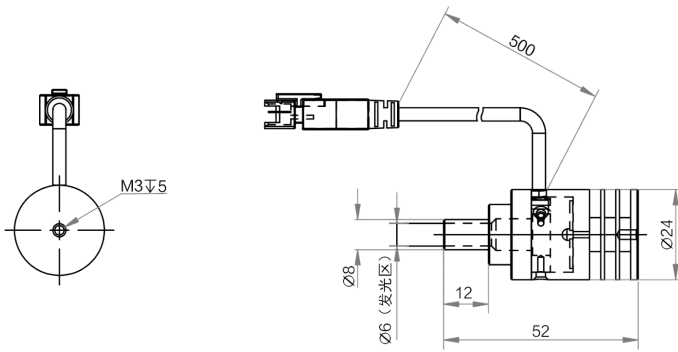

Product views

