

Lens adapter rings

LS-LENS-ADAPTER-RINGS series · Lens accessories · 14 models

O-F T34.5.
Supports lens
mount
conversion with
flexible
compatibility.

Features


- Supports lens mount conversion with flexible compatibility.



Models

Model	Camera mount	Lens mount	Thickness	Certification
LS-M42X1.0-F-T34.5	M42 × 1.0, flange back length 12 mm	F-mount, flange back length 46.5 mm	34.5 mm	RoHS 2.0
LS-C-C-T10	C-mount	C-mount	10 mm	RoHS 2.0
LS-C-C-T20	C-mount	C-mount	20 mm	RoHS 2.0
LS-M58X0.75-C-T6.02	M58 × 0.75, flange back length 11.48 mm	C-mount	6.02 mm	RoHS 2.0
LS-M58X0.75-F-T35	M58 × 0.75, flange back length 11.48 mm	F-mount, flange back length 46.5 mm	35 mm	RoHS 2.0
LS-V004-X-ADAPTER-RING-M42X1.0-CS-T1	M42 × 1.0, flange back length 12 mm	CS-mount	1 mm	RoHS 2.0
LS-V004-X-ADAPTER-RING-M42X1.0-C-T5.5	M42 × 1.0, flange back length 12 mm	C-mount	5.5 mm	RoHS 2.0
LS-V031-ADAPTER-RING-M72X0.75-F-T34.5	M72 × 0.75, flange back length 12 mm	F-mount, flange back length 46.5 mm	34.5 mm	RoHS 2.0
LS-ADAPTER-RING-M72X0.75-F-T36.4	M72 × 0.75, flange back length 10.1 mm	F-mount, flange back length 46.5 mm	36.4 mm	RoHS 2.0
LS-V004-X-CS	M42 × 1.0, flange back length 12 mm	CS-Mount	1 mm	RoHS2.0
LS-V004-X-C	M42 × 1.0, flange back length 12 mm	C-Mount	5.5 mm	RoHS2.0
LS-M72-F-T36.4	M72 × 0.75, Flange focal distance 10.1 mm	F-mount, flange back length 46.5 mm	36.4 mm	RoHS2.0
LS-C-C-T5	C-Mount	C-Mount	5 mm	RoHS2.0
LS-V031-M72-F-T34.5	M72 × 0.75, Flange focal distance 12 mm	F-mount, flange back length 46.5 mm	34.5 mm	RoHS2.0

Performance

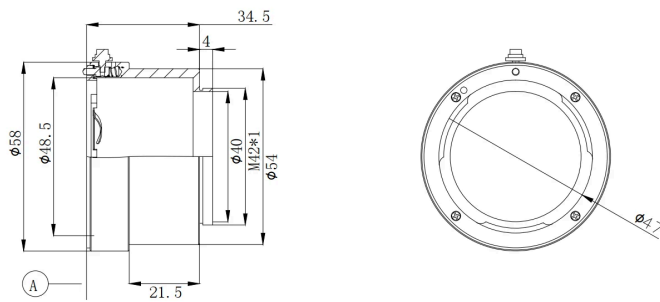

Product views

