

Flat shadowless lights

LS-LGES-C series · Shadowless lights · 4 models

, Red. Simple, compact structure, easy to install Special diffuser plate produces uniform high-angle lighting

Features

- Simple, compact structure, easy to install
- Special diffuser plate produces uniform high-angle lighting





Common specifications

Connector type	SMR-03V-B
Cable length	500 mm
LED rows	1
Bore dimension	Φ44 mm
Humidity	20% to 85% RH (non-condensing)
Temperature	Working temperature: 0 °C to 40 °C (32 °F to 104 °F); Storage temperature: -20 °C to 60 °C (-4 °F to 140 °F)
Diffuse plate included	Included

Models

Model	Color	Wavelength	Power	Dimension	Outer dimension	Emitting area dimension	Color temperature
LS-LGES-116-R	Red	625 nm	2.6 W	Φ116 mm × 17 mm	Φ116 mm	Φ90 mm	-
LS-LGES-116-W	White	-	3.4 W	Φ116 mm × 17 mm	Φ116 mm	Φ90 mm	6000~7000K
LS-LGES-160-R	Red	625 nm	4.3 W	Φ160 mm × 19.5 mm	Φ160 mm	Φ132 mm	-
LS-LGES-160-W	White	-	6.5 W	Φ160 mm × 19.5 mm	Φ160 mm	Φ132 mm	6000~7000K

Performance

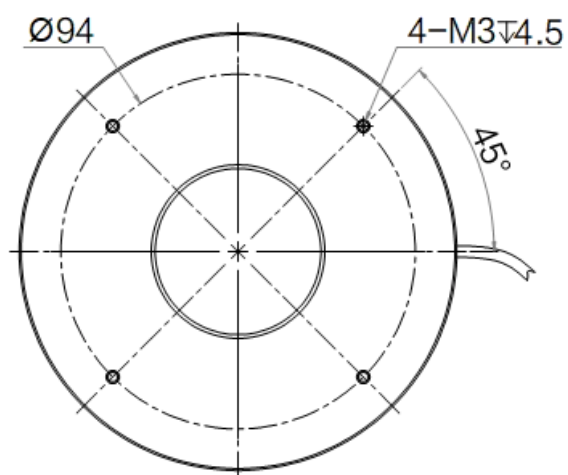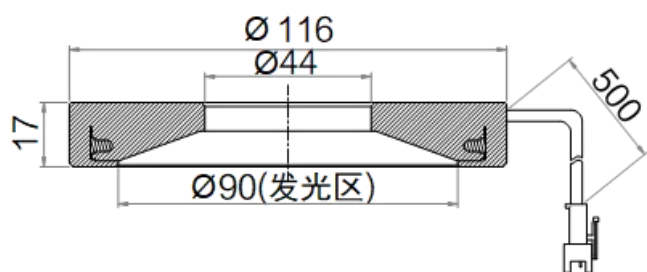

Product views

