

Dome lights

LS-LGSS-C series · Dome lights · 6 models

, White. Specially processed hemispherical diffuse wall for uniform diffuse lighting High-power SMD LEDs for high brightness

Features

- Specially processed hemispherical diffuse wall for uniform diffuse lighting
- High-power SMD LEDs for high brightness
- Available in custom sizes and wavelengths
- Multiple camera viewing holes can be added to suit the application




Common specifications

Connector type	SMR-03V-B
Cable length	500 mm
Temperature	Working temperature: 0 °C to 40 °C (32 °F to 104 °F); Storage temperature: -20 °C to 60 °C (-4 °F to 140 °F)
Humidity	20% to 85% RH (non-condensing)
Diffuse plate included	Included

Models

Model	Color	Color temperature	Power	Outer dimension	Bore dimension	Emitting area dimension	Wavelength
LS-LGSS-116-W	White	6000~7000K	16 W	Φ116 mm	Φ25 mm	Φ66 mm	-
LS-LGSS-116-R	Red	-	11 W	Φ116 mm	Φ25 mm	Φ66 mm	625 nm
LS-LGSS-175-W	White	6000~7000K	19.2W	Φ175 mm	Φ35 mm	Φ116 mm	-
LS-LGSS-175-R	Red	-	16 W	Φ175 mm	Φ35 mm	Φ116 mm	625 nm
LS-LGSS-198-W	White	6000~7000K	31 W	Φ198 mm	Φ30 mm	Φ138 mm	-
LS-LGSS-260-W	White	6000~7000K	41 W	Φ260 mm	Φ48 mm	Φ193 mm	-

Performance

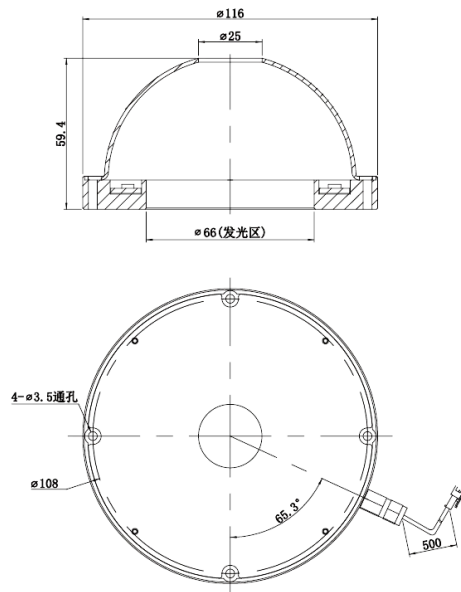

Product views

