

Light extension cables

LS-LIGHT-EXTENSION-CABLES series · Lighting accessories · 27 models

Provides high-quality cable(s) for drag chain use scenarios. Various lengths can be selected to meet the installation mode of different distances of the light sources (it should be noted that there is a certain voltage drop under a long distance).

Features

- Provides high-quality cable(s) for drag chain use scenarios.
- Various lengths can be selected to meet the installation mode of different distances of the light sources (it should be noted that there is a certain voltage drop under a long distance).




Models

Model	Channel	End A connector	End B connector	Length	Cable diameter	Cable jacket	Min. bending radius
LS-LW-H-001-1-19M8A	1	19M-8A	19M-8A	1 m	Φ8.75 mm	PVC	Cable: 105 mm; Cable plus connector tail: 130 mm
LS-LW-H-003-1-19M8A	1	19M-8A	19M-8A	3 m	Φ8.75 mm	PVC	Cable: 105 mm; Cable plus connector tail: 130 mm
LS-LW-H-005-1-19M8A	1	19M-8A	19M-8A	5 m	Φ8.75 mm	PVC	Cable: 105 mm; Cable plus connector tail: 130 mm
LS-LW-H-001-1-S	1	SMR-03V-B	SMR-03V-BC	1 m	Φ5 mm	PVC	60 mm
LS-LW-H-003-1-S	1	SMR-03V-B	SMR-03V-BC	3 m	Φ5 mm	PVC	60 mm
LS-LW-H-005-1-S	1	SMR-03V-B	SMR-03V-BC	5 m	Φ5 mm	PVC	60 mm
LS-LW-H-007-1-S	1	SMR-03V-B	SMR-03V-BC	7 m	Φ5 mm	PVC	60 mm
LS-LW-005-1-B	1	12M-2B	12M-2A	5 m	φ5.5 mm	PVC	66 mm
LS-LW-005-1-K	1	20M-4K	20M-4J	5 m	φ7.3 mm	PVC	87.6 mm
LS-LW-003-1-S	1	SMR-03V-BC	SMR-03V-B	3 m	φ4 mm	TPU	48 mm
LS-LW-003-2-S	2	SMR-03V-BC	SMR-03V-B	3 m	φ5 mm	TPU	60 mm
LS-LW-001-1-S	1	SMR-03V-BC	SMR-03V-B	1 m	φ4 mm	TPU	48 mm
LS-LW-005-1-S	1	SMR-03V-BC	SMR-03V-B	5 m	φ4 mm	TPU	48 mm
LS-LW-005-1-G	1	19M-6G	19M-6H	5 m	φ9.5 mm	PVC	114 mm

LS-LW-005-1-B19	1	19M-2E	19M-2A	5 m	φ7.5 mm	PVC	90 mm
LS-LW-H-010-1-19M8A	1	19M-8A	19M-8A	10 m	φ8.75 mm	PVC	Cable: 105 mm; Cable plus connector tail: 130 mm
LS-LW-H-010-1-S	1	SMR-03V-B	SMR-03V-BC	10 m	φ5 mm	PVC	60 mm
LS-LW-010-1-S	1	SMR-03V-BC	SMR-03V-B	10 m	φ4 mm	TPU	48 mm
LS-LW-H-015-1-19M8A	1	19M-8A	19M-8A	15 m	φ8.75 mm	PVC	Cable: 105 mm; Cable plus connector tail: 130 mm
LS-LW-H-015-1-S	1	SMR-03V-B	SMR-03V-BC	15 m	φ5 mm	PVC	60 mm
LS-LW-015-1-K	1	20M-4K	20M-4J	15 m	φ7.3 mm	TPU	87.6 mm
LS-LW-015-1-S	1	SMR-03V-BC	SMR-03V-B	15 m	φ4 mm	PVC	48 mm
LS-LW-015-1-B19	1	19M-2E	19M-2A	15 m	φ7.5 mm	TPU	90 mm
LS-LW-015-1-G	1	19M-6G	19M-6H	15 m	φ8.9 mm	PVC	106.8 mm
LS-LW-H-020-1-S	1	SMR-03V-B	SMR-03V-BC	20 m	φ5 mm	PVC	60 mm
LS-LW-020-1-B	1	12M-2B	12M-2A	20 m	φ5.5 mm	PVC	66 mm
LS-LW-H-030-1-S	1	SMR-03V-B	SMR-03V-BC	30 m	φ5 mm	PVC	60 mm

More values per model (Max. ±90° bending cycles, Connector durability, Flame resistance rating, Insulation, Withstand voltage capability, Temperature, Humidity, Ingress protection, Certification, Cable mechanical, Max. U-type bending cycles) are on each product page.

Performance

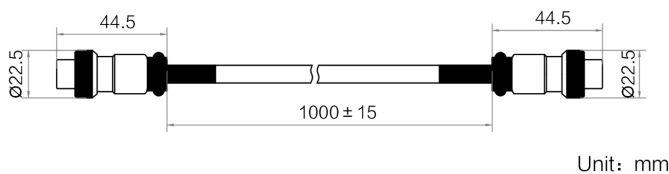

Product views

