

Bar lights

LS-LLAS-C series · Bar lights · 4 models

Angle adjustable for optimal lighting Brightness can be controlled together or individually

Features

- Angle adjustable for optimal lighting
- Brightness can be controlled together or individually




Common specifications

Color	White
Color temperature	6000~7000K
Irradiation angle	0° to 90° (single bar light)
Connector type	SMR-03V-B
Cable length	500 mm
Temperature	Working temperature: 0 °C to 40 °C (32 °F to 104 °F); Storage temperature: -20 °C to 60 °C (-4 °F to 140 °F)
Humidity	20% to 85% RH (non-condensing)
Diffuse plate included	Included

Models

Model	Power	LED rows	Dimension
LS-LLAS-78-W	3.6 W	2	78 mm × 78 mm × 25 mm
LS-LLAS-112-W	8.8 W	3	112 mm × 112 mm × 36 mm
LS-LLAS-154-W	11.5 W	5	154 mm × 154 mm × 42 mm
LS-LLAS-260-W	34.5 W	2	260 mm × 260 mm × 73 mm

Performance

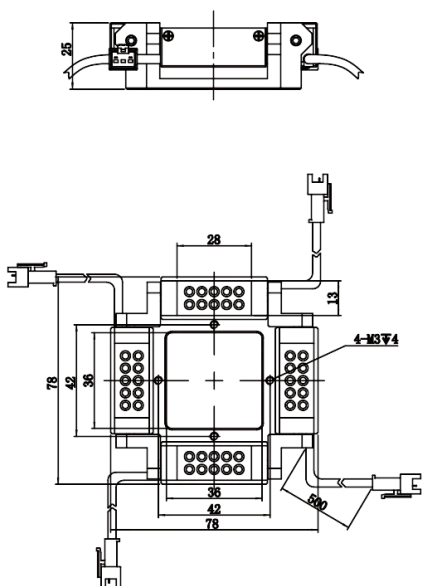

Product views

