


Classic angled ring lights

LS-LRDS-C series · Ring lights · 41 models

, 75°, White. Simple, compact structure, easy to install Multiple angles and flexible sizes

Features

- Simple, compact structure, easy to install
- Multiple angles and flexible sizes
- High-quality LEDs with stable, bright output

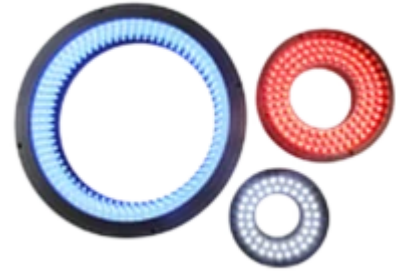

Common specifications

Cable length	500 mm
Temperature	Working temperature: 0 °C to 40 °C (32 °F to 104 °F); Storage temperature: -20 °C to 60 °C (-4 °F to 140 °F)
Humidity	20% to 85% RH (non-condensing)
Connector type	SMR-03V-B


Models

Model	Color	Irradiation angle	Bore dimension	LED rows	Dimension	Outer dimension	Power
LS-LRDS-34-75-W	White	75°	Φ10 mm	2	Φ34 × 19 mm	Φ34 mm	2.2 W
LS-LRDS-34-75-B	Blue	75°	Φ10 mm	2	Φ34 × 19 mm	Φ34 mm	1.9 W
LS-LRDS-42-65-W	White	65°	Φ18 mm	2	Φ42 × 18 mm	Φ42 mm	2.0 W
LS-LRDS-52-60-IR940	Infrared	60°	Φ28 mm	2	Φ52 × 20 mm	Φ52 mm	2.6 W
LS-LRDS-52-60-W	White	60°	Φ28 mm	2	Φ52 × 20 mm	Φ52 mm	2.9 W
LS-LRDS-53-90-W	White	90°	Φ25 mm	2	Φ53 × 17 mm	Φ53 mm	3.5 W
LS-LRDS-60-30-W	White	30°	Φ22 mm	2	Φ60 × 18 mm	Φ60 mm	3.9 W
LS-LRDS-60-30-B	Blue	30°	Φ22 mm	2	Φ60 × 18 mm	Φ60 mm	3.5 W
LS-LRDS-60-0-R	Red	0°	Φ30 mm	1	Φ60 × 9 mm	Φ60 mm	0.8 W
LS-LRDS-73-90-W	White	90°	Φ36 mm	3	Φ73 × 17.5 mm	Φ73 mm	5.9 W
LS-LRDS-74-60-IR940	Infrared	60°	Φ35 mm	3	Φ74 × 20 mm	Φ74 mm	8 W
LS-LRDS-74-30-W	White	30°	Φ40 mm	2	Φ74 × 20 mm	Φ74 mm	3.9 W
LS-LRDS-74-30-IR940	Infrared	30°	Φ40 mm	2	Φ74 × 20 mm	Φ74 mm	5.7 W
LS-LRDS-74-60-W	White	60°	Φ35 mm	3	Φ74 × 20 mm	Φ74 mm	7.8 W
LS-LRDS-73-90-IR940	Infrared	90°	Φ36 mm	3	Φ73 × 17.5 mm	Φ73 mm	6.0 W
LS-LRDS-90-70-R	Red	70°	Φ44 mm	4	Φ90 × 20 mm	Φ90 mm	7.8 W

LS-LRDS-90-30-IR940	Infrared	30°	Φ50 mm	3	Φ90 × 21 mm	Φ90 mm	7.8 W
LS-LRDS-90-70-W	White	70°	Φ44 mm	4	Φ90 × 20 mm	Φ90 mm	9.8 W
LS-LRDS-90-30-W	White	30°	Φ50 mm	3	Φ90 × 21 mm	Φ90 mm	7.8 W
LS-LRDS-100-90-R	Red	90°	Φ40 mm	5	Φ100 × 18 mm	Φ100 mm	6.9 W
LS-LRDS-96-0-R	Red	0°	Φ60 mm	1	Φ96 × 10 mm	Φ96 mm	2.6 W
LS-LRDS-96-0-W	White	0°	Φ60 mm	1	Φ96 × 10 mm	Φ96 mm	2.9 W
LS-LRDS-100-90-W	White	90°	Φ40 mm	5	Φ100 × 18 mm	Φ100 mm	11.4 W
LS-LRDS-120-45-W	White	45°	Φ30 mm	8	Φ120 × 32.6 mm	Φ120 mm	19.9 W
LS-LRDS-120-30-W	White	30°	Φ80 mm	3	Φ120 × 23 mm	Φ120 mm	15 W
LS-LRDS-120-90-W	White	90°	Φ76 mm	3	Φ120 × 18 mm	Φ120 mm	15 W
LS-LRDS-120-30-B	Blue	30°	Φ80 mm	3	Φ120 × 23 mm	Φ120 mm	14 W
LS-LRDS-120-70-W	White	70°	Φ65 mm	4	Φ120 × 22 mm	Φ120 mm	18 W
LS-LRDS-120-60-W	White	60°	Ø60 mm	5	Ø120 × 27 mm	Ø120 mm	14 W
LS-LRDS-120-0-WS	White	0°	Ø85 mm	1	Ø120 × 9 mm	Φ120 mm	4.3 W
LS-LRDS-132-20-W	White	20°	Φ96 mm	3	Φ132 × 22 mm	Φ132 mm	16 W
LS-LRDS-140-45-W	White	45°	Φ100 mm	4	Φ140 × 24 mm	Φ140 mm	13 W
LS-LRDS-146-0-W	White	0°	Φ104 mm	1	Φ146 × 11 mm	Φ146 mm	3.9 W
LS-LRDS-150-60-W	White	60°	Ø90 mm	5	Ø150 × 24 mm	Φ150 mm	21.6 W
LS-LRDS-170-20-W	White	20°	Φ134 mm	3	Φ170 × 22 mm	Φ170 mm	31.2 W
LS-LRDS-172-0-W	White	0°	Φ130 mm	1	Φ172 × 11 mm	Φ172 mm	6.9 W
LS-LRDS-180-30-W	White	30°	Φ132 mm	5	Φ180 × 27 mm	Φ180 mm	39 W
LS-LRDS-180-60-W	White	60°	Φ126 mm	4	Φ180 × 21 mm	Φ180 mm	29 W
LS-LRDS-180-15-W	White	15°	Φ142 mm	4	Φ180 × 26 mm	Φ180 mm	16.97 W
LS-LRDS-200-90-W	White	90°	Φ132 mm	5	Φ200 × 16 mm	Φ200 mm	18.4 W
LS-LRDS-213-0-W	White	0°	Φ175 mm	1	Φ213 × 11 mm	Φ213 mm	6.7 W

More values per model (Color temperature, Diffuse plate included, Wavelength) are on each product page.

Performance

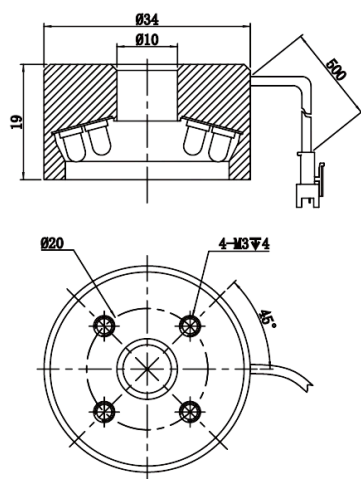

注：此光源可选配漫射板

Product views

