


Ring lights

LS-LRM-C series · Ring lights · 3 models

, IR 940 nm. Simple, compact structure, easy to install Multiple angles and flexible sizes

Features

- Simple, compact structure, easy to install
- Multiple angles and flexible sizes
- High-quality LEDs for stable, bright illumination

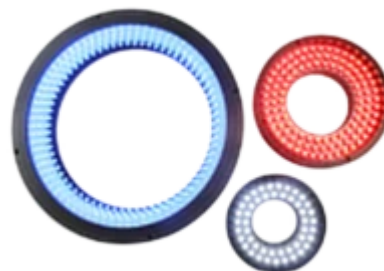


Common specifications

Color temperature	6000~7000K
Irradiation angle	30°
Connector type	SMR-03V-B
Cable length	500 mm
Temperature	Working temperature: 0 °C to 40 °C (32 °F to 104 °F); Storage temperature: -20 °C to 60 °C (-4 °F to 140 °F)
Humidity	20% to 85% RH (non-condensing)
Diffuse plate included	Included

Models

Model	Color	Wavelength	Power	LED rows	Dimension	Outer dimension	Bore dimension
LS-LRM-74-30-IR940	White/IR/UV	IR940: 940 nm; UV 365: 365 nm	W: 5.2 W; IR940: 4.8 W; UV365: 4.8 W	2	Φ74 × 20 mm	Φ74 mm	Φ40 mm
LS-LRM-90-30-W	White	-	7.8 W	3	Φ90 × 21 mm	Φ90 mm	Φ50 mm
LS-LRM-120-30-W	White	-	11.4 W	3	Φ120 × 23 mm	Φ120 mm	Φ80 mm

Performance

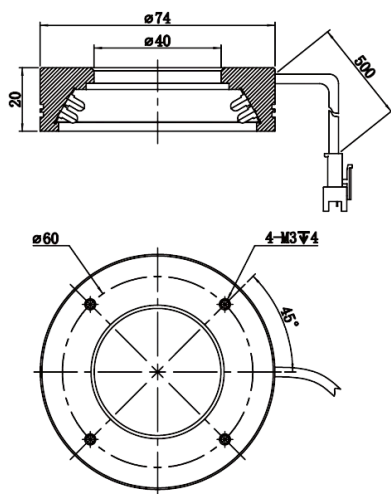

注：此光源可选配漫射板

Product views

