


Standard ring lights

LS-LRSS series · Ring lights · 6 models

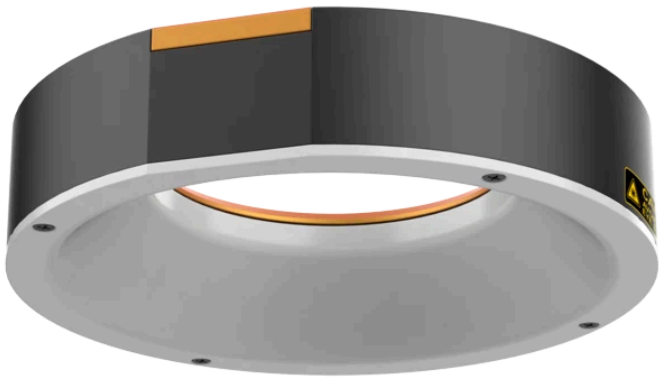

, White. Provides high uniformity illumination. Supports various sizes of outer diameter.

Features

- Provides high uniformity illumination.
- Supports various sizes of outer diameter.


Common specifications

Color	White
Color temperature	6000 ~ 7000K
Connector type	SMR-03V-B
Input voltage	24 VDC
LED rows	1
Cable length	1 m
Temperature	Working temperature: 0 °C to 40 °C (32 °F to 104 °F); Storage temperature: -20 °C to 60 °C (-4 °F to 140 °F)
Humidity	20% RH to 90% RH (no condensation)
Diffuse plate included	PMMA

Models

Model	Center illuminance	Best working distance	Power	Dimension	Bore dimension	Emitting area length	Weight
LS-LRSS-H-80-W	≥14000 Lux@WD=100 mm	30~50 mm	8.7 W	Φ80 mm × 18 mm	Φ40 mm	Φ66 mm	131 g
LS-LRSS-H-120-W	≥15000 Lux@WD=100 mm	30~60 mm	13.1 W	Φ120 mm × 18 mm	Φ75 mm	Φ106 mm	224 g
LS-LRSS-H-160-W	≥18000 Lux@WD=100 mm	30~80 mm	17.4 W	Φ160 mm × 18 mm	Φ116 mm	Φ146 mm	298 g
LS-LRSS-H-200-W	≥19000 Lux@WD=100 mm	30~80 mm	21.8 W	Φ200 mm × 34 mm	Φ148 mm	Φ186 mm	564 g
LS-LRSS-H-250-W	≥20000 Lux@WD=100 mm	60~120 mm	26.2 W	Φ250 mm × 34 mm	Φ190 mm	Φ236 mm	763 g
LS-LRSS-H-300-W	≥20000 Lux@WD=100 mm	60~120 mm	30.5 W	Φ300 mm × 34 mm	Φ248 mm	Φ286 mm	870 g

Performance

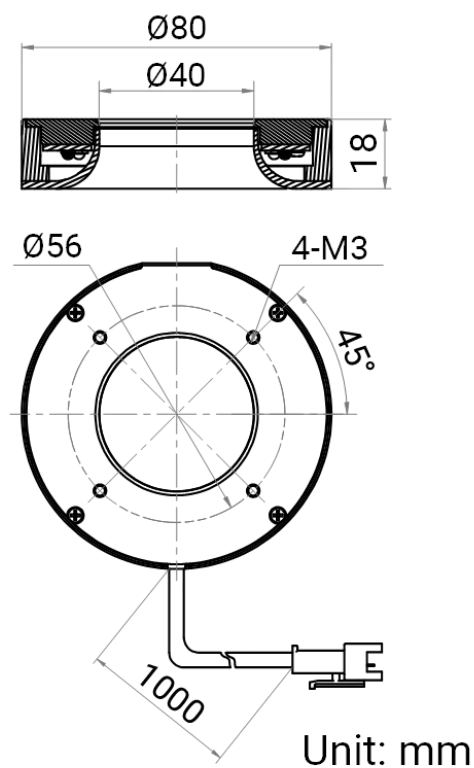

Product views

