

Classic ring lights

LS-LRSS-C series · Ring lights · 6 models

, White. Wide-angle SMD LEDs for high uniformity
Available in custom single-color and multi-color versions

Features

- Wide-angle SMD LEDs for high uniformity
- Available in custom single-color and multi-color versions



Common specifications


Connector type	SMR-03V-B
LED rows	1
Cable length	500 mm
Temperature	Working temperature: 0 °C to 40 °C (32 °F to 104 °F); Storage temperature: -20 °C to 60 °C (-4 °F to 140 °F)
Humidity	20% to 85% RH (non-condensing)
Diffuse plate included	Included

Models

Model	Color	Color temperature	Power	Dimension	Outer dimension	Bore dimension	Emitting area length
LS-LRSS-80-W	White	6000 ~ 7000K	7.7 W	Φ80 mm × 24 mm	Φ80 mm	Φ40 mm	Φ71 mm
LS-LRSS-80-R	Red	-	7.7 W	Φ80 × 24 mm	Φ80 mm	Φ40 mm	Φ71 mm
LS-LRSS-116-W	White	6000 ~ 7000K	11.8 W	Φ116 mm × 25.5 mm	Φ116 mm	Φ66 mm	Φ100 mm
LS-LRSS-116-B	Blue	-	11.8 W	Φ116 × 25.5 mm	Φ116 mm	Φ66 mm	Φ100 mm
LS-LRSS-116-R	Red	-	8.4 W	Φ116 × 25.5 mm	Φ116 mm	Φ66 mm	Φ100 mm
LS-LRSS-196-W	White	6000 ~ 7000K	21 W	Φ196 mm × 25.5 mm	Φ196 mm	Φ146 mm	Φ180 mm

More values per model (Wavelength) are on each product page.

Performance

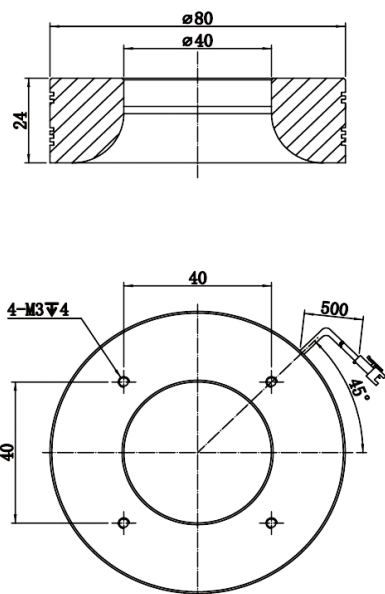

Product views

