


Line scan light, 203.2 mm lit length

LS-LSC-0002 series · Line scan lights · 1 model

High-intensity line light for line scan cameras on moving webs and conveyors. Lit area 203.2 x 25.9 mm; 24 VDC supply; connection: flying leads. Choose colour below (4 configurations) and request a quote. Rendered illustration: the actual product may differ in appearance.

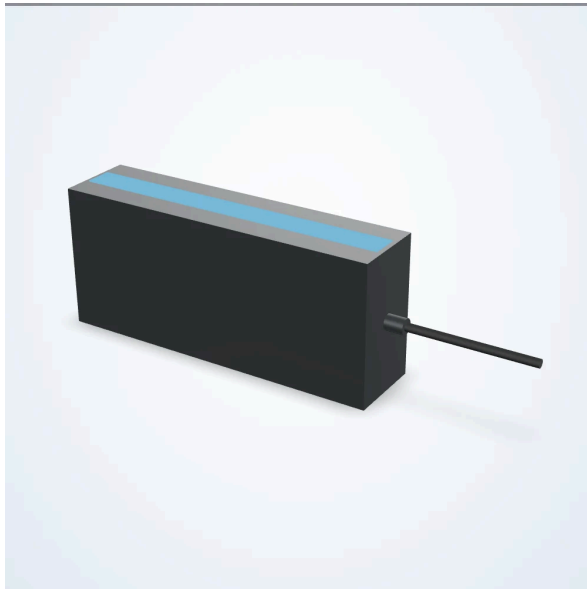

Options

Colour 470nm Blue, 530nm Green, 625nm Red, WHITE

Order by the full LS number of the chosen configuration; we confirm it with your quote.

Common specifications

Lit length (mm)	203.2
Lit width (mm)	25.9
Length (mm)	209.3
Width (mm)	50.2
Height (mm)	90.7
Voltage	24 VDC
Connector	Flying Leads
Connection at light	Hardwired
Cable length (mm)	2000
Driver included	No Driver Required
Driver location	No Driver
Operating modes	Constant On
Strobe trigger input	Not Dimmable
Operating temperature	up to 60 °C
IP rating	IP50
Housing	Aluminum
Mounting	T-Slot Channel
Collimated	Not Collimated

Daisy chain	No
Diffused	Not Diffused
Direct connect	No
Driver nomenclature	24V
Maximum constant on current (ma)	1044
Maximum duty cycle (%)	100
Maximum input power constant on (w)	25.1
Polarized	Not Polarized
Compliance	CE, IEC 62471, RoHS

Models

Model
LS-LSC-0002

Product views

