


62.99 x 23.8 mm line scan light

LS-LSC-0017 series · Line scan lights · 49 models

99 x 23.8 mm line scan light. Lit area 46.38 x 19.05 mm. Connection: Flying Leads. Available in 112 configurations (collimated, color, driver included, driver location); choose one below and request a quote. Rendered illustration: the actual product may differ in appearance.

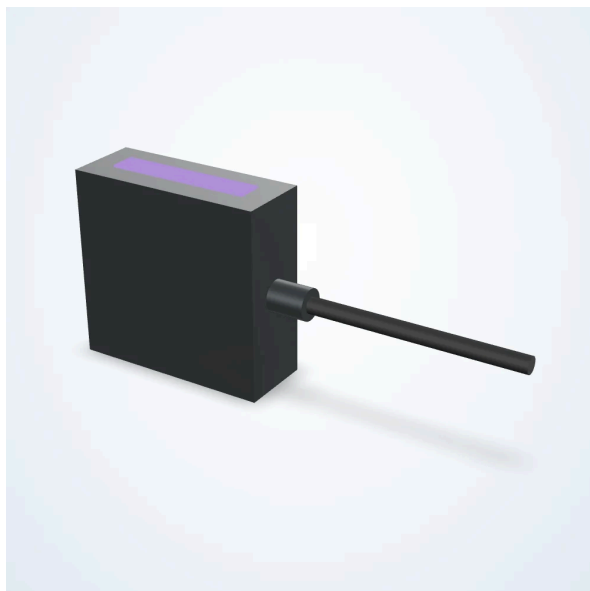

Common specifications

Active Width (mm)	19.05
Cable Length (mm)	2000
Compliances	CE, IEC 62471, RoHS
Connector Type	Flying Leads
Connectorized At Light	Hardwired
Daisy Chain	No
Direct Connect	No
Housing Material	Aluminum
IP Rating	IP50
Maximum Duty Cycle (%)	100
Maximum Operating Temperature (C)	60
Maximum Operating Temperature (F)	140
Minimum Operating Temperature (F)	32
Mounting Method	T-Slot Channel
Polarized	Not Polarized
Voltage	24 VDC
Width (mm)	23.8

Models

Model	Active Length (mm)	Length (mm)	Product Weight (Kg)	Product Weight (Lbs)
-------	--------------------	-------------	---------------------	----------------------

LS-LSC-0017-L1	46.38	62.99	0.19	0.42
LS-LSC-0017-L2	125.32	139.19	0.21	0.46
LS-LSC-0017-L3	204.27	215.39	0.24	0.53
LS-LSC-0017-L4	243.74	253.49	0.25	0.55
LS-LSC-0017-L5	283.21	291.59	0.26	0.57
LS-LSC-0017-L6	362.15	367.79	0.29	0.64
LS-LSC-0017-L7	401.63	405.89	0.3	0.66
LS-LSC-0017-L8	441.1	443.99	0.31	0.68
LS-LSC-0017-L9	480.57	482.09	0.33	0.73
LS-LSC-0017-L10	520.04	520.19	0.34	0.75
LS-LSC-0017-L11	559.51	558.29	0.35	0.77
LS-LSC-0017-L12	598.98	596.39	0.36	0.79
LS-LSC-0017-L13	638.45	634.49	0.38	0.84
LS-LSC-0017-L14	677.93	672.59	0.39	0.86
LS-LSC-0017-L15	717.4	710.69	0.4	0.88
LS-LSC-0017-L16	756.87	748.79	0.41	0.9
LS-LSC-0017-L17	796.34	786.89	0.43	0.95
LS-LSC-0017-L18	835.81	824.99	0.44	0.97
LS-LSC-0017-L19	875.28	863.09	0.45	0.99
LS-LSC-0017-L20	914.76	901.19	0.46	1.01
LS-LSC-0017-L21	954.23	939.29	0.48	1.06
LS-LSC-0017-L22	993.7	977.39	0.49	1.08
LS-LSC-0017-L23	1033.17	1015.49	0.5	1.1
LS-LSC-0017-L24	1072.64	1053.59	0.51	1.12
LS-LSC-0017-L25	1112.11	1091.69	0.53	1.17
LS-LSC-0017-L26	1151.59	1129.79	0.54	1.19
LS-LSC-0017-L27	1191.06	1167.89	0.55	1.21
LS-LSC-0017-L28	1230.53	1205.99	0.56	1.23
LS-LSC-0017-L29	1270	1244.09	0.58	1.28
LS-LSC-0017-L30	1309.47	1282.19	0.59	1.3
LS-LSC-0017-L31	1348.94	1320.29	0.6	1.32
LS-LSC-0017-L32	1388.42	1358.39	0.61	1.35
LS-LSC-0017-L33	1427.89	1396.49	0.63	1.39
LS-LSC-0017-L34	1467.36	1434.59	0.64	1.41
LS-LSC-0017-L35	1506.83	1472.69	0.65	1.43
LS-LSC-0017-L36	1546.3	1510.79	0.66	1.46
LS-LSC-0017-L37	1585.77	1548.89	0.67	1.48
LS-LSC-0017-L38	1625.24	1586.99	0.69	1.52
LS-LSC-0017-L39	1664.72	1625.09	0.7	1.54

LS-LSC-0017-L40	1704.19	1663.19	0.71	1.57
LS-LSC-0017-L41	1743.66	1701.29	0.72	1.59
LS-LSC-0017-L42	1783.13	1739.39	0.73	1.61
LS-LSC-0017-L43	1822.6	1777.49	0.75	1.65
LS-LSC-0017-L44	1862.07	1815.59	0.76	1.68
LS-LSC-0017-L45	1901.55	1853.69	0.77	1.7
LS-LSC-0017-L46	1941.02	1891.79	0.78	1.72
LS-LSC-0017-L47	1980.49	1929.89	0.8	1.76
LS-LSC-0017-L48	2019.96	1967.99	0.81	1.79
LS-LSC-0017-L49	2059.43	2006.09	0.82	1.81

Product views

