


Line scan light series, 90.7 mm high, Flying Leads

LS-LSC-S02 series · Line scan lights · 15 models

Lit area 203.2 x 25.9 mm; 24 VDC supply; connection: flying leads. Choose colour below (4 configurations) and request a quote. Rendered illustration: the actual product may differ in appearance.

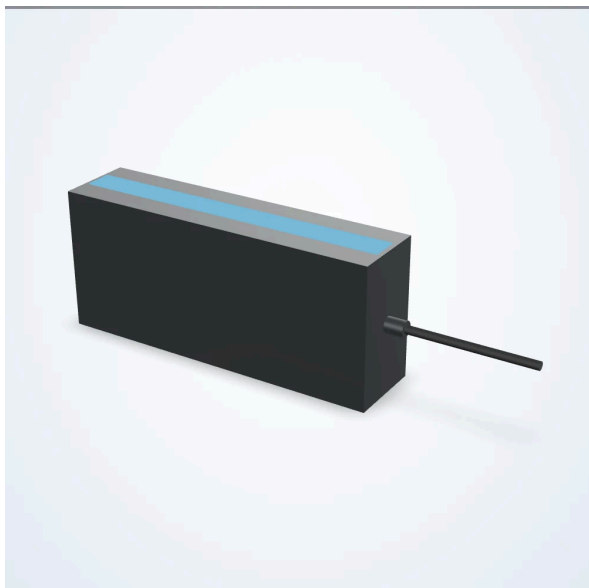

Common specifications

Lit width (mm)	25.9
Width (mm)	50.2
Height (mm)	90.7
Voltage	24 VDC
Connector	Flying Leads
Connection at light	Hardwired
Cable length (mm)	2000
Driver included	No Driver Required
Driver location	No Driver
Operating modes	Constant On
Strobe trigger input	Not Dimmable
Operating temperature	up to 60 °C
IP rating	IP50
Housing	Aluminum
Mounting	T-Slot Channel
Collimated	Not Collimated
Daisy chain	No
Diffused	Not Diffused
Direct connect	No
Maximum duty cycle (%)	100
Polarized	Not Polarized
Compliance	CE, IEC 62471, RoHS

Models

Model	Lit length (mm)	Length (mm)	Maximum constant on current (ma)	Maximum input power constant on (w)
LS-LSC-0002	203.2	209.3	1044	25.1
LS-LSC-0003	355.6	361.7	1804	43.3
LS-LSC-0004	508	514.1	2564	61.5
LS-LSC-0005	660.4	666.5	3324	79.8
LS-LSC-0006	812.8	818.9	4084	98
LS-LSC-0007	965.2	971.3	4844	116.3
LS-LSC-0008	1118	1124	5604	134.5
LS-LSC-0009	1270	1276	6364	152.7
LS-LSC-0010	1422	1428	7124	171
LS-LSC-0011	1575	1581	7884	189.2
LS-LSC-0012	1727	1733	8644	207.5
LS-LSC-0013	1880	1886	9404	225.7
LS-LSC-0014	2032	2038	10164	243.9
LS-LSC-0015	2184	2190	10924	262.2
LS-LSC-0016	2337	2343	11684	280.4

Product views

