

High-brightness line lights

LS-LTHS-C series · Line scan lights · 22 models

One-piece aluminum alloy housing with fan for good heat dissipation Imported high-power LEDs with brightness up to 100 × 10,000 lux

Features

- One-piece aluminum alloy housing with fan for good heat dissipation
- Imported high-power LEDs with brightness up to 100 × 10,000 lux
- Nut slots on top and bottom for flexible mounting



Common specifications


LED rows	1
Temperature	Working temperature: 0 °C to 40 °C (32 °F to 104 °F); Storage temperature: -20 °C to 60 °C (-4 °F to 140 °F)
Humidity	20% to 85% RH (non-condensing)
Diffuse plate included	Included

Models

Model	Color	Wavelength	Connector type	Power	Dimension	Emitting area dimension	Color temperature
LS-LTHS-100-R	Red	625 nm	19M-6H	48 W	143 mm × 58 mm × 90.1 mm	100 mm × 17 mm	-
LS-LTHS-100-W	White	-	19M-6H	48 W	143 mm × 58 mm × 90.1 mm	100 mm × 17 mm	6000 ~ 7000K
LS-LTHS-200-W	White	-	19M-6H	96 W	243 mm × 58 mm × 90.1 mm	200 mm × 17 mm	6000 ~ 7000K
LS-LTHS-300-W	White	-	19M-6H	129.6 W	343 mm × 58 mm × 90.1 mm	300 mm × 17 mm	6000 ~ 7000K
LS-LTHS-350-W	White	-	19M-6H	173 W	393 mm × 58 mm × 90.1 mm	350 mm × 17 mm	6000 ~ 7000K
LS-LTHS-400-WX	White	-	SA1613-S7B	96 W	420 mm × 113 mm × 45 mm	400 mm × 33 mm	6000 ~ 7000K
LS-LTHS-400-W	White	-	19M-6H	172.8 W	443 mm × 58 mm × 90.1 mm	400 mm × 17 mm	6000 ~ 7000K
LS-LTHS-500-W	White	-	19M-6H	216 W	543 mm × 58 mm × 90.1 mm	500 mm × 17 mm	6000 ~ 7000K
LS-LTHS-600-W	White	-	19M-6H	259.2 W	643 mm × 58 mm × 90.1 mm	600 mm × 17 mm	6000 ~ 7000K

LS-LTHS-700-W	White	-	Dual-channel 19M-6H	307.2 W	770 mm × 58 mm × 90.1 mm	700 mm × 17 mm	6000 ~ 7000K
LS-LTHS-800-W	White	-	Dual-channel 19M-6H	384 W	870 mm × 58 mm × 90.1 mm	800 mm × 17 mm	6000 ~ 7000K
LS-LTHS-900-W	White	-	Dual-channel 19M-6H	393.6 W	970 mm × 58 mm × 90.1 mm	900 mm × 17 mm	6000 ~ 7000K
LS-LTHS-1000-W	White	-	Dual-channel 19M-6H	432 W	1070 mm × 58 mm × 90.1 mm	1000 mm × 17 mm	6000 ~ 7000K
LS-LTHS-1100-W	White	-	Dual-channel 19M-6H	480 W	1170 mm × 58 mm × 90.1 mm	1100 mm × 17 mm	6000 ~ 7000K
LS-LTHS-1200-W	White	-	Dual-channel 19M-6H	514.8 W	1270 mm × 58 mm × 90.1 mm	1200 mm × 17 mm	6000 ~ 7000K
LS-LTHS-1300-W	White	-	Dual-channel 19M-6H	576 W	1370 mm × 58 mm × 90.1 mm	1300 mm × 17 mm	6000 ~ 7000K
LS-LTHS-1500-W	White	-	Dual-channel 19M-6H	653 W	1570 mm × 58 mm × 90.1 mm	1500 mm × 17 mm	6000 ~ 7000K
LS-LTHS-1600-W	White	-	Dual-channel 19M-6H	672 W	1670 mm × 58 mm × 90.1 mm	1600 mm × 17 mm	6000 ~ 7000K
LS-LTHS-1700-W	White	-	Dual-channel 19M-6H	734.4 W	1770 mm × 58 mm × 90.1 mm	1700 mm × 17 mm	6000 ~ 7000K
LS-LTHS-1800-W	White	-	Dual-channel 19M-6H	778 W	1870 mm × 58 mm × 90.1 mm	1800 mm × 17 mm	6000 ~ 7000K
LS-LTHS-1900-W	White	-	Dual-channel 19M-6H	820.8 W	1970 mm × 58 mm × 90.1 mm	1900 mm × 17 mm	6000 ~ 7000K
LS-LTHS-2000-W	White	-	Dual-channel 19M-6H	864 W	2070 mm × 58 mm × 90.1 mm	2000 mm × 17 mm	6000 ~ 7000K

Performance

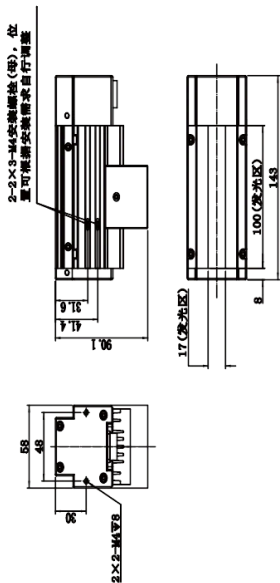

Product views

