


High-brightness line lights

LS-LTPM-C series · Line scan lights · 3 models

Modular design: coaxial module and high-brightness line light detach easily
One-piece aluminum alloy housing with fan for good heat dissipation

Features

- Modular design: coaxial module and high-brightness line light detach easily
- One-piece aluminum alloy housing with fan for good heat dissipation
- Nut slots on top and bottom for flexible mounting

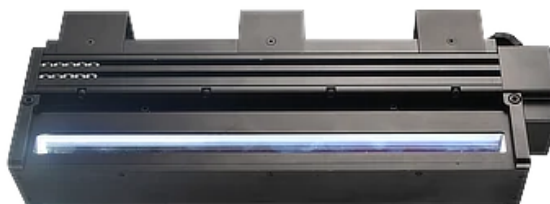


Common specifications

Color	White
Color temperature	6000 ~ 7000K
Connector type	19M-6H
Temperature	Working temperature: 0 °C to 40 °C (32 °F to 104 °F); Storage temperature: -20 °C to 60 °C (-4 °F to 140 °F)
Humidity	20% to 85% RH (non-condensing)
Diffuse plate included	Included

Models

Model	Power	Dimension	Emitting area dimension
LS-LTPM-100-W	48 W	143 mm × 128.1 mm × 57.3 mm	98 mm × 17 mm
LS-LTPM-200-W	96 W	243 mm × 128.1 mm × 57.3 mm	198 mm × 17 mm
LS-LTPM-300-W	130 W	343 mm × 128.1 mm × 57.3 mm	298 mm × 17 mm

Performance

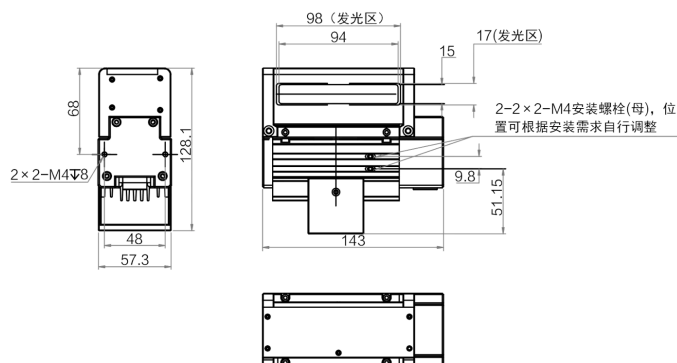

Product views

