


Ring light series, 45 mm high, 5 Pin M12 Male A-Coded (S22)

LS-RNG-S22 series · Ring lights · 2 models

24 VDC supply;
connection: 5
pin m12 male
a-coded.
Choose colour,
lens / beam
angle below (14
configurations)
and request a
quote.
Rendered
illustration: the
actual product
may differ in
appearance.

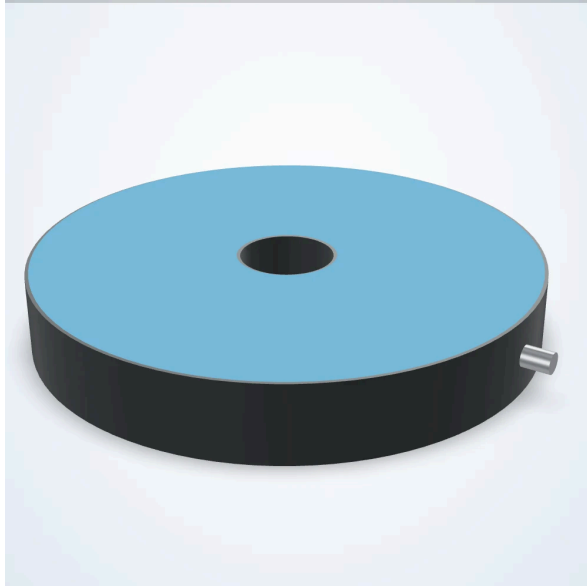

Common specifications

Height (mm)	45
Voltage	24 VDC
Connector	5 Pin M12 Male A-Coded
Connection at light	Connectorized
Intensity control	Analog Voltage, Integrated Potentiometer
Strobe trigger input	NPN Trigger, PNP Trigger
Operating temperature	18 to 40 °C
IP rating	IP65
Housing	Aluminum
Mounting	T-Slot Channels
Collimated	Not Collimated
Daisy chain	No
Diffused	Not Diffused
Direct connect	No
Maximum duty cycle (%)	100
NPN trigger current (ma)	15
NPN trigger voltage (v)	< 1 VDC
PNP trigger current (ma)	20
PNP trigger voltage (v)	4-24 VDC
Polarized	Not Polarized
Storage temperature	20 to 70 °C
Compliance	CE, IEC 62471, RoHS

Models

Model	Lit diameter (mm)	Outer diameter (mm)	Inner diameter (mm)	Viewport diameter (mm)	Driver included	Driver location	Operating modes
LS-RNG-0047	200	290	52.5	52.5	No Driver Required	No Driver	Constant On, Constant On – Dimmable, Overcurrent Strobe, Overcurrent Strobe – Dimmable
LS-RNG-0048	306	396	77.9	77.9	Included	Internal	Constant On, Constant On – Dimmable, Strobe, Strobe – Dimmable

More values per model (Max overcurrent strobe current, Max overcurrent strobe input power, Maximum constant on current (ma), Maximum current (overcurrent strobe) (ma), Maximum input power constant on (w), Maximum input power overcurrent strobe (w), Maximum overcurrent strobe duty cycle (%), Maximum overcurrent strobe frequency (hz), Maximum overcurrent strobe latency (us), Minimum overcurrent strobe duration (us), Max strobe duration, Maximum strobe current (ma)...) are on each product page.

Product views

