


Spot light, 60 x 56 mm lit area

LS-SPT-0004 series · Spot lights · 1 model

Compact spot light for small fields of view and high intensity at a distance. Lit area 60 x 56 mm; 24 VDC supply; connection: flying leads. Choose colour, lens / beam angle, operating modes, strobe trigger input, version below (144 configurations) and request a quote. Rendered illustration: the actual product may differ in appearance.

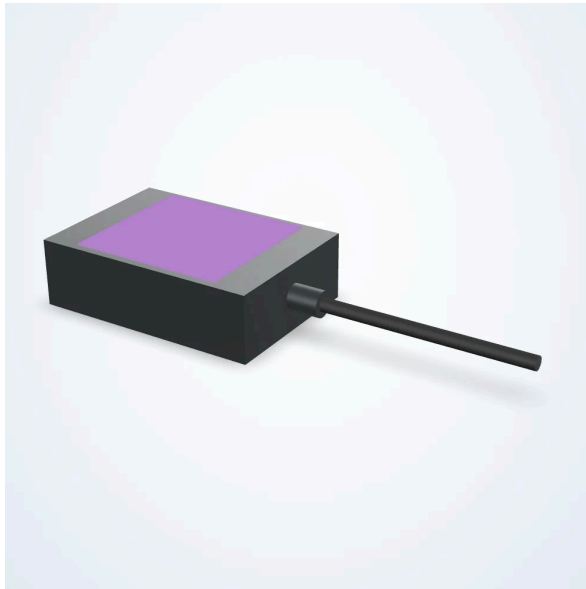

Options

Colour	365nm Ultraviolet (UV), 375nm Ultraviolet (UV), 385nm Ultraviolet (UV), 395nm Ultraviolet (UV), 405nm Violet, 455nm Blue, 470nm Blue, 505nm Cyan, 530nm Green, 590nm Amber, 625nm Red, 660nm Red, 730nm Infrared, 850nm Infrared, 940nm Infrared, WHITE
Lens / beam angle	21 Degree, 8 Degree, 29 Degree
Operating modes	Constant On, Constant On – Dimmable, Overcurrent Strobe, Overcurrent Strobe – Dimmable, Constant On, Constant On – Dimmable
Strobe trigger input	PNP Trigger, Constant On Only
Version	Version 1, Version 2, Standard

Order by the full LS number of the chosen configuration; we confirm it with your quote.

Common specifications

Lit length (mm)	60
Lit width (mm)	56
Length (mm)	87.8
Width (mm)	61.9
Height (mm)	26
Voltage	24 VDC
Connector	Flying Leads
Connection at light	Hardwired

Cable length (mm)	2000
Driver included	Included
Driver location	In Line
Intensity control	Analog Voltage
Operating temperature	up to 60 °C
IP rating	IP67
Housing	Aluminum
Mounting	Tapped Holes
Collimated	Not Collimated
Daisy chain	No
Diffused	Not Diffused
Direct connect	No
Driver nomenclature	iCS2 - IC (by configuration)
Maximum constant on current (ma)	320
Maximum current (overcurrent strobe) (ma)	8000 (by configuration)
Maximum duty cycle (%)	100
Maximum input power constant on (w)	7.7
Maximum input power overcurrent strobe (w)	125 (by configuration)
Maximum overcurrent strobe frequency (hz)	2000 (by configuration)
Maximum overcurrent strobe latency (us)	60 (by configuration)
Minimum overcurrent strobe duration (us)	30 (by configuration)
NPN trigger voltage (v)	< 1 VDC (by configuration)
PNP trigger current (ma)	5 (by configuration)
PNP trigger voltage (v)	2.5-30 VDC (by configuration)
Polarized	Not Polarized
Compliance	CE, IEC 62471, RoHS

Models

Model
LS-SPT-0004

Product views

