


## Spot light series, 93.5 mm high, 5 Pin M12 Male A-Coded (S15)

LS-SPT-S15 series · Spot lights · 3 models

Lit area 153 x 153 mm; 24 VDC supply; connection: 5 pin m12 male a-coded. Choose colour below (7 configurations) and request a quote. Rendered illustration: the actual product may differ in appearance.

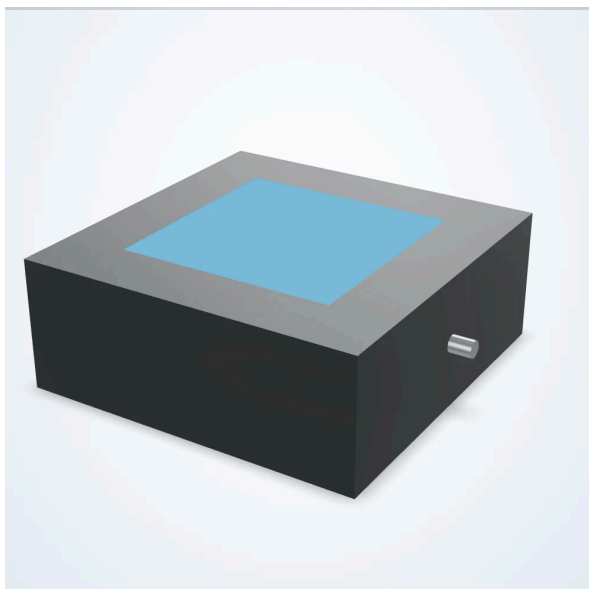

## Common specifications

|                          |                                     |
|--------------------------|-------------------------------------|
| Lens / beam angle        | Diffused                            |
| Height (mm)              | 93.5                                |
| Voltage                  | 24 VDC                              |
| Connector                | 5 Pin M12 Male A-Coded              |
| Connection at light      | Connectorized                       |
| Driver included          | Included                            |
| Driver location          | Internal                            |
| Intensity control        | Analog Voltage                      |
| Operating modes          | Constant On, Constant On – Dimmable |
| Strobe trigger input     | NPN Trigger, PNP Trigger            |
| Operating temperature    | 20 to 50 °C                         |
| IP rating                | IP50                                |
| Housing                  | Aluminum                            |
| Mounting                 | T-Slot Channels                     |
| Collimated               | Not Collimated                      |
| Daisy chain              | No                                  |
| Diffused                 | Diffused                            |
| Direct connect           | No                                  |
| Maximum duty cycle (%)   | 100                                 |
| NPN trigger current (ma) | 22                                  |
| NPN trigger voltage (v)  | < 1 VDC                             |
| PNP trigger current (ma) | 30.4                                |
| PNP trigger voltage (v)  | 3.3-24 VDC                          |
| Polarized                | Not Polarized                       |
| Storage temperature      | 20 to 50 °C                         |
| Compliance               | CE, IEC 62471, RoHS                 |

## Models

| Model       | Lit length (mm) | Lit width (mm) | Length (mm) | Width (mm) | Maximum constant on current (ma) | Maximum input power constant on (w) |
|-------------|-----------------|----------------|-------------|------------|----------------------------------|-------------------------------------|
| LS-SPT-0104 | 153             | 153            | 243         | 243        | 820                              | 19.7                                |
| LS-SPT-0105 | 306             | 153            | 396         | 243        | 1620                             | 38.9                                |
| LS-SPT-0106 | 306             | 306            | 396         | 396        | 3350                             | 80.4                                |

## Product views

