


Spot light series, 35.7 mm high, 5 Pin M12 Male A-Coded (S23)

LS-SPT-S23 series · Spot lights · 2 models

Lit area 46 x 69 mm; 24 VDC supply; connection: 5 pin m12 male a-coded. Choose colour, lens / beam angle, polarized below (40 configurations) and request a quote. Rendered illustration: the actual product may differ in appearance.

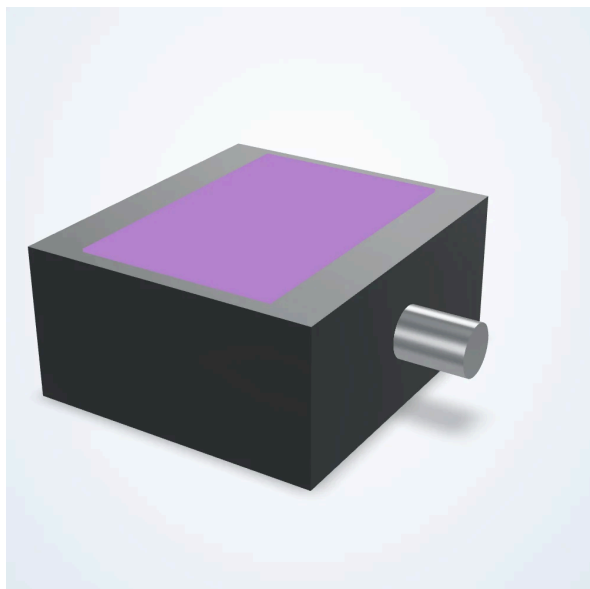

Common specifications

Lit length (mm)	46
Lit width (mm)	69
Length (mm)	69
Width (mm)	77
Height (mm)	35.7
Voltage	24 VDC
Connector	5 Pin M12 Male A-Coded
Connection at light	Connectorized
Driver included	Included
Driver location	Internal
Intensity control	Analog Voltage, Integrated Potentiometer
Strobe trigger input	NPN Trigger, PNP Trigger
IP rating	IP50
Housing	Plastic
Mounting	Through Holes
Collimated	Not Collimated
Daisy chain	No
Direct connect	No
Maximum duty cycle (%)	100
NPN trigger voltage (v)	< 1 VDC
PNP trigger voltage (v)	4-24 VDC
Compliance	CE, IEC 62471, RoHS

Models

Model	Operating modes	Operating temperature	Diffused	Maximum constant on current (ma)	Maximum input power constant on (w)	NPN trigger current (ma)	PNP trigger current (ma)
LS-SPT-0116	Constant On, Constant On - Dimmable, Overcurrent Strobe, Overcurrent Strobe - Dimmable	10 to 40 °C	Not Diffused	400	9.6	14	17.6
LS-SPT-0118	Constant On, Constant On - Dimmable	18 to 40 °C	Diffused	375	9	15	20

More values per model (Max overcurrent strobe current, Max overcurrent strobe input power, Maximum current (overcurrent strobe) (ma), Maximum input power overcurrent strobe (w), Maximum overcurrent strobe duty cycle (%), Maximum overcurrent strobe frequency (hz), Maximum overcurrent strobe latency (us), Minimum overcurrent strobe duration (us), Storage temperature, Lens / beam angle, Polarized) are on each product page.

Product views

