

Ultrathin flank back light (2FTC)

LS-2FTC series · Backlights · 10 models

A stable structure combined with ultra-thin thickness. Easy to install in the narrow space. High uniformity.

Features

- A stable structure combined with ultra-thin thickness
- Easy to install in the narrow space
- High uniformity
- Customized size for reference



Applications

- Glass surface scratch inspection
- PCB printing defect inspection
- Reflective surface defect inspection

Common specifications


Note	UV & IR light can be customized as required.
Voltage	24V

Models

Model	Model as printed	Dimension	Power
LS-2FTC3030 colours: R, B, G, W	LS-2FTC3030-R/BGW	L70xW70xH9.5(mm)	3.9W/3.9W
LS-2FTC5050 colours: R, B, G, W	LS-2FTC5050-R/BGW	L90xW90xH9.5(mm)	3.9W/7.7W
LS-2FTC6060 colours: R, B, G, W	LS-2FTC6060-R/BGW	L100xW100xH9.5(mm)	3.9W/7.7W
LS-2FTC100100 colours: R, B, G, W	LS-2FTC100100-R/BGW	L140xW140xH9.5(mm)	7.7W/11.6W
LS-2FTC150150 colours: R, B, G, W	LS-2FTC150150-R/BGW	L190xW190xH9.5(mm)	11.6W/15.4W
LS-2FTC200200 colours: R, B, G, W	LS-2FTC200200-R/BGW	L240xW240xH9.5(mm)	15.4W/19.2W

LS-2FTC250250 colours: R, B, G, W	LS-2FTC250250-R/BGW	L290xW290xH9.5(mm)	19.2W/23.1W
LS-2FTC300300 colours: R, B, G, W	LS-2FTC300300-R/BGW	L340xW340xH9.5(mm)	23.1W/30.8W
LS-2FTC360360 colours: R, B, G, W	LS-2FTC360360-R/BGW	L400xW400xH9.5(mm)	23.1W/30.8W
LS-2FTC450450 colours: R, B, G, W	LS-2FTC450450-R/BGW	L490xW490xH9.5(mm)	30.8W/38.4W

Dimensions

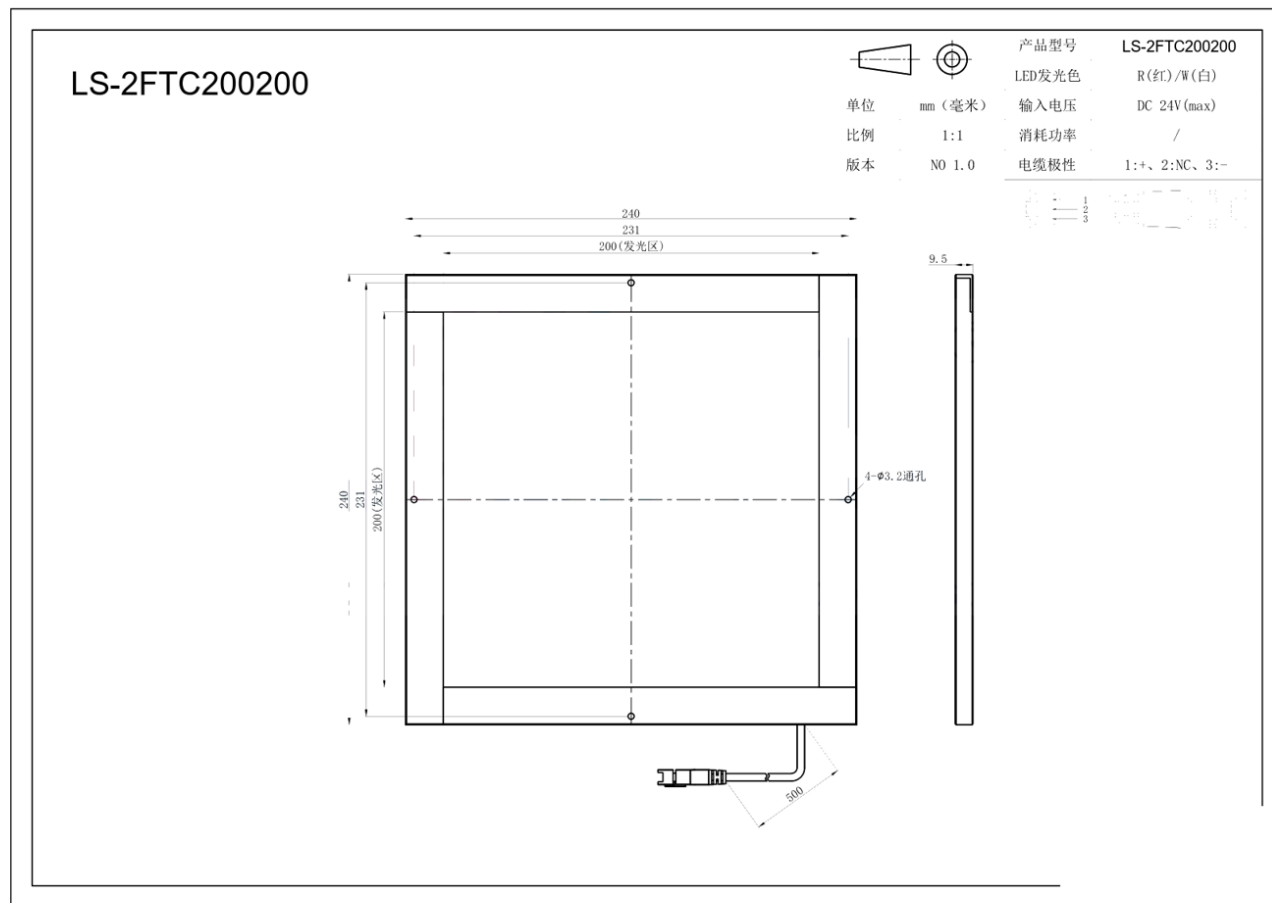


LS-2FTC200200



单位 mm (毫米)
比例 1:1
版本 NO 1.0

产品型号	LS-2FTC200200
LED发光色	R (红) / W (白)
输入电压	DC 24V (max)
消耗功率	/
电缆极性	1: +, 2: NC, 3: -

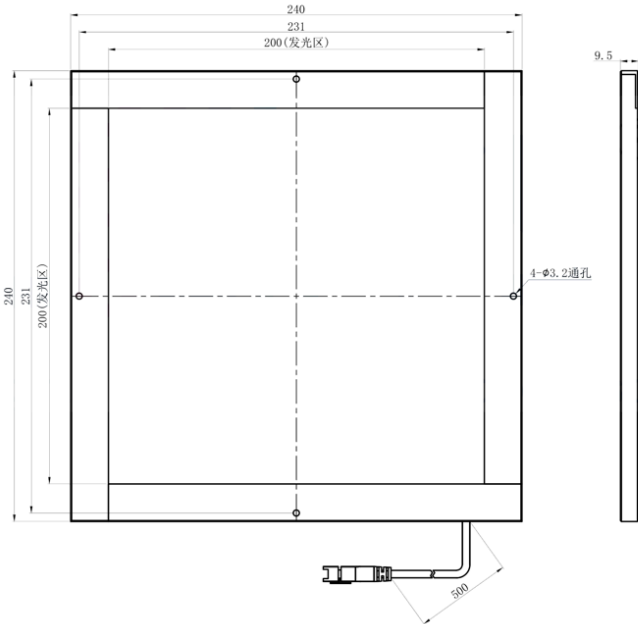

LS-2FTC3030

		产品型号	LS-2FTC3030
		LED发光色	R(红)/W(白)
单位	mm (毫米)	输入电压	DC 24V (max)
比例	1:1	消耗功率	/
版本	NO 1.0	电缆极性	1:+, 2:NC, 3:-

