

Ring shadowless light (2HPR)

LS-2HPR series · Shadowless lights · 6 models

Emitting light can be effectively utilized by using special diffuser, to realize high brightness and uniformity.

Features

- Suitable for uniform imaging from low distance to high distance
- Brightness increased, about 3 times higher than HPR series
- Adopt unique design structure, realize high brightness, high



Applications

- The inspection of date on the food packing
- The highlight or reflect surface of workpiece inspection

Common specifications


Note	UV & IR light can be customized as required.
Voltage	24V

Models


Model	Model as printed	Dimension	Power
LS-2HPR50 colours: R, B, G, W	LS-2HPR50-R/BGW	Outer dia. 50mm, Inner dia. 18mm, Height 17.5mm	3.6W/5.4W
LS-2HPR75 colours: R, B, G, W	LS-2HPR75-R/BGW	Outer dia. 91mm, Inner dia. 41mm, Height 25.5mm	9.0W/10.8W
LS-2HPR100 colours: R, B, G, W	LS-2HPR100-R/BGW	Outer dia. 116mm, Inner dia. 66mm, Height 25.5mm	9.0W/12.6W
LS-2HPR150 colours: R, B, G, W	LS-2HPR150-R/BGW	Outer dia. 166mm, Inner dia. 116mm, Height 25.5mm	14.4W/18.0W
LS-2HPR200 colours: R, B, G, W	LS-2HPR200-R/BGW	Outer dia. 216mm, Inner dia. 166mm, Height 25.5mm	16.2W/19.8W

LS-2HPR250 colours: R, B, G, W	LS-2HPR250-R/BGW	Outer dia. 266mm,Inner dia. 210mm,Height 25.5mm	18.0W/23.4W
-----------------------------------	------------------	---	-------------



Dimensions

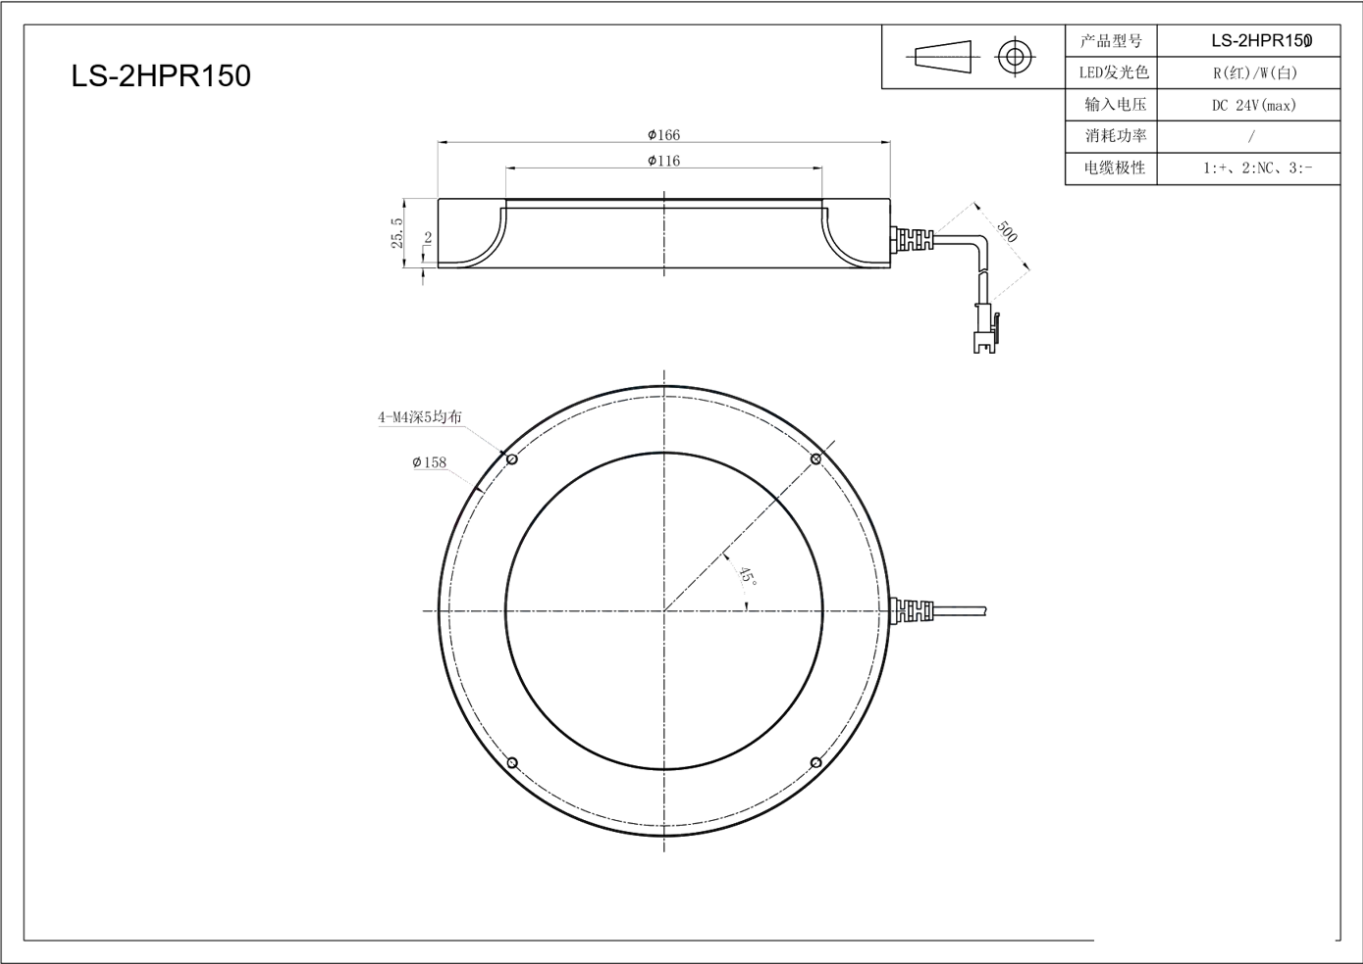


LS-2HPR150




产品型号	LS-2HPR150
LED发光色	R(红)/W(白)
输入电压	DC 24V(max)
消耗功率	/
电缆极性	1:+, 2:NC, 3:-

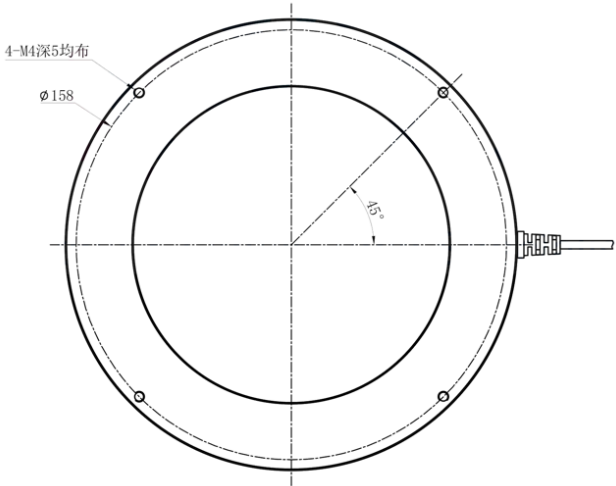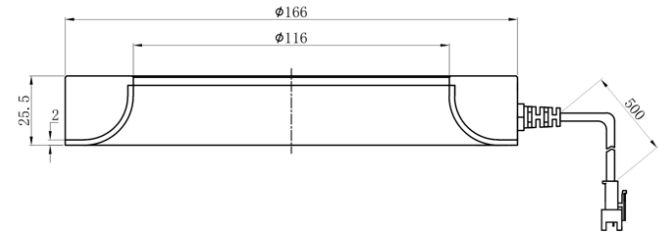


LS-2HPR50





产品型号	LS-2HPR50
LED发光色	R(红)/W(白)
输入电压	DC 24V(max)
消耗功率	/
电缆极性	1:+, 2:NC, 3:-

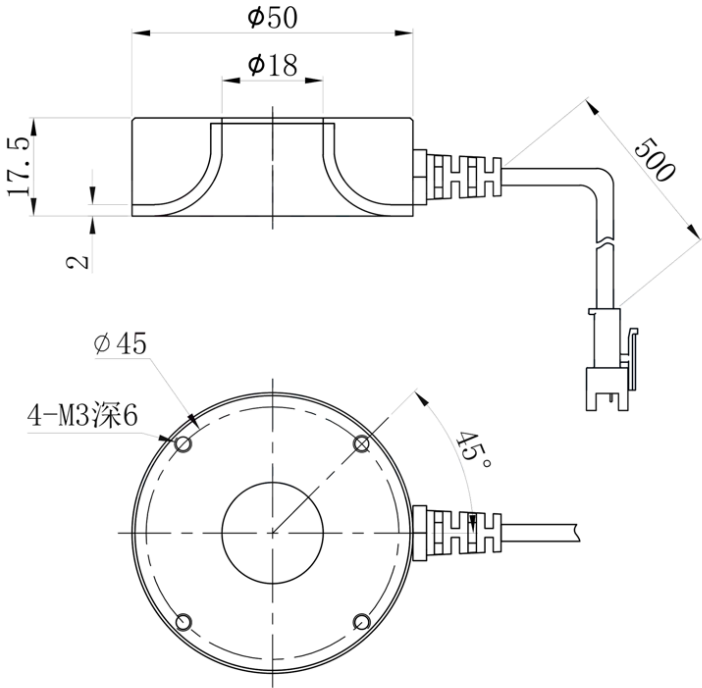

产品型号	LS-2HPR75
LED发光色	R(红)/W(白)
输入电压	DC 24V(max)
消耗功率	/
电缆极性	1:+, 2:NC、3:-

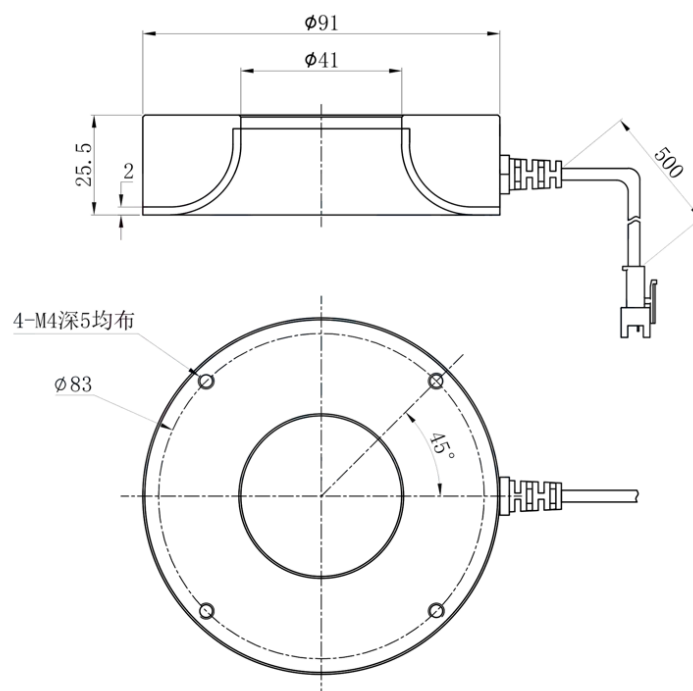

- ◆ The illumination is increased by approximately three times

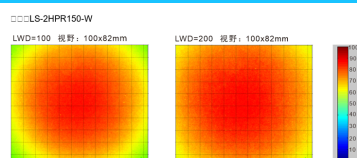

*以上图表仅供参考，实际数值可能会有差异。