

Small tunnel line scan light (2MDL)

LS-2MDL series · Line scan lights · 10 models

Compact size, light weight, illuminance up to 200,000 LX. Uses high-efficiency LED, which emits evenly diffused light onto the arch shape. Can eliminate shadows caused by workpiece unevenness, helping improve overall imaging uniformity.



Features

- Compact size, light weight, illuminance up to 200,000 LX
- Uses high-efficiency LED, which emits evenly diffused light onto the arch shape
- Can eliminate shadows caused by workpiece unevenness, helping improve overall imaging uniformity
- Natural cooling for heat dissipation, suitable for substrate manufacturing processes or cleanroom environments

Applications

- PCB board printing inspection
- Vacuum packaging bag inspection
- Metal surface inspection
- Glass surface gloss inspection

LS-2MDL600



产品型号

LS-2MDL600

LED发光色

R(红)/W(白)

单位

mm (毫米)

输入电压

DC 24V(max)

比例


1:1

消耗功率

/

版本

NO 1.0

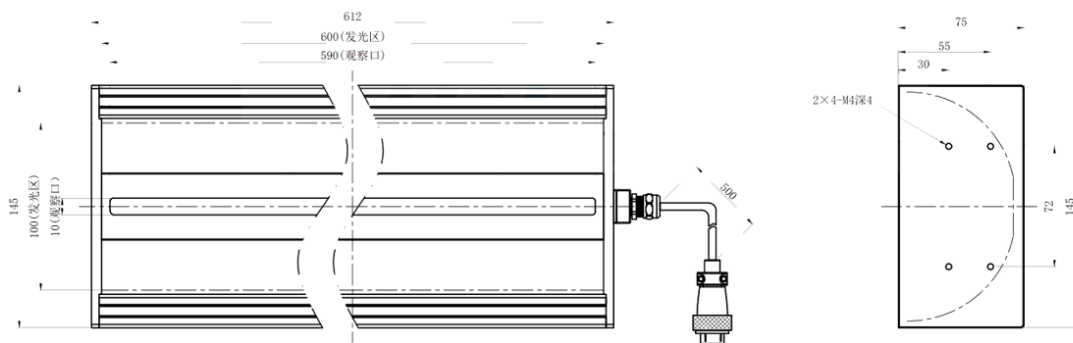

Copyright 2011~2025 LOTS. All rights reserved. Reproduction or photocopy without permission is prohibited.

LS-2MDL600




产品型号 LS-2MDL600

LED发光色 R(红)/W(白)

单位 mm(毫米) 输入电压 DC 24V(max)

比例 1:1 消耗功率 /

版本 NO 1.0

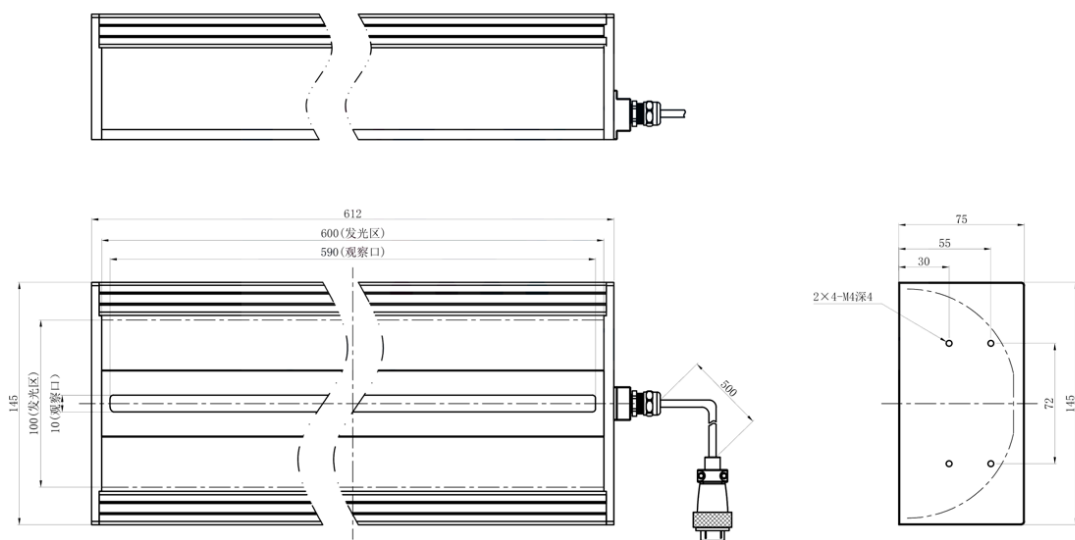

LS-2MDL100




产品型号 LS-2MDL100

LED发光色 R(红)/W(白)

单位 mm(毫米) 输入电压 DC 24V(max)

比例 1:1 消耗功率 /

版本 NO 1.0

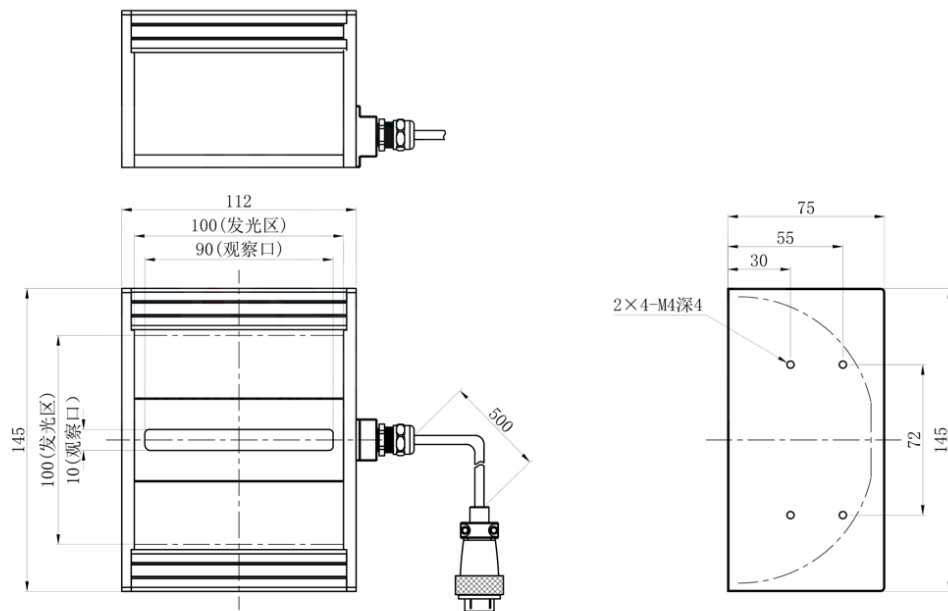

LS-2MDL500




产品型号 LS-2MDL500

LED发光色 R(红)/W(白)




单位 mm(毫米) 输入电压 DC 24V(max)

比例 1:1 消耗功率 /

版本 NO 1.0

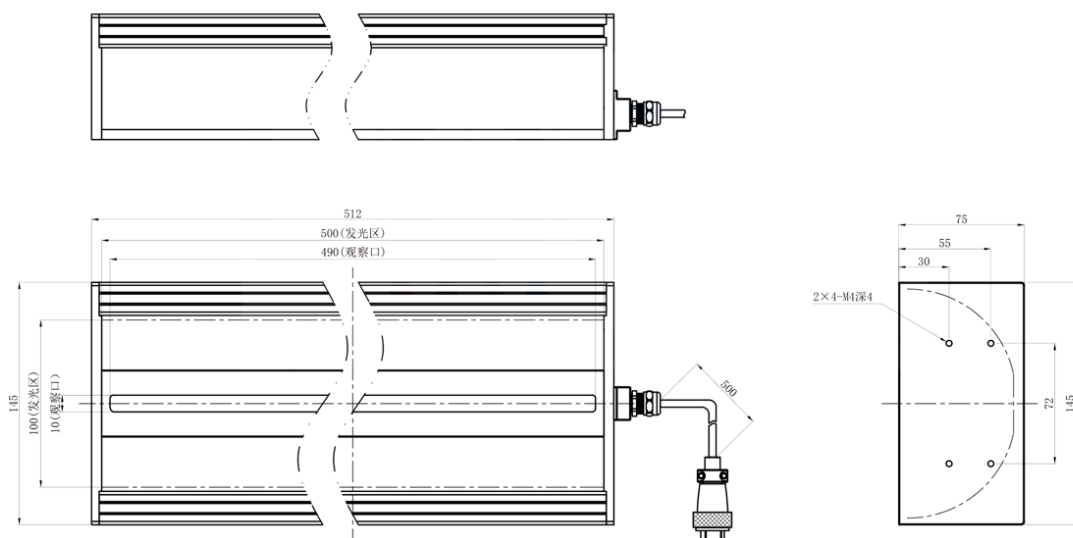

Performance

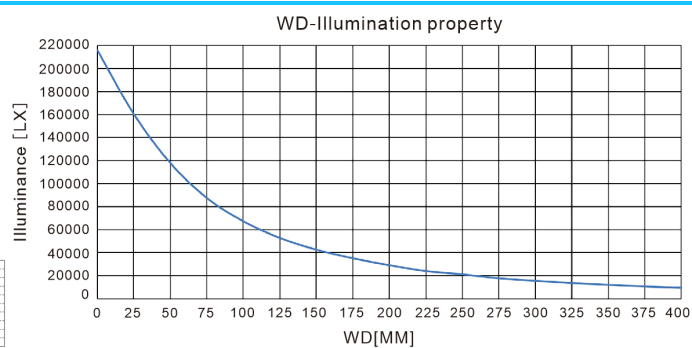

*Above diagram only for reference.