

Laser fiber light (2SLG350)

LS-2SLG-LASER series · Custom lights · 1 model

Laser Fiber Light (light box) the maximum white brightness is approximately 30 million Lx, and the frequency can reach 8KHZ.



Features

- The LCD display screen shows the status and set actions
- It can be manually adjusted or externally controlled through software
- Constant current dimming, with adjustable dimming levels of 256/1024
- Support RS232 communication and Ethernet communication
- It is equipped with overcurrent protection, over-temperature protection and power-off preservation functions
- The maximum white brightness is approximately 30 million Lx, and the frequency can reach 8KHZ

Applications


- Electron endoscope
- Automotive endoscope
- Industrial endoscope
- Optical fiber

Models


Model	Model as printed	Output power	Dimension	External trigger voltage	Color temp.	CRI	Emitting angle
LS-2SLG350 colours: W	LS-2SLG350-W	350W	L193.5xW155xH203(mm)	Strobe / constant on using External trigger voltage 5-24V	7000K	70	50°

More values per model (luminance value, Compatible fiber diameter(mm), Color, Average life span, Drive mode, Input voltage, Number of channels, Baud rate, Input frequency range, Luminance control method, Luminance control level, Protection functions...) are on each product page.

Dimensions

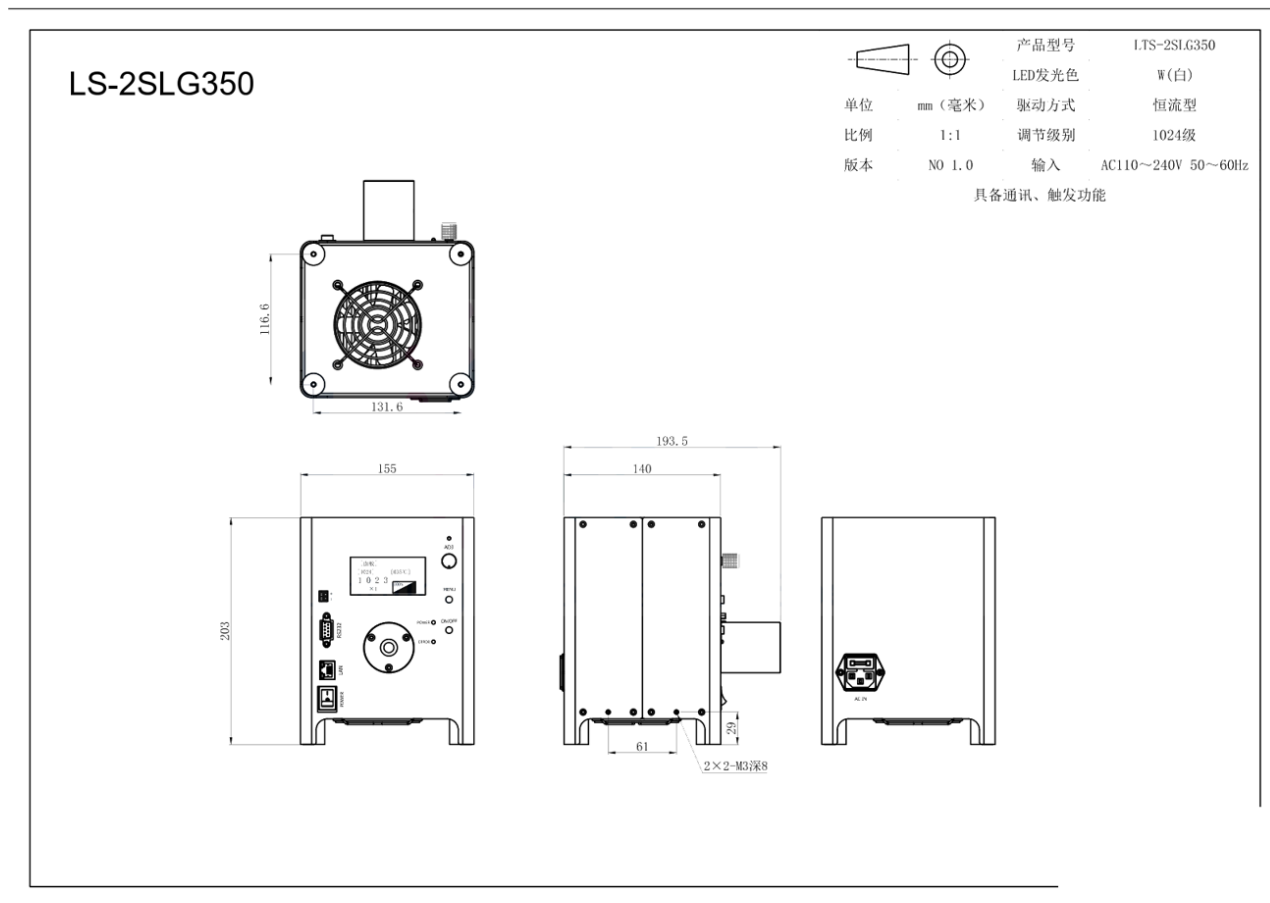

LS-2SLG350

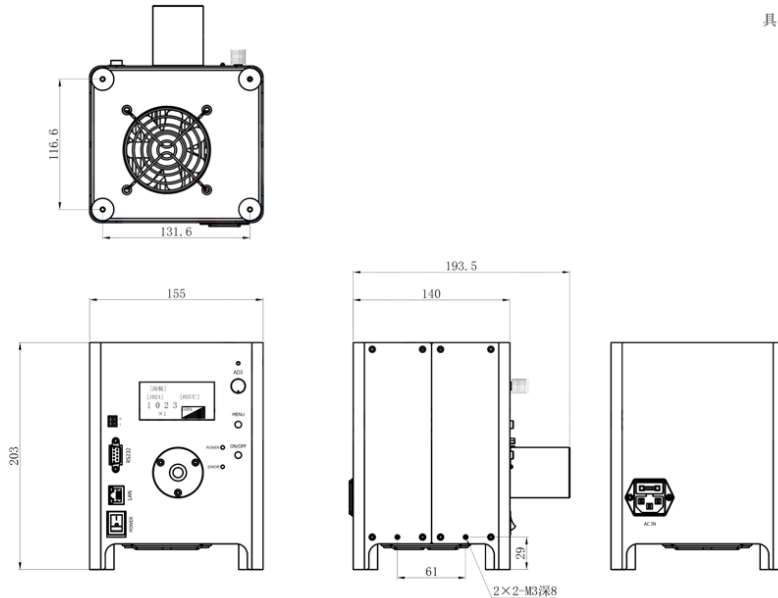


产品型号	LS-2SLG350
LED发光色	W(白)
驱动方式	恒流型
调节级别	1024级
输入	AC110~240V 50~60Hz
版本	NO 1.0
具备通讯、触发功能	


Copyright 2011~2025 LOTS. All rights reserved. Reproduction or photocopy without permission is prohibited.

Performance


Illumination property diagram




Linearity graph



Spectrum chart



Micro-module wafer application diagram

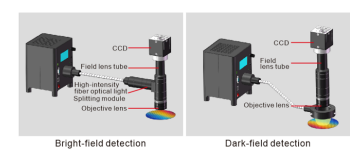

Brightness comparison chart



Option

