

RGB fiber optic light (2SLG-RGB)

LS-2SLG-RGB series · Custom lights · 1 model

RGB fiber optic light a single unit can achieve RGB tricolor illumination, separate or mixed color lighting options. Saves space and supports three optical imaging functions.



Features


- A single unit can achieve RGB tricolor illumination, separate or mixed color lighting options
- Saves space and supports three optical imaging functions
- Touch screen LCD display status and setting
- With continuous on / IO trigger function, the brightness is adjustable
- External trigger mode/internal trigger mode
- RS232/LAN communication
- With over current /over temperature/ power off protection

Models





Model	Model as printed	Output power	Color	Dimension	External trigger voltage	Communication method	Baud rate
LS-2SLG250-RGB colours: R, G, B	LS-2SLG250	250W	RGB	L166.9xW172xH203(mm)	5-24V	RS232/LAN communication	19200bps

More values per model (Operating mode, Trigger mode, Trigger response time, Compatible fiber diameter, Drive mode, Luminance control level, Luminance control method, Language option, Warning function, Input voltage, Memory protection feature, Insulation and voltage resistance...) are on each product page.

Dimensions

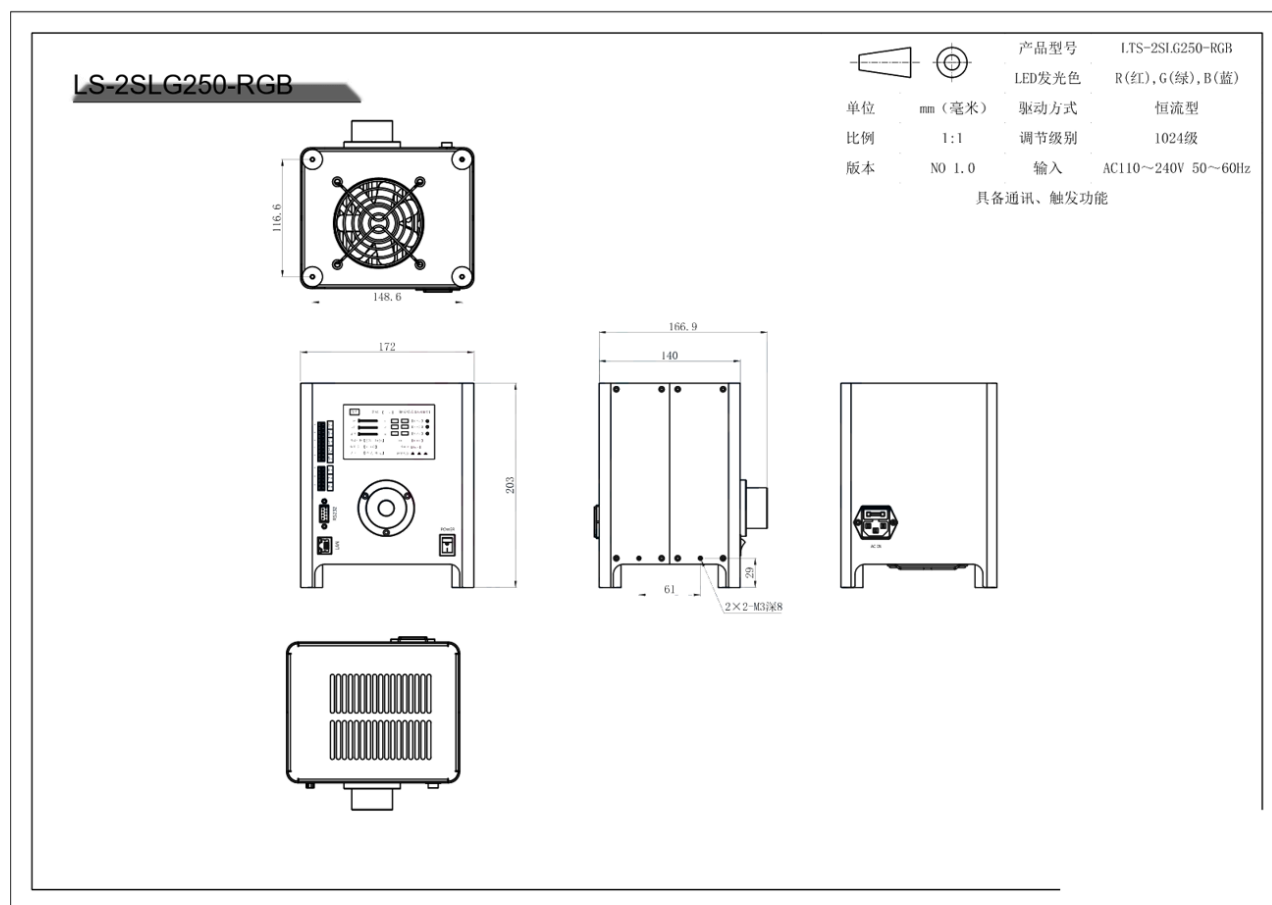

LS-2SLG250-RGB



单位 mm (毫米)

比例 1:1

版本 NO 1.0

产品型号 LS-2SLG250-RGB

LED发光色 R(红), G(绿), B(蓝)

驱动方式 恒流型

调节级别 1024级

输入 AC110~240V 50~60Hz

具备通讯、触发功能

Copyright 2011~2025 LOTS. All rights reserved. Reproduction or photocopy without permission is prohibited.