

Constant current controller (3ACC)

LS-3ACC series · Light controllers · 11 models

Stable output current, good linearity. RS232 serial communication. LAN ethernet communication.

Features

- Stable output current, good linearity
- RS232 serial communication
- No flash at low exposure time
- External trigger



Common specifications

Trigger voltage	High level 5-24V effective
Input voltage	AC 100-240V
Input frequency range	50/60Hz
Luminance adjustment method	Manual encoder knob adjustment, PC remote adjustment
Drive mode	Constant-current
Luminance adjustment level	256 Level
Memory function	Brightness parameters can be set to not be saved or to be automatically saved when power is cut off
Baud rate	19200bps
Communication mode	RS232
Operating environment	Humidity 20%-85%RH (frost free), temperature 0°C-50°C
Storage environment	Humidity 20%-85%RH (frost free), temperature 0°C-60°C
Constant on/off switch	H mode set by encoder knob: H1 constant on, H0 constant off
Extenal trigger voltage	5-24V


Models

Model	Product	One way output current	Total output power	One way Max. output power	Number of channels
LS-3ACC350-2C	Spot light controller	0-350mA	2W	1W	2
LS-3ACC350-4C	Spot light controller	0-350mA	4W	1W	4
LS-3ACC700-2C	Spot light controller	0-700mA	4W	2W	2
LS-3ACC700-4C	Spot light controller	0-700mA	8W	2W	4

LS-3ACC1000-2C	Spot light controller	0-1000mA	6W	3W	2
LS-3ACC1000-4C	Spot light controller	0-1000mA	12W	3W	4
LS-3ACC1500-2C	Spot light controller	0-1500mA	10W	5W	2
LS-3ACC1500-4C	Spot light controller	0-1500mA	20W	5W	2
LS-3ACC2500-2C	Spot light controller	0-2500mA	20W	10W	2
LS-3ACC12400-2	Structure light controller	0-400mA	10W	5W	2
LS-3ACC12700-1	Structure light controller	0-700mA	8.5W	8.5W	1

More values per model (Control) are on each product page.

Dimensions



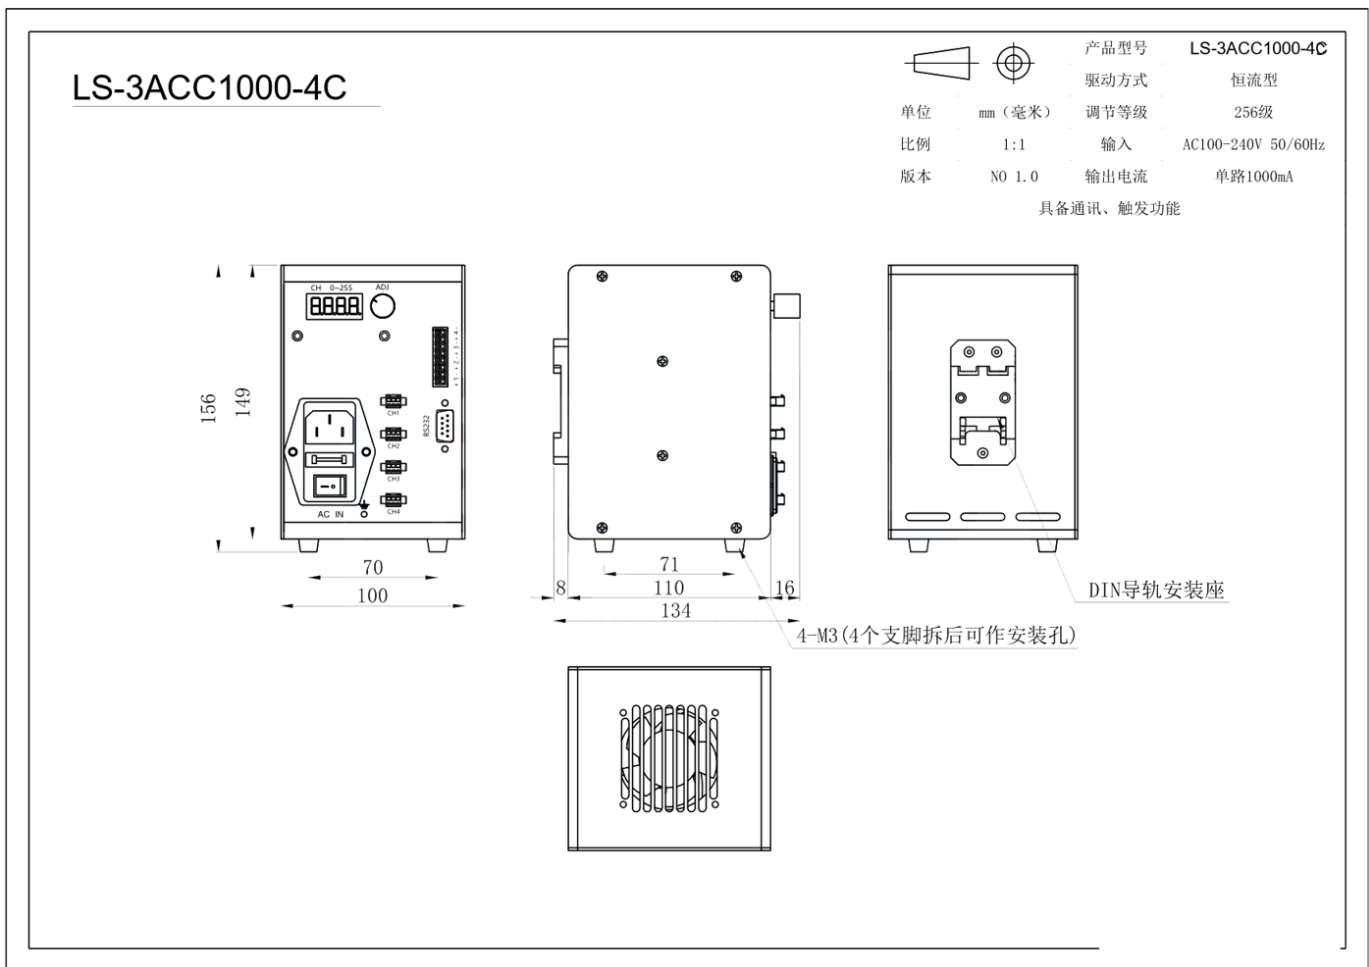


LS-3ACC1000-4C




单位 mm (毫米)
比例 1:1
版本 NO 1.0

产品型号	LS-3ACC1000-4C
驱动方式	恒流型
调节等级	256级
输入	AC100-240V 50/60Hz
输出电流	单路1000mA
具备通讯、触发功能	

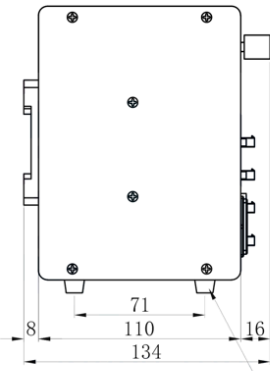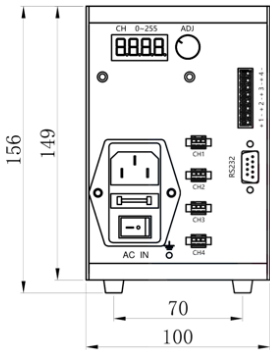




DIN导轨安装座

4-M3 (4个支脚拆后可作安装孔)




LS-3ACC350-2C

			产品型号	LS-3ACC350-2C
			驱动方式	恒流型
单位	mm (毫米)		调节等级	256级
比例	1:1		输入	AC100-240V 50/60Hz
版本	NO 1.0		输出电流	单路350mA
具备通讯、触发功能				

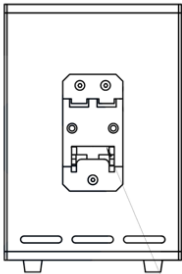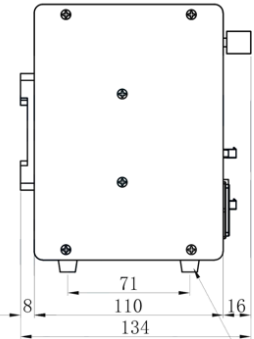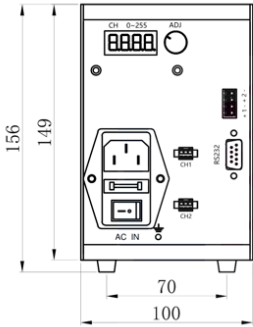

DIN导轨安装座

4-M3 (4个支脚拆后可作安装孔)





驱动方式 恒流型

调节等级 256级

单位 mm (毫米)

调节等级 256级



比例 1:1

输入 AC100-240V 50/60Hz

版本 NO 1.0

输出电流 单路350mA

具备通讯、触发功能

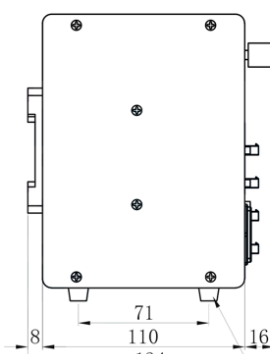

DIN导轨安装座

4-M3(4个支脚拆后可作安装孔)

