

Right-angle coaxial light (3COXR)

LS-3COXR series · Coaxial lights · 7 models

Compact,space saving. 90° between ray and CCD camera, compact structure.

Features

- Compact,space saving
- 90° between ray and CCD camera, compact structure



Applications

- The surface scratch of bright and clear object, food packaging

Common specifications

Note	UV & IR light can be customized as required.
Voltage	24V


Models

Model	Model as printed	Dimension	Power
LS-3COXR20 colours: R, B, G, W	LS-3COXR20-R/BGW	L54xW30xH30(mm)	1.5W/1.5W
LS-3COXR30 colours: R, B, G, W	LS-3COXR30-R/BGW	L64xW40xH40(mm)	2.9W/4.4W
LS-3COXR40 colours: R, B, G, W	LS-3COXR40-R/BGW	L74xW50xH50(mm)	4.4W/4.4W
LS-3COXR50 colours: R, B, G, W	LS-3COXR50-R/BGW	L84xW60xH60(mm)	6.5W/7.2W
LS-3COXR60 colours: R, B, G, W	LS-3COXR60-R/BGW	L94xW70xH70(mm)	8.7W/10.8W
LS-3COXR80 colours: R, B, G, W	LS-3COXR80-R/BGW	L114xW92xH92(mm)	15.2W/21.6W
LS-3COXR100 colours: R, B, G, W	LS-3COXR100-R/BGW	L134xW112xH112(mm)	26.0W/32.4W

Dimensions


LS-3COXR50

		产品型号	LS-3COXR50
		LED发光色	R(红)/W(白)
单位	mm (毫米)	输入电压	DC 24V(max)
比例	1:1	消耗功率	/
版本	NO 1.1	电缆极性	1:+、2:NC、3:-

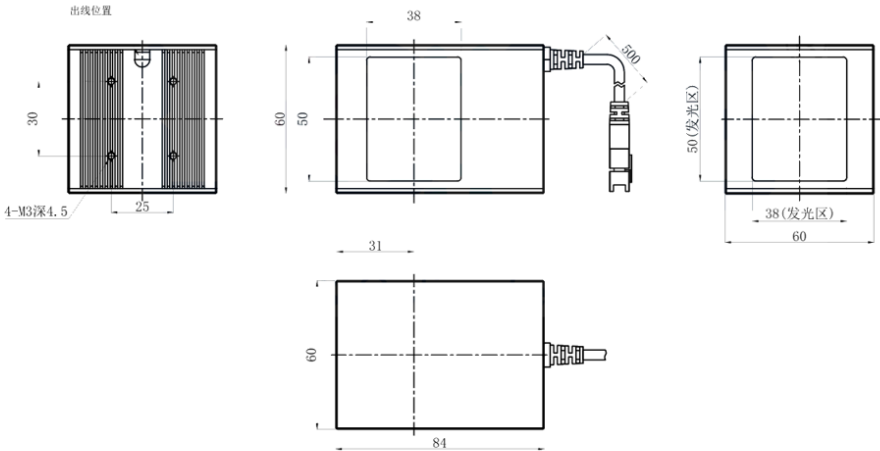

LS-3COXR50

		产品型号	LS-3COXR50
单位	mm (毫米)	LED发光色	R (红) / W (白)
比例	1:1	输入电压	DC 24V (max)
版本	NO 1.1	消耗功率	/
		电缆极性	1:+, 2:NC, 3:-

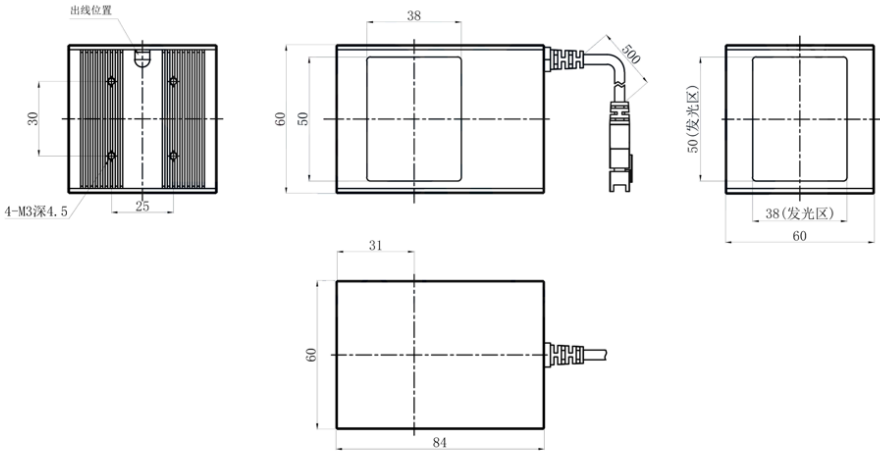

LS-3COXR20

		产品型号	LS-3COXR20
单位	mm (毫米)	LED发光色	R(红)/W(白)
比例	1:1	输入电压	DC 24V(max)
版本	NO 1.1	消耗功率	/
		电缆极性	1:+, 2:NC, 3:-

