


Ring back light (3FTR)

LS-3FTR series · Backlights · 15 models

High-density LED distribute to the bottom of the light. High uniformity, high luminance. Diverse dimension for reference, used to various applications.

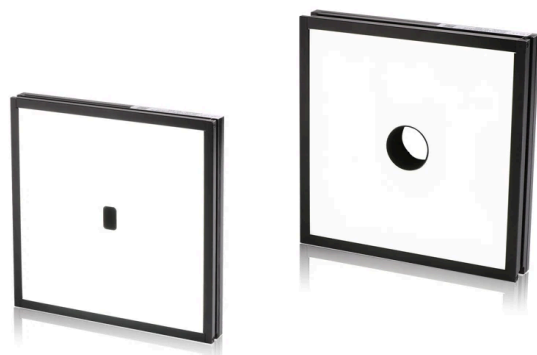

Features

- High-density LED distribute to the bottom of the light
- High uniformity, high luminance
- Diverse dimension for reference, used to various applications
- Emitting area and the center hole can be customized

Applications

- Boundary dimension measurement
- Damaged edge inspection
- Transparency impurity inspection
- Oral liquid level height inspection

Common specifications

Note	UV & IR light can be customized as required.
Voltage	24V

Models

Model	Model as printed	Dimension	Power
LS-3FTR100100-D34 colours: R, B, G, W	LS-3FTR100100-D34-R/BGW	L117xW117xH27(mm)	6.4W/8.5W
LS-3FTR110110-D40 colours: R, B, G, W	LS-3FTR110110-D40-R/BGW	L127W127xH23(mm)	9.8W/12.3W

LS-3FTR150100-D40 colours: R, B, G, W	LS-3FTR150100-D40-R/BGW	L167xW117xH25(mm)	11.9W/14.8W
LS-3FTR150150-D30 colours: R, B, G, W	LS-3FTR150150-D30-R/BGW	L167xW167xH27(mm)	15.9W/20.1W
LS-3FTR200200-D50 colours: R, B, G, W	LS-3FTR200200-D50-R/BGW	L217xW217xH27(mm)	25.4W/31.7W
LS-3FTR220220-D60 colours: R, B, G, W	LS-3FTR220220-D60-R/BGW	L237xW237xH27(mm)	33.9W/42.2W
LS-3FTR300220-D45 colours: R, B, G, W	LS-3FTR300220-D45-R/BGW	L317xW217xH25(mm)	52.6W/65.9W
LS-3FTR300300-D50 colours: R, B, G, W	LS-3FTR300300-D50-R/BGW	L317xW317xH27(mm)	58.1W/73.4W
LS-3FTR350300-D80 colours: R, B, G, W	LS-3FTR350300-D80-R/BGW	L367W317xH27(mm)	57.1W/70.8W
LS-3FTR400300-D50 colours: R, B, G, W	LS-3FTR400300-D50-R/BGW	L417xW317xH27(mm)	65.5W/82.4W
LS-3FTR400400-D50 colours: R, B, G, W	LS-3FTR400400-D50-R/BGW	L417xW417xH30(mm)	82.6W/103.5W
LS-3FTR500400-D65 colours: R, B, G, W	LS-3FTR500400-D65-R/BGW	L517xW417xH30(mm)	126.8W/158.4W
LS-3FTR500500-D60 colours: R, B, G, W	LS-3FTR500500-D60-R/BGW	L517xW517xH31(mm)	82.1W/102.3W
LS-3FTR600600-D50 colours: R, B, G, W	LS-3FTR600600-D50-R/BGW	L617xW617xH51(mm)	184.4W/231.9W
LS-3FTR1000700-D65 colours: R, B, G, W	LS-3FTR1000700-D65-R/BGW	L1017xW717xH51(mm)	363.6W/390.0W


Dimensions

LS-3FTR300300-D50



单位 mm (毫米)
比例 1:1
版本 NO 1.2

产品型号 **LS-3FTR300300-D50**
LED发光色 R (红) / W (白)
输入电压 DC 24V (max)
消耗功率 /
电缆极性 1: +, 2: -, 3: NC, 4: NC

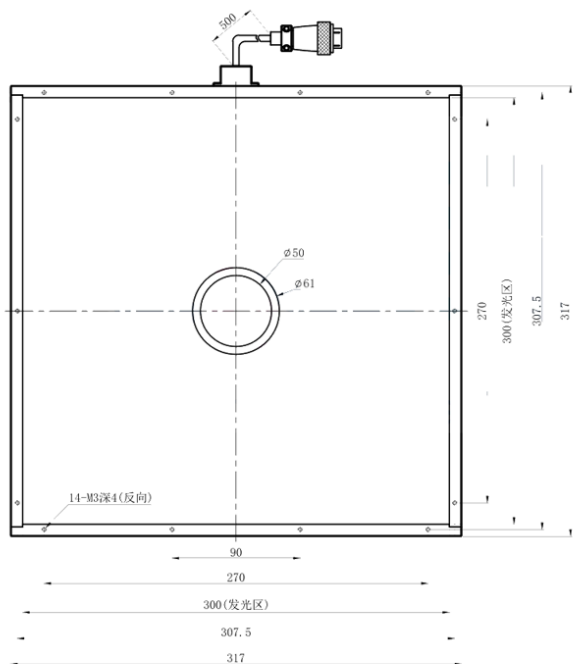

LED发光色 R(红)/W(白)

输入电压 DC 24V(max)

消耗功率 /


电缆极性 1: +、2: -、3: NC、4: NC



单位 mm (毫米)

比例

版本

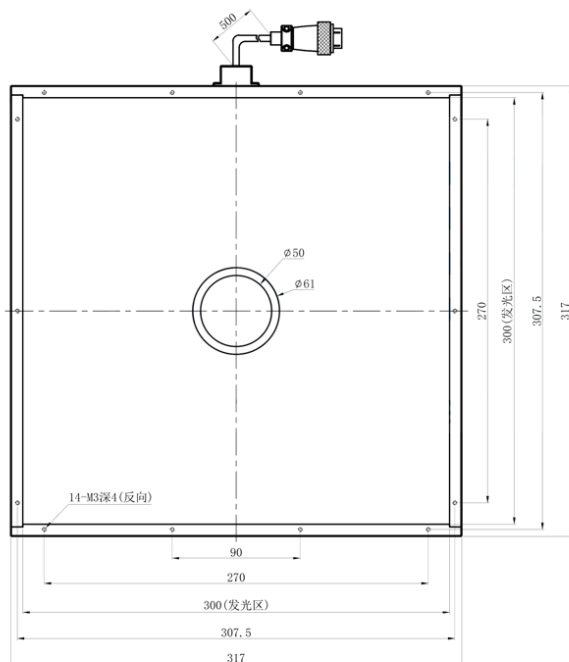


LS-3FTR100100-D34



单位 mm (毫米)
比例 1:1
版本 NO 1.0

产品型号	LS-3FTR100100-D34
LED发光色	R(红)/W(白)
输入电压	DC 24V(max)
消耗功率	/
电缆极性	1:+, 2:NC, 3:-

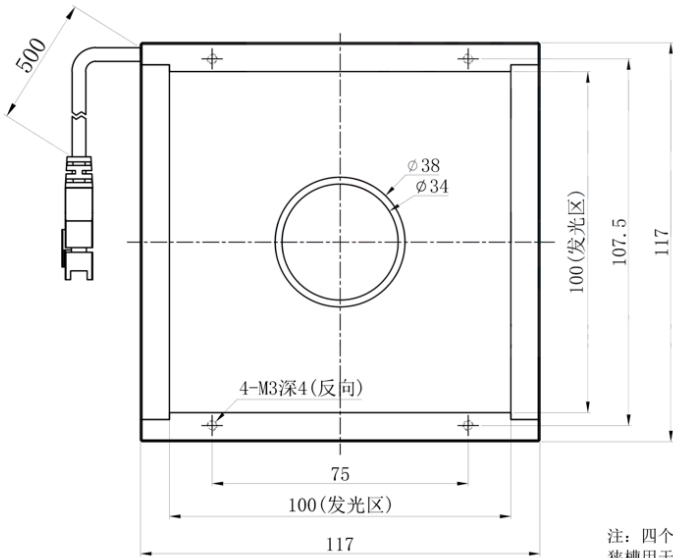


注：四个侧面均有一个狭槽用于放置20型滑块螺母。

NO 1.0

电缆极性 1: +、2: NC、3: -

1. $\frac{1}{2}$
2. $\frac{1}{3}$
3. $\frac{1}{4}$

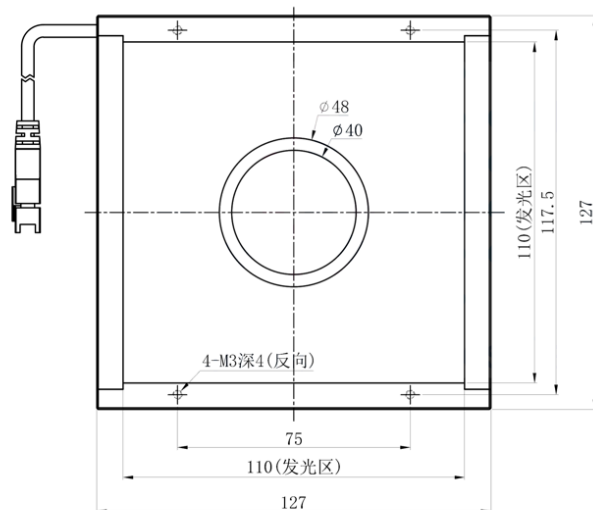

Performance

