

Multi-angle line scan light (3LINM)

LS-3LINM series · Line scan lights · 8 models

Scratch inspected from multiple angle, multiple direction light path have strong direction, obvious contrast between scratch and background. Tunnel line scan light have good uniformity, so that the defect homogenization, to make the contrast between scratch and background is not obvious.



Features

- Reflected from different angle, luminance can reach 1,300,000LUX
- BConcentrated light, high uniformity
- Compact structure

Applications

- Scratch, bubble, stain, fingerprint in the mobile screen surface

Common specifications


Cooling	Fan cooling
Note	UV & IR light can be customized as required.

Models

Model	Model as printed	Dimension	Voltage	Power
LS-3LINM100 colours: R, B, G, W	LS-3LINM100-R/BGW	L116xW313xH82(mm)	24V	96W
LS-3LINM200 colours: R, B, G, W	LS-3LINM200-R/BGW	L216xW313xH82(mm)	24V	192W
LS-3LINM300 colours: R, B, G, W	LS-3LINM300-R/BGW	L316xW313xH82(mm)	24V	288W
LS-3LINM400 colours: R, B, G, W	LS-3LINM400-R/BGW	L416xW313xH82(mm)	24V	384W


LS-3LINM500 colours: R, B, G, W	LS-3LINM500-R/BGW	L516xW313xH82(mm)	48V	576W
LS-3LINM600 colours: R, B, G, W	LS-3LINM600-R/BGW	L616xW313xH82(mm)	48V	768W
LS-3LINM700 colours: R, B, G, W	LS-3LINM700-R/BGW	L716xW313xH82(mm)	48V	864W
LS-3LINM800 colours: R, B, G, W	LS-3LINM800-R/BGW	L816xW313xH82(mm)	48V	864W

Dimensions

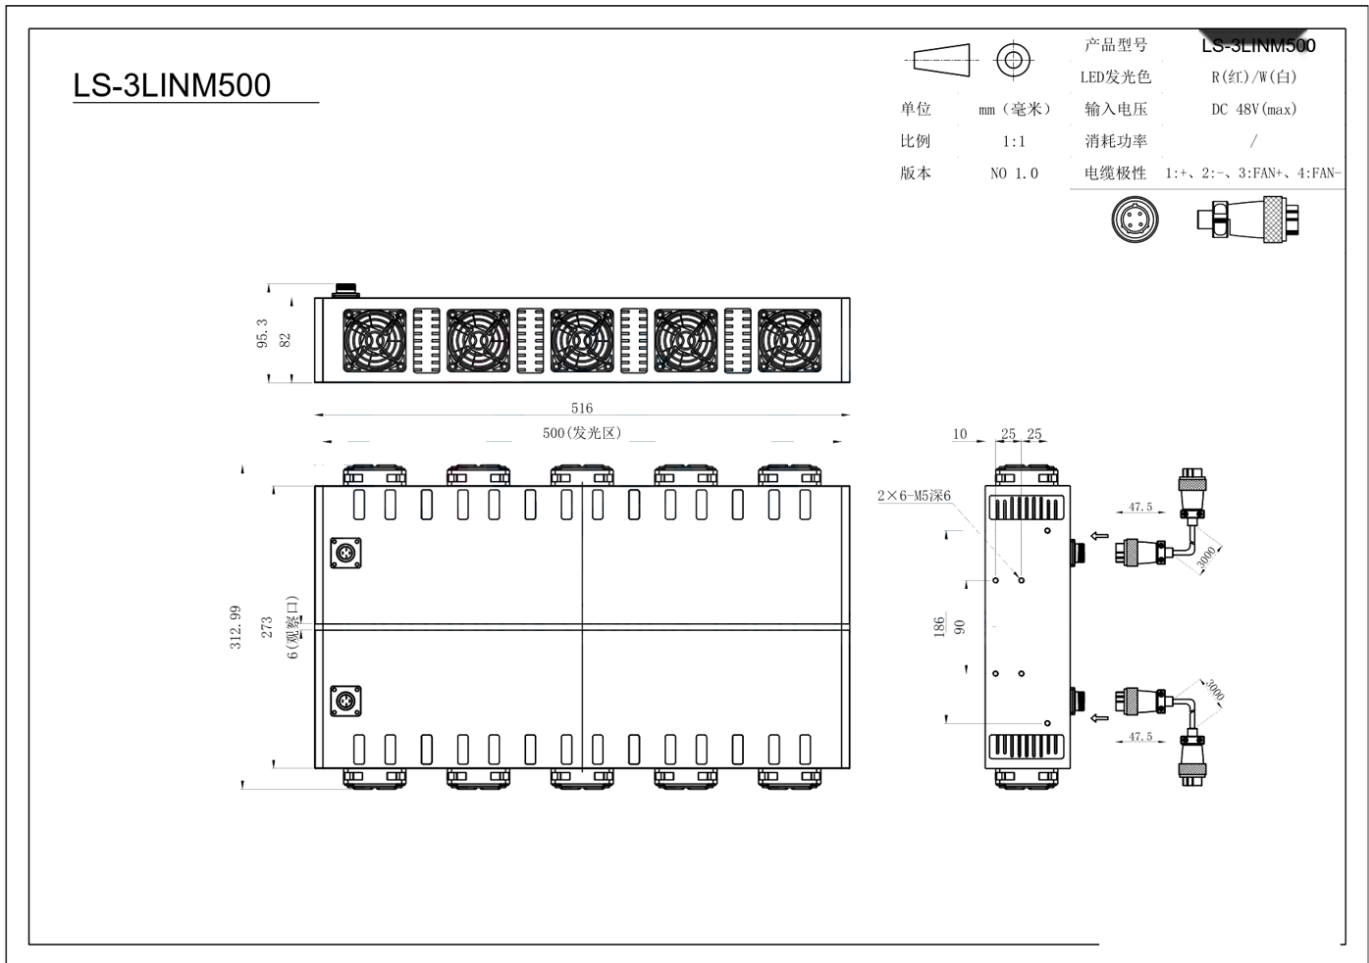


版本 NO 1.0

电缆极性 1: +、2: -、3: FAN+、4: FAN-

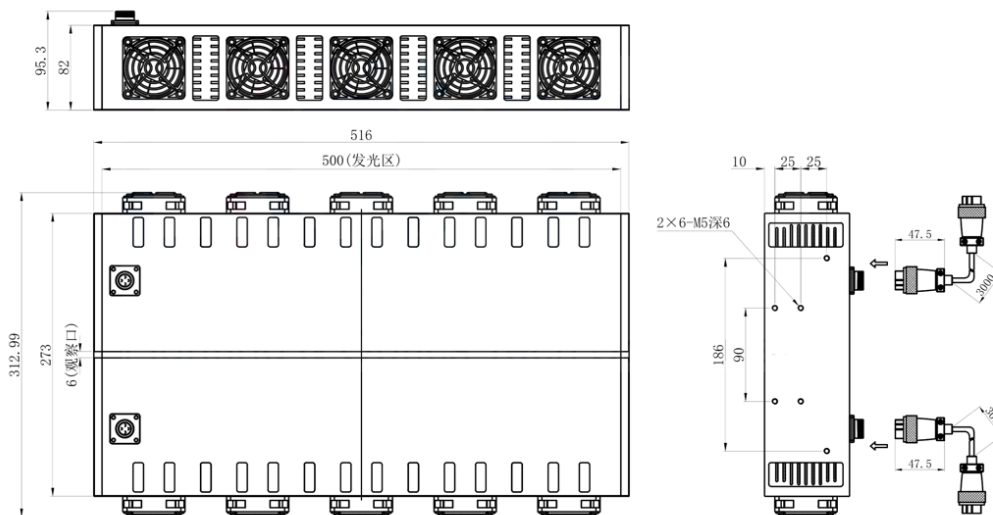


LS-3LINM100

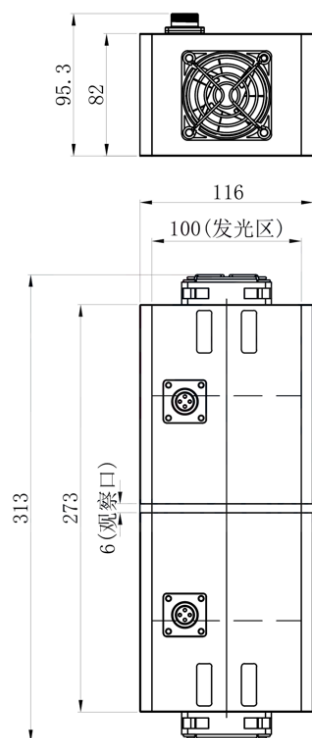


单位 mm (毫米)
比例 1:1
版本 NO 1.0

产品型号 **LS-3LINM100**
LED发光色 R(红)/W(白)
输入电压 DC 24V(max)
消耗功率 /
电缆极性 1:+, 2:-, 3:FAN+, 4:FAN-



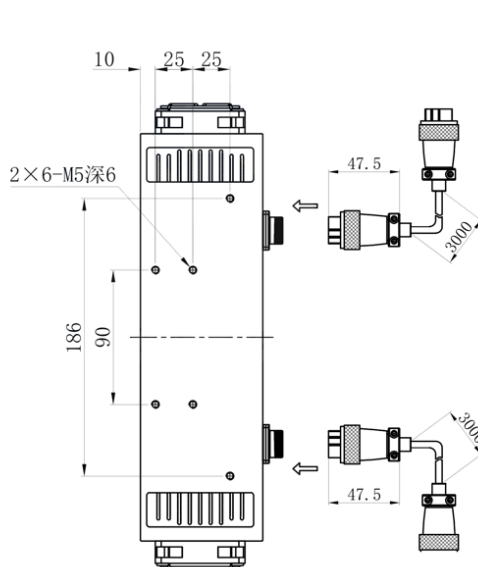


版本 NO 1.0

电缆极性 1: +、2: -、3: FAN+、4: FAN-

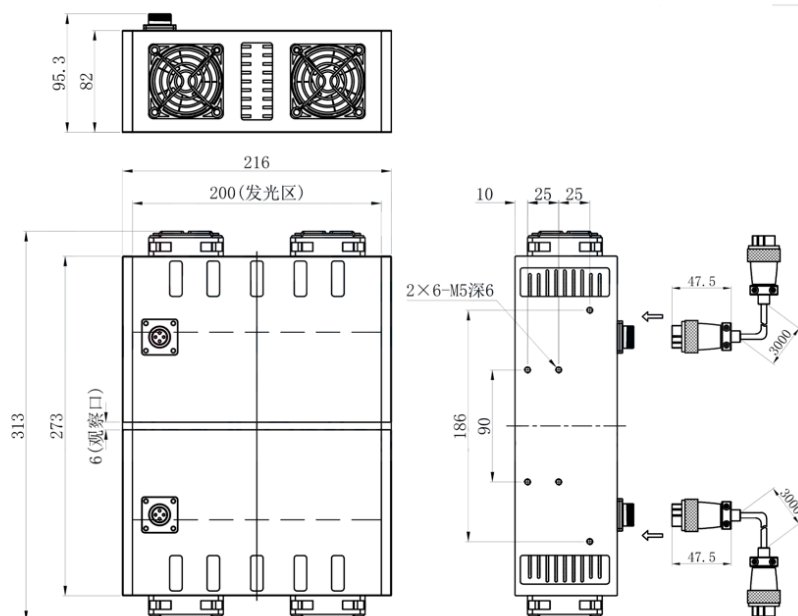

Performance

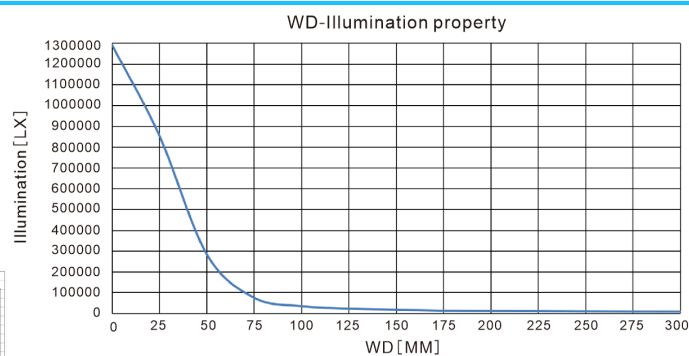

*Above diagram only for reference.