

High luminance bar light (4BR)

LS-4BR series · Bar lights · 44 models

The shell is designed by aluminum alloy integrated molding; special heat transferring design; multi-option illumination angles and installation way; High-density LED arrays; can be used for a wide range of applications.



Features

- Small angle LED array design, high luminance
- Processed by high precision mould, shorten the difference between different batch. high heat transmitting performance
- Multiple installation method, easy to install
- Different transmittance diffuser plate optional

Applications

- Big size LCD panel defect inspection
- Metal surface defect inspection
- Printing character defect inspection
- Connector pin flatness inspection

Common specifications

Note	UV & IR light can be customiz
------	-------------------------------

Voltage 24V

Models

Model	Model as printed	Dimension	Power
LS-4BR3016 colours: R, B, G, W	LS-4BR3016-R/BGW	L42xW22xH26(mm)	0.8W/1.1W
LS-4BR6016 colours: R, B, G, W	LS-4BR6016-R/BGW	L72xW22xH26(mm)	1.5W/2.2W
LS-4BR9016 colours: R, B, G, W	LS-4BR9016-R/BGW	L102xW22xH26(mm)	2.2W/3.3W
LS-4BR12016 colours: R, B, G, W	LS-4BR12016-R/BGW	L132xW22xH26(mm)	2.9W/4.4W
LS-4BR15016 colours: R, B, G, W	LS-4BR15016-R/BGW	L162xW22xH26(mm)	3.6W/5.4W
LS-4BR18016 colours: R, B, G, W	LS-4BR18016-R/BGW	L192xW22xH26(mm)	4.4W/6.5W
LS-4BR21016 colours: R, B, G, W	LS-4BR21016-R/BGW	L222xW22xH26(mm)	5.1W/7.6W
LS-4BR24016 colours: R, B, G, W	LS-4BR24016-R/BGW	L252xW22xH26(mm)	5.8W/8.7W
LS-4BR27016 colours: R, B, G, W	LS-4BR27016-R/BGW	L282xW22xH26(mm)	6.5W/9.8W
LS-4BR30016 colours: R, B, G, W	LS-4BR30016-R/BGW	L312xW22xH26(mm)	7.2W/10.8W
LS-4BR33016 colours: R, B, G, W	LS-4BR33016-R/BGW	L342xW22xH26(mm)	8.0W/11.9W
LS-4BR36016 colours: R, B, G, W	LS-4BR36016-R/BGW	L372xW22xH26(mm)	8.7W/13.0W
LS-4BR39016 colours: R, B, G, W	LS-4BR39016-R/BGW	L402xW22xH26(mm)	9.4W/14.1W
LS-4BR42016 colours: R, B, G, W	LS-4BR42016-R/BGW	L432xW22xH26(mm)	10.1W/15.2W
LS-4BR45016 colours: R, B, G, W	LS-4BR45016-R/BGW	L462xW22xH26(mm)	10.8W/16.2W
LS-4BR48016 colours: R, B, G, W	LS-4BR48016-R/BGW	L492xW22xH26(mm)	11.6W/17.3W
LS-4BR51016 colours: R, B, G, W	LS-4BR51016-R/BGW	L522xW22xH26(mm)	12.3W/18.4W
LS-4BR2530 colours: R, B, G, W	LS-4BR2530-R/BGW	L37xW36xH26(mm)	1.1W/1.8W
LS-4BR5030 colours: R, B, G, W	LS-4BR5030-R/BGW	L62xW36xH26(mm)	2.2W/3.6W
LS-4BR7530 colours: R, B, G, W	LS-4BR7530-R/BGW	L87xW36xH26(mm)	3.3W/5.4W
LS-4BR10030 colours: R, B, G, W	LS-4BR10030-R/BGW	L112xW36xH26(mm)	4.4W/7.2W
LS-4BR12530 colours: R, B, G, W	LS-4BR12530-R/BGW	L137xW36xH26(mm)	5.4W/9.0W
LS-4BR15030 colours: R, B, G, W	LS-4BR15030-R/BGW	L162xW36xH26(mm)	6.5W/10.8W

LS-4BR17530 colours: R, B, G, W	LS-4BR17530-R/BGW	L187xW36xH26(mm)	7.6W/12.6W
LS-4BR20030 colours: R, B, G, W	LS-4BR20030-R/BGW	L212xW36xH26(mm)	8.7W/14.4W
LS-4BR22530 colours: R, B, G, W	LS-4BR22530-R/BGW	L237xW36xH26(mm)	9.8W/16.2W
LS-4BR25030 colours: R, B, G, W	LS-4BR25030-R/BGW	L262xW36xH26(mm)	10.8W/18.0W
LS-4BR27530 colours: R, B, G, W	LS-4BR27530-R/BGW	L287xW36xH26(mm)	11.9W/19.8W
LS-4BR30030 colours: R, B, G, W	LS-4BR30030-R/BGW	L312xW36xH26(mm)	13.0W/21.6W
LS-4BR32530 colours: R, B, G, W	LS-4BR32530-R/BGW	L337xW36xH26(mm)	14.1W/23.4W
LS-4BR35030 colours: R, B, G, W	LS-4BR35030-R/BGW	L362xW36xH26(mm)	15.2W/25.2W
LS-4BR37530 colours: R, B, G, W	LS-4BR37530-R/BGW	L387xW36xH26(mm)	16.2W/27.0W
LS-4BR40030 colours: R, B, G, W	LS-4BR40030-R/BGW	L412xW36xH26(mm)	17.3W/28.8W
LS-4BR42530 colours: R, B, G, W	LS-4BR42530-R/BGW	L437xW36xH26(mm)	18.4W/30.6W
LS-4BR45030 colours: R, B, G, W	LS-4BR45030-R/BGW	L462xW36xH26(mm)	19.5W/32.4W
LS-4BR47530 colours: R, B, G, W	LS-4BR47530-R/BGW	L487xW36xH26(mm)	20.6W/34.2W
LS-4BR50030 colours: R, B, G, W	LS-4BR50030-R/BGW	L512xW36xH26(mm)	21.6W/36.0W
LS-4BR3830 colours: R, B, G, W	LS-4BR3830-R/BGW	L50xW36xH26(mm)	1.5W/2.9W
LS-4BR60030 colours: R, B, G, W	LS-4BR60030-R/BGW	L612xW36xH26(mm)	26.0W/43.2W
LS-4BR80030 colours: R, B, G, W	LS-4BR80030-R/BGW	L812xW36xH26(mm)	34.6W/57.6W
LS-4BR90030 colours: R, B, G, W	LS-4BR90030-R/BGW	L912xW36xH26(mm)	38.9W/64.8W
LS-4BR100030 colours: R, B, G, W	LS-4BR100030-R/BGW	L1012xW36xH26(mm)	43.2W/72.0W
LS-4BR120030 colours: R, B, G, W	LS-4BR120030-R/BGW	L1212xW36xH26(mm)	51.9W/86.4W
LS-4BR180030 colours: R, B, G, W	LS-4BR180030-R/BGW	L1812xW36xH26(mm)	77.8W/129.6W




Dimensions

LS-4BR15030



单位 mm (毫米)
比例 1:1
版本 NO 1.0

产品型号 **LS-4BR15030**
LED发光色 R(红)/W(白)
输入电压 DC 24V(max)
消耗功率 /
电缆极性 1:+、2:NC、3:-



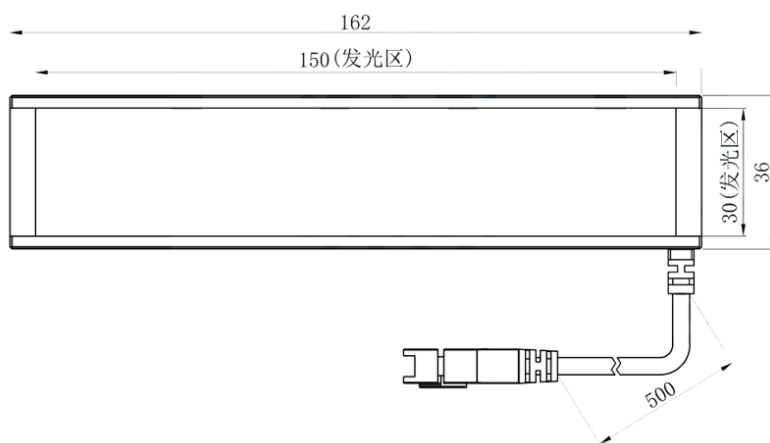


LS-4BR15030



单位 mm (毫米)
比例 1:1
版本 NO 1.0

产品型号 **LS-4BR15030**
LED发光色 R(红)/W(白)
输入电压 DC 24V(max)
消耗功率 /
电缆极性 1:+、2:NC、3:-

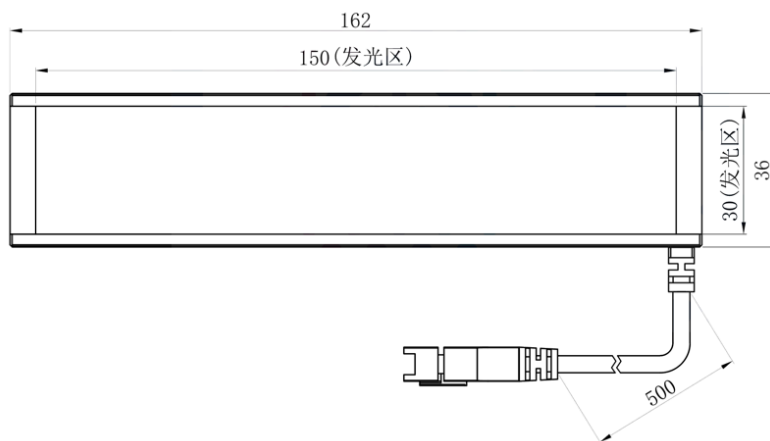


LS-4BR18016



单位 mm (毫米)
比例 1:1
版本 NO 1.0

产品型号 **LS-4BR18016**
LED发光色 R(红)/W(白)
输入电压 DC 24V(max)
消耗功率 /
电缆极性 1:+、2:NC、3:-

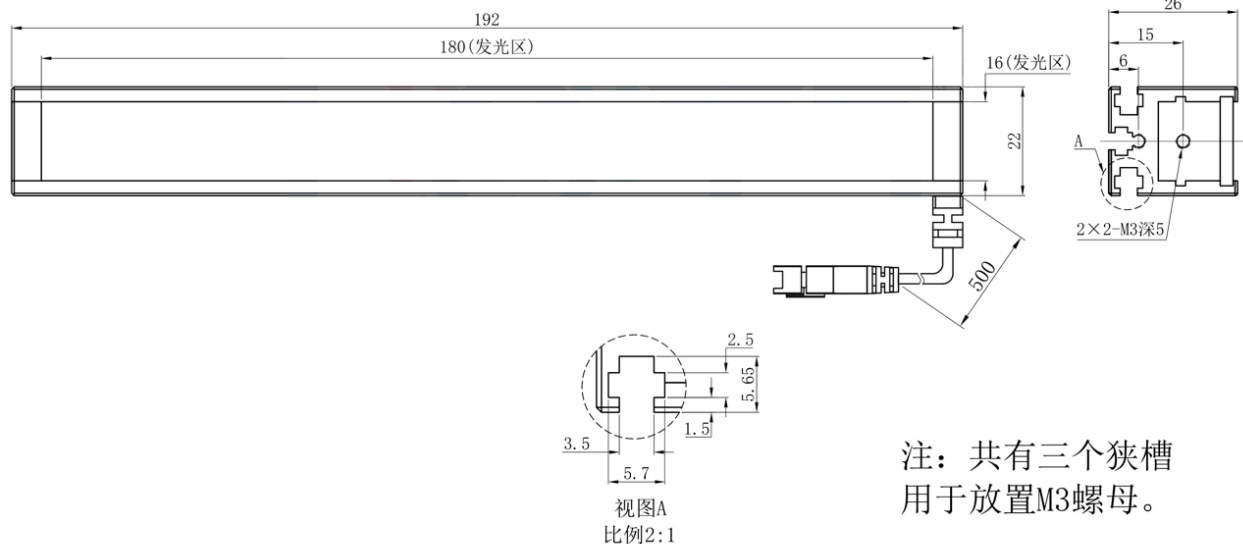

LS-4BR7530



产品型号 **LS-4BR7530**

LED发光色 R(红)/W(白)

单位 mm(毫米)




输入电压 DC 24V(max)

比例 1:1

消耗功率 /

版本 NO 1.0

电缆极性 1:+、2:NC、3:-

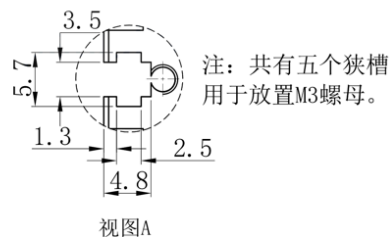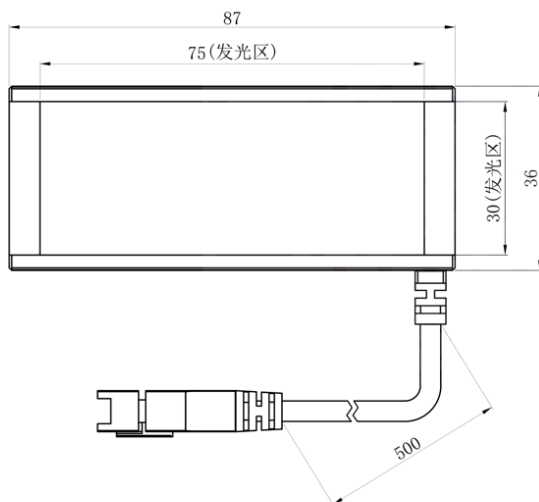

Performance

