

High power bar light (4BRH)

LS-4BRH series · Bar lights · 12 models


Adopted to high power LED design, the luminance is 2-3 times than original. Adapted to the environment where highlight is needed. Easy to install, good heat-dissipation.

Features

- High power LED used, lighting to long working distance, high luminance
- Multiple installation method, easy to install
- One-piece aluminium alloy design, high heat transmitting performance

Applications

- Big size LCD panel defect inspection
- Metal surface defect inspection
- Printing character defect inspection
- Connector pin flatness inspection

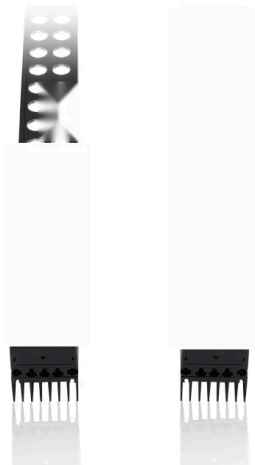

Common specifications

Note	UV & IR light can be customized as required.
General lens	W
Narrow angle lens	L-W
Voltage	24V

Models

Model	Model as printed	Dimension	Power
-------	------------------	-----------	-------

LS-4BRH15016 colours: R, B, G, W	LS-4BRH15016-R/BGW	L162xW22xH36(mm)	8.4W/8.4W
LS-4BRH30016 colours: R, B, G, W	LS-4BRH30016-R/BGW	L312xW22xH36(mm)	16.8W/16.8W
LS-4BRH45016 colours: R, B, G, W	LS-4BRH45016-R/BGW	L462xW22xH36(mm)	25.2W/25.2W
LS-4BRH60016 colours: R, B, G, W	LS-4BRH60016-R/BGW	L612xW22xH36(mm)	33.6W/33.6W
LS-4BRH75016 colours: R, B, G, W	LS-4BRH75016-R/BGW	L762xW22xH36(mm)	42.0W/42.0W
LS-4BRH90016 colours: R, B, G, W	LS-4BRH90016-R/BGW	L912xW22xH36(mm)	50.4W/50.4W
LS-4BRH15030 colours: R, B, G, W	LS-4BRH15030-R/BGW	L162xW36xH46(mm)	14.4W/14.4W
LS-4BRH30030 colours: R, B, G, W	LS-4BRH30030-R/BGW	L312xW36xH46(mm)	28.8W/28.8W
LS-4BRH45030 colours: R, B, G, W	LS-4BRH45030-R/BGW	L462xW36xH46(mm)	43.2W/43.2W
LS-4BRH60030 colours: R, B, G, W	LS-4BRH60030-R/BGW	L612xW36xH46(mm)	57.6W/64.8W
LS-4BRH75030 colours: R, B, G, W	LS-4BRH75030-R/BGW	L762xW36xH46(mm)	72.0W/72.0W
LS-4BRH90030 colours: R, B, G, W	LS-4BRH90030-R/BGW	L912xW36xH46(mm)	86.4W/86.4W


Dimensions

LS-4BRH15030



单位 mm (毫米)
比例 1:1
版本 NO 1.2

产品型号 **LS-4BRH15030**
LED发光色 R(红)/W(白)
输入电压 DC 24V (max)
消耗功率 /
电缆极性 1:+、2:NC、3:-

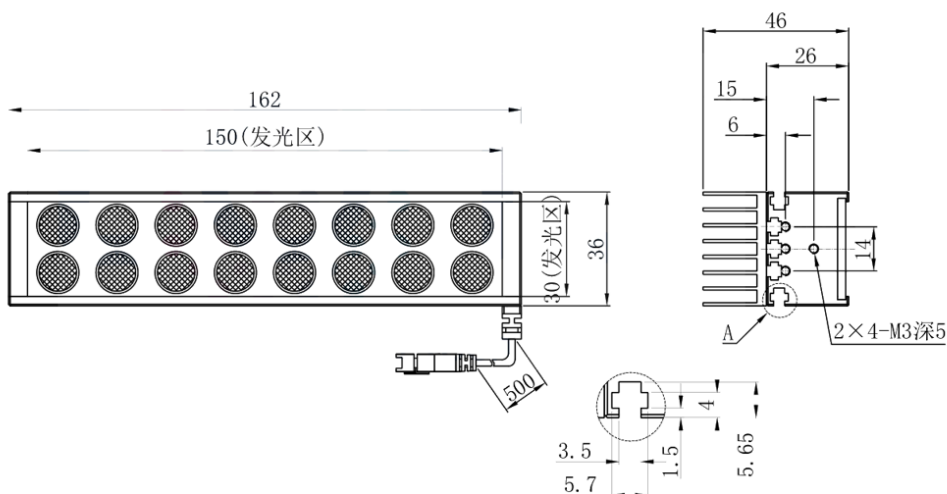

视图A (两边对称)
2:1

注: 共有两个狭槽用于放置M3螺母。

LS-4BRH15030



单位

mm (毫米)

比例

1:1

版本

NO 1.2

产品型号

LS-4BRH15030

LED发光色

R(红)/W(白)

输入电压





DC 24V (max)

消耗功率

/

电缆极性

1:+, 2:NC, 3:-

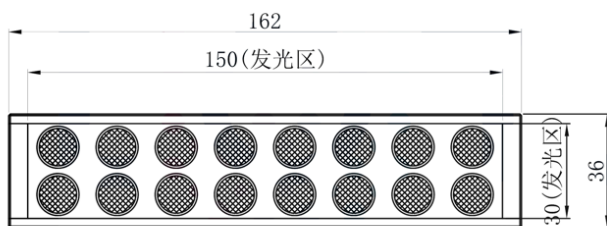

视图A (两边对称)
2:1




注: 共有两个狭槽用于放置M3螺母。

LS-4BRH15016



单位 mm (毫米)
比例 1:1
版本 NO 1.3


产品型号	LS-4BRH15016
LED发光色	R (红) / W (白)
输入电压	DC 24V (max)
消耗功率	/
电缆极性	1: +, 2: NC, 3: -

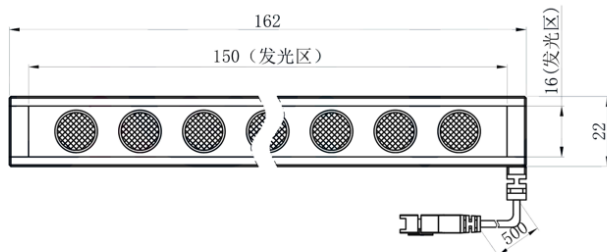

注：共有两个个狭槽
用于放置M3螺母。

LS-4BRH75016

		产品型号	LS-4BRH75016
		LED发光色	R(红)/W(白)
单位	mm (毫米)	输入电压	DC 24V (max)
比例	1:1	消耗功率	/
版本	NO 1.0	电缆极性	1:+, 2:NC, 3:-

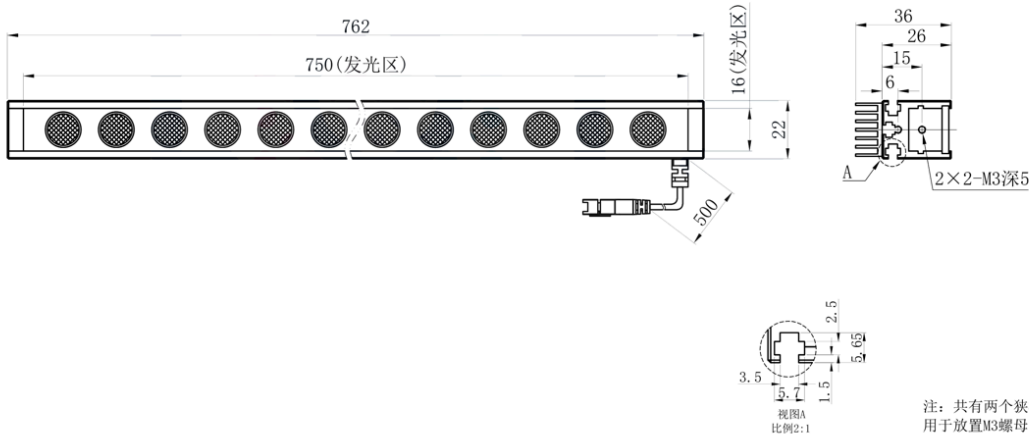

Performance

