


Square back light with hole (4FTB)

LS-4FTB series · Backlights · 6 models

High-density LED distribute to the bottom of the light. High uniformity, high luminance. Diverse dimension for reference, used to various applications.

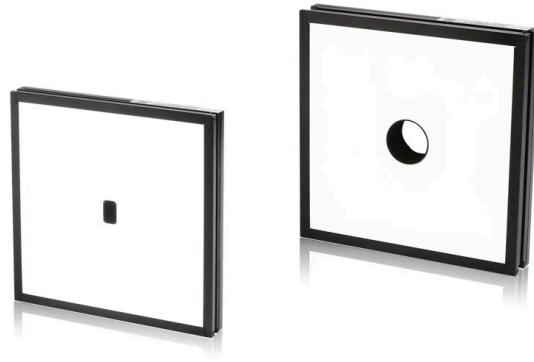

Features

- High-density LED distribute to the bottom of the light
- High uniformity, high luminance
- Diverse dimension for reference, used to various applications
- Emitting area and the center hole can be customized

Applications

- Boundary dimension measurement
- Damaged edge inspection
- Transparency impurity inspection
- Oral liquid level height inspection

Common specifications


Note	UV & IR light can be customized as required.
Voltage	24V

Models

Model	Model as printed	Dimension	Power
LS-4FTB9090 colours: R, B, G, W	LS-4FTB9090-R/BGW	L104xW104xH21(mm)	5.9W/7.4W
LS-4FTB110110 colours: R, B, G, W	LS-4FTB110110-R/BGW	L146xW124xH21(mm)	6.4W/8.0W

LS-4FTB140140 colours: R, B, G, W	LS-4FTB140140-R/BGW	L154xW154xH21(mm)	13.8W/17.5W
LS-4FTB200100 colours: R, B, G, W	LS-4FTB200100-R/BGW	L214xW114xH21(mm)	12.2W/15.4W
LS-4FTB200180 colours: R, B, G, W	LS-4FTB200180-R/BGW	L236xW194xH21mm)	23.3W/29.1W
LS-4FTB236186 colours: R, B, G, W	LS-4FTB236186-R/BGW	L250xW200xH21(mm)	27.5W/35.4W

Dimensions

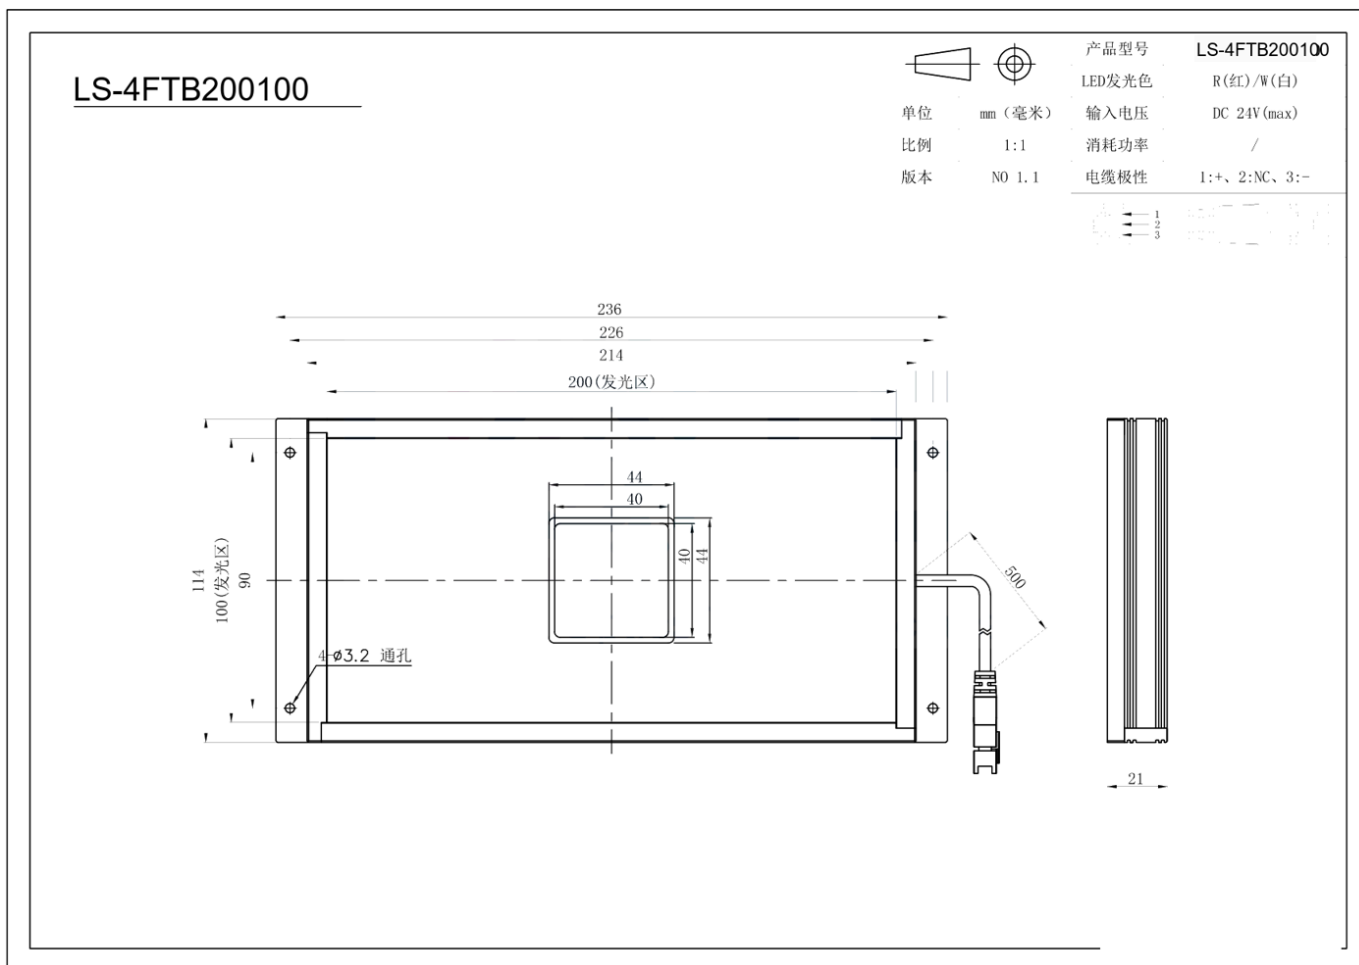


LS-4FTB200100




单位 mm (毫米)
比例 1:1
版本 NO 1.1

产品型号 **LS-4FTB200100**
LED发光色 R(红)/W(白)
输入电压 DC 24V(max)
消耗功率 /
电缆极性 1:+、2:NC、3:-

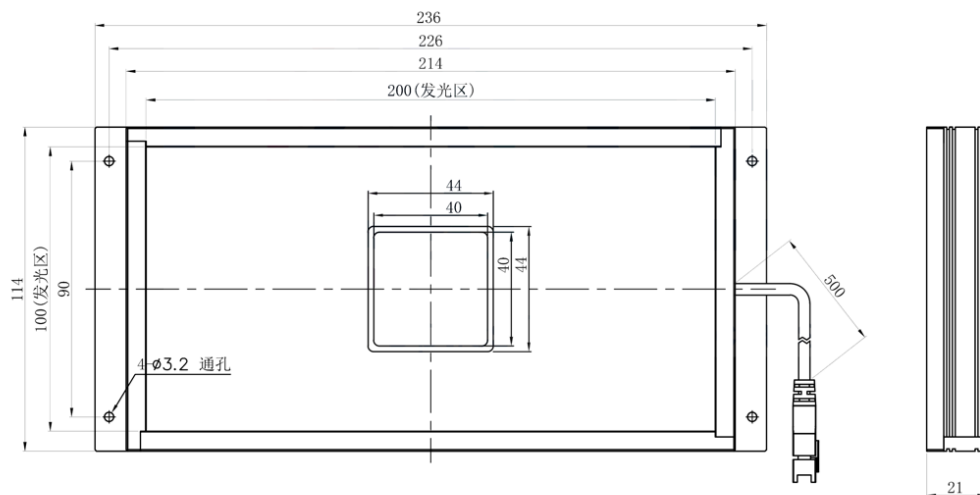


LS-4FTB9090



单位 mm (毫米)
比例 1:1
版本 NO 1.0

产品型号 **LS-4FTB9090**
LED发光色 R(红)/W(白)
输入电压 DC 24V(max)
消耗功率 /
电缆极性 1:+, 2:NC, 3:-

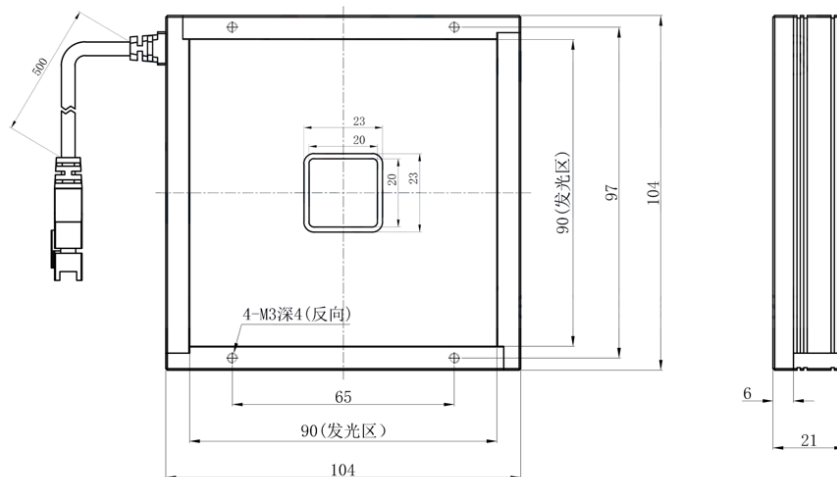


LS-4FTB110110






单位 mm (毫米)
比例 1:1
版本 NO 1.0

产品型号	LS-4FTB110110
LED发光色	R(红)/W(白)
输入电压	DC 24V(max)
消耗功率	/
电缆极性	1:+、2:NC、3:-

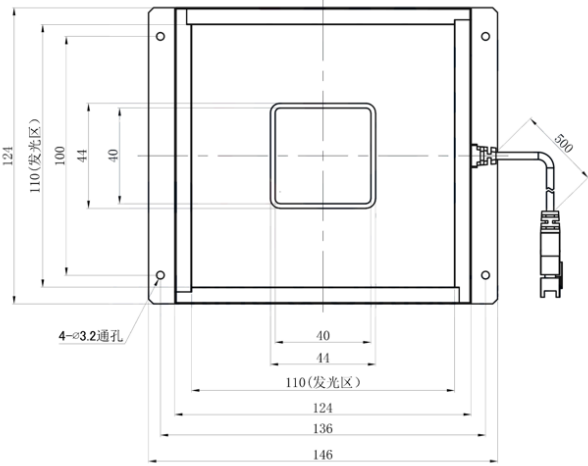

Performance



*Above diagram only for reference