


Ring back light (4FTR)

LS-4FTR series · Backlights · 10 models

High-density LED distribute to the bottom of the light. High uniformity, high luminance. Diverse dimension for reference, used to various applications.

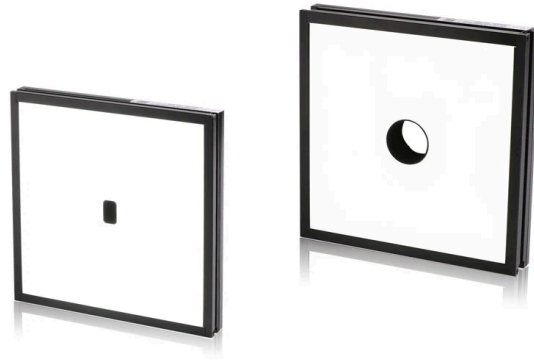

Features

- High-density LED distribute to the bottom of the light
- High uniformity, high luminance
- Diverse dimension for reference, used to various applications
- Emitting area and the center hole can be customized

Applications

- Boundary dimension measurement
- Damaged edge inspection
- Transparency impurity inspection
- Oral liquid level height inspection

Common specifications


Note	UV & IR light can be customized as required.
Voltage	24V

Models

Model	Model as printed	Dimension	Power
LS-4FTR120120-D30 colours: R, B, G, W	LS-4FTR120120-D30-R/BGW	L134xW134xH17(mm)	9.6W/12.2W
LS-4FTR141141-D35 colours: R, B, G, W	LS-4FTR141141-D35-R/BGW	L155xW155xH17(mm)	12.2W/15.4W

LS-4FTR150150-D30 colours: R, B, G, W	LS-4FTR150150-D30-R/BGW	L164xW164xH19(mm)	15.9W/20.6W
LS-4FTR170170-2D40 colours: R, B, G, W	LS-4FTR170170-2D40-R/BGW	L184xW184xH17(mm)	18.0W/22.2W
LS-4FTR180180-D40 colours: R, B, G, W	LS-4FTR180180-D40-R/BGW	L194xW194xH19(mm)	21.2W/26.4W
LS-4FTR200100-2D40 colours: R, B, G, W	LS-4FTR200100-2D40-R/BGW	L214xW114xH19(mm)	11.7W/14.8W
LS-4FTR200200-D50 colours: R, B, G, W	LS-4FTR200200-D50-R/BGW	L214xW214xH17(mm)	27.5W/34.4W
LS-4FTR250210-D60 colours: R, B, G, W	LS-4FTR250210-D60-R/BGW	L286xW224xH19(mm)	31.7W/46.0W
LS-4FTR300200-D40 colours: R, B, G, W	LS-4FTR300200-D40-R/BGW	L314xW214xH21(mm)	43.9W/55.0W
LS-4FTR400300-D50 colours: R, B, G, W	LS-4FTR400300-D50-R/BGW	L414xW314xH19(mm)	65.5W/82.4W

Dimensions

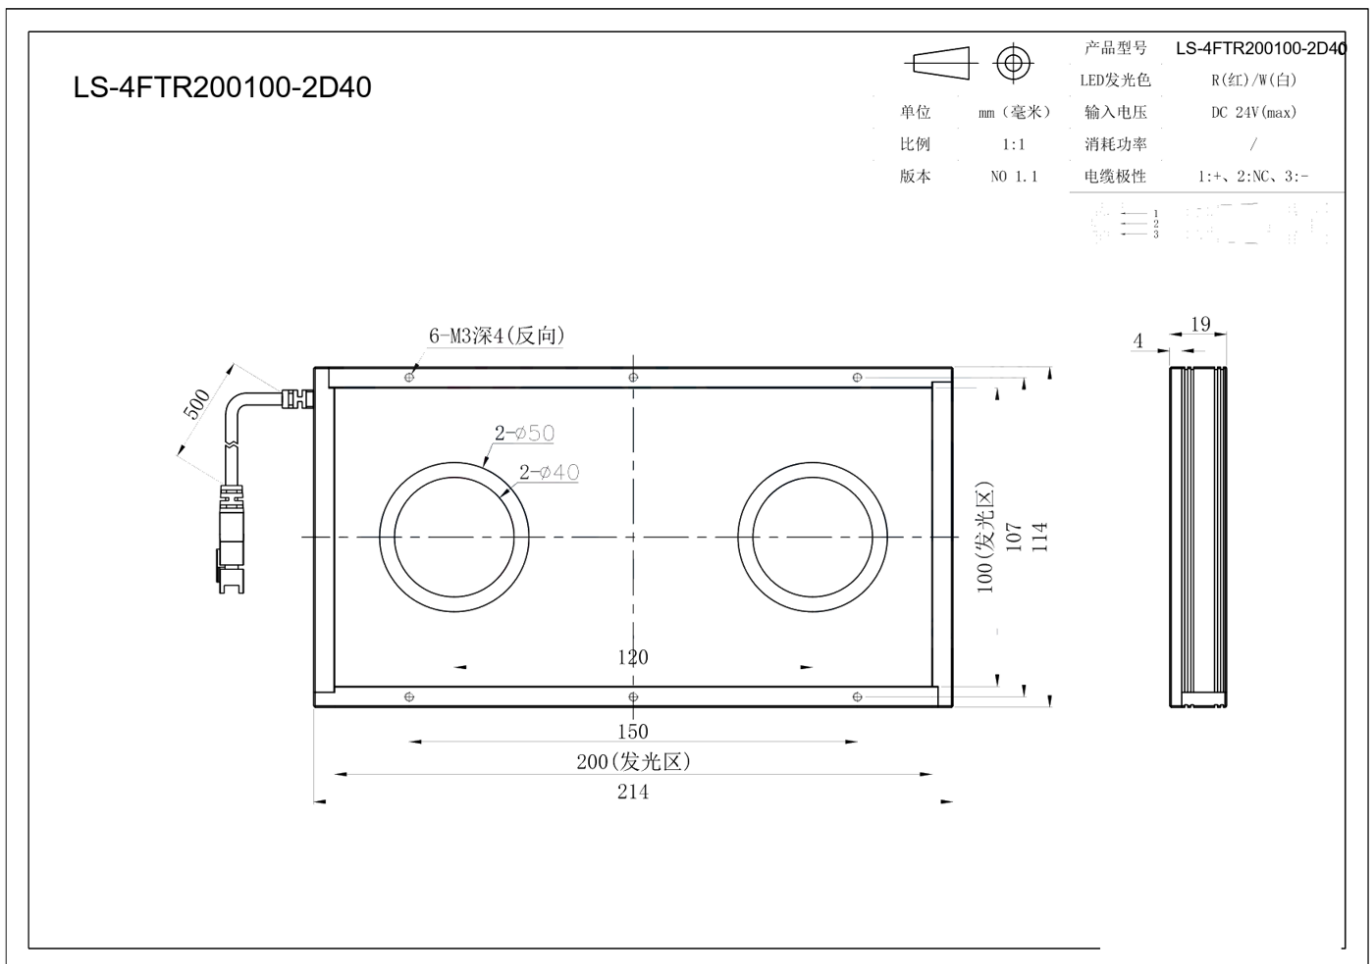


LS-4FTR200100-2D40



单位 mm (毫米)
比例 1:1
版本 NO 1.1

产品型号 **LS-4FTR200100-2D40**
LED发光色 R(红)/W(白)
输入电压 DC 24V(max)
消耗功率 /
电缆极性 1:+、2:NC、3:-


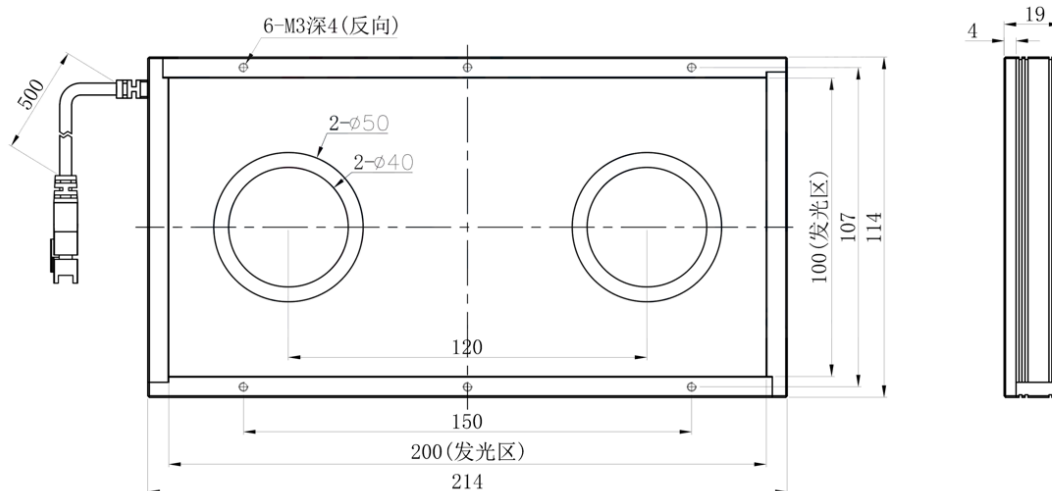


LS-4FTR120120-D30




单位 mm (毫米)
比例 1:1
版本 NO 1.0

产品型号 **LS-4FTR120120-D30**
LED发光色 R(红)/W(白)
输入电压 DC 24V(max)
消耗功率 /
电缆极性 1:+, 2:NC, 3:-

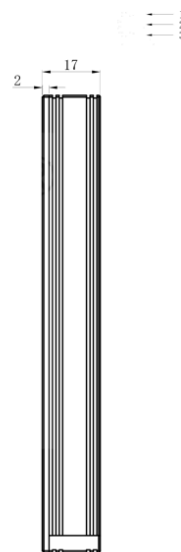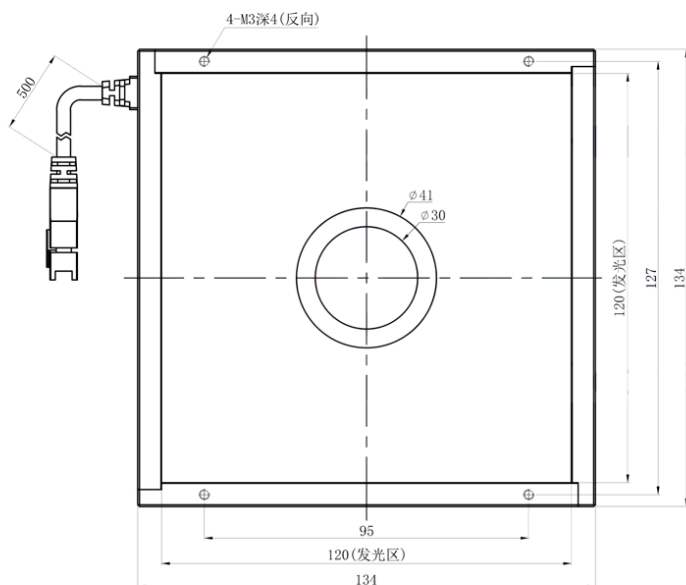

LS-4FTR141141-D35



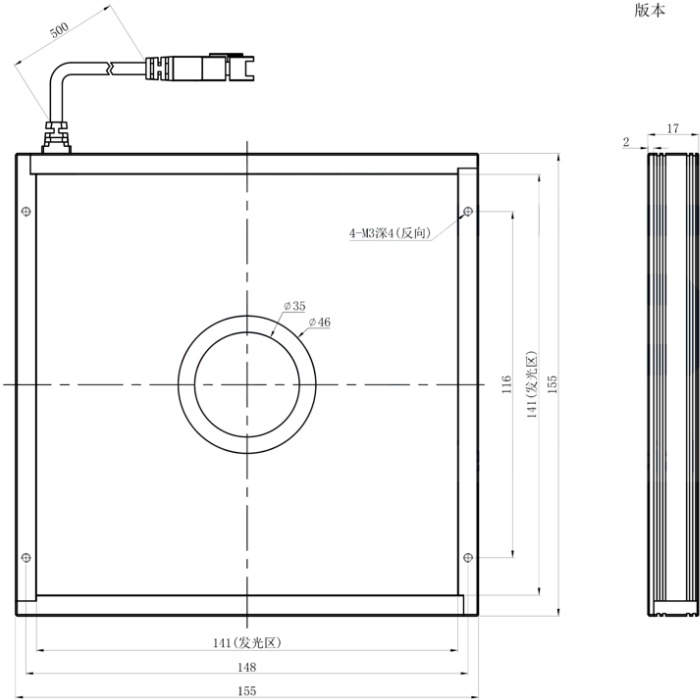


单位 mm (毫米)
比例 1:1
版本 NO 1.0

产品型号	LS-4FTR141141-D35
LED发光色	R(红)/W(白)
输入电压	DC 24V(max)
消耗功率	/
电缆极性	1:+、2:NC、3:-



Performance



*Above diagram only for reference