

Compact line scan light (4LINL)

LS-4LINL series · Line scan lights · 10 models

High-brightness and uniform, with excellent parallelism. Compact in size, with a width of only 30mm and a height of 60mm. The dust removal detection effect is relatively good, natural cooling.



Features

- High-brightness and uniform, with excellent parallelism
- Compact in size, with a width of only 30mm and a height of 60mm
- The dust removal detection effect is relatively good, natural cooling
- High cost performance and can be customized to different lengths
- Suitable for use in narrow Spaces

Applications

- Fabric pattern lines inspection
- Dust inspection on the surface of glass panels
- Contour edge inspection
- Dust-free environment inspection

Common specifications

Cooling	Natural cooling
Note	UV & IR light can be customized as required.

Voltage	24V
---------	-----

Models

Model	Model as printed	Dimension	Power
LS-4LINL100 colours: R, B, G, W	LS-4LINL100-R/BGW	L140xW30xH60(mm)	10.8W
LS-4LINL200 colours: R, B, G, W	LS-4LINL200-R/BGW	L240xW30xH60(mm)	21.6W
LS-4LINL300 colours: R, B, G, W	LS-4LINL300-R/BGW	L340xW30xH60(mm)	32.4W
LS-4LINL400 colours: R, B, G, W	LS-4LINL400-R/BGW	L440xW30xH60(mm)	43.2W
LS-4LINL500 colours: R, B, G, W	LS-4LINL500-R/BGW	L540xW30xH60(mm)	54.0W
LS-4LINL600 colours: R, B, G, W	LS-4LINL600-R/BGW	L640xW30xH60(mm)	64.8W
LS-4LINL700 colours: R, B, G, W	LS-4LINL700-R/BGW	L740xW30xH60(mm)	75.6W
LS-4LINL800 colours: R, B, G, W	LS-4LINL800-R/BGW	L840xW30xH60(mm)	86.4W
LS-4LINL900 colours: R, B, G, W	LS-4LINL900-R/BGW	L940xW30xH60(mm)	97.2W
LS-4LINL1000 colours: R, B, G, W	LS-4LINL1000-R/BGW	L1040xW30xH60(mm)	108W

Dimensions

LS-4LINL600




产品型号 **LS-4LINL600**

LED发光色 R(红)/W(白)

单位 mm(毫米) 输入电压 DC 24V(max)

比例 1:1 消耗功率 /

版本 NO 1.0

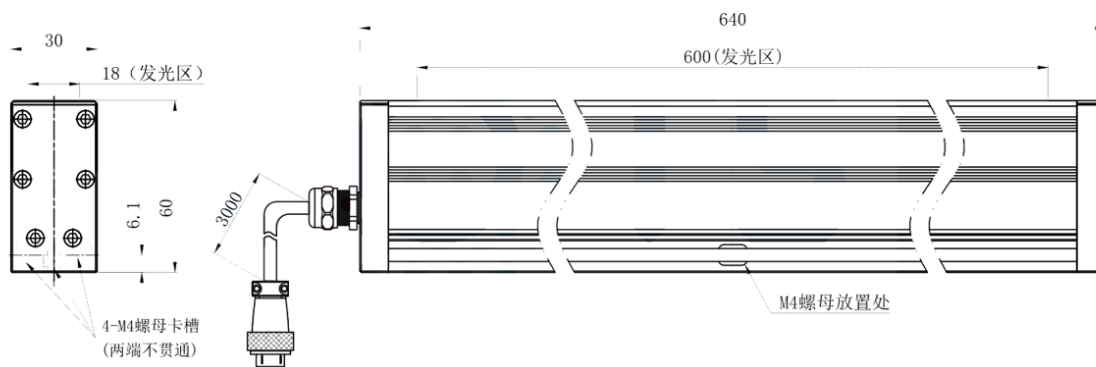

注:四周有M4的螺母卡槽用于安装。

LS-4LINL600




产品型号 **LS-4LINL600**

LED发光色 R(红)/W(白)

单位 mm(毫米) 输入电压 DC 24V(max)

比例 1:1 消耗功率 /

版本 NO 1.0

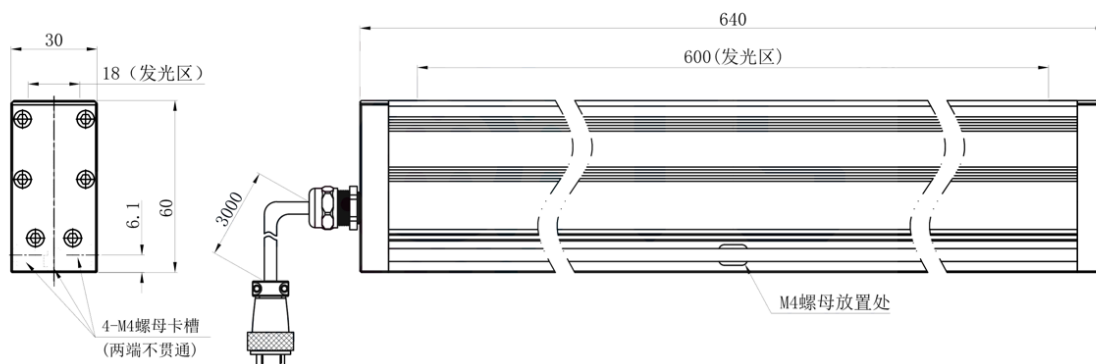


注:四周有M4的螺母卡槽用于安装。

LS-4LINL100



单位 mm (毫米)
比例 1:1
版本 NO 1.0

产品型号 **LS-4LINL100**
LED发光色 R(红)/W(白)
输入电压 DC 24V(max)
消耗功率 /

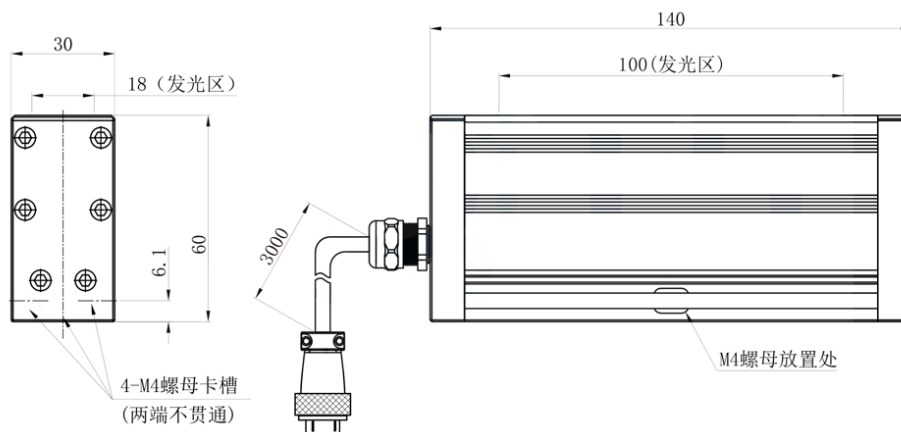


注:四周有M4的螺母卡槽用于安装。

LS-4LINL500



单位 mm (毫米)
比例 1:1
版本 NO 1.0

产品型号 **LS-4LINL500**
LED发光色 R(红)/W(白)
输入电压 DC 24V(max)
消耗功率 /

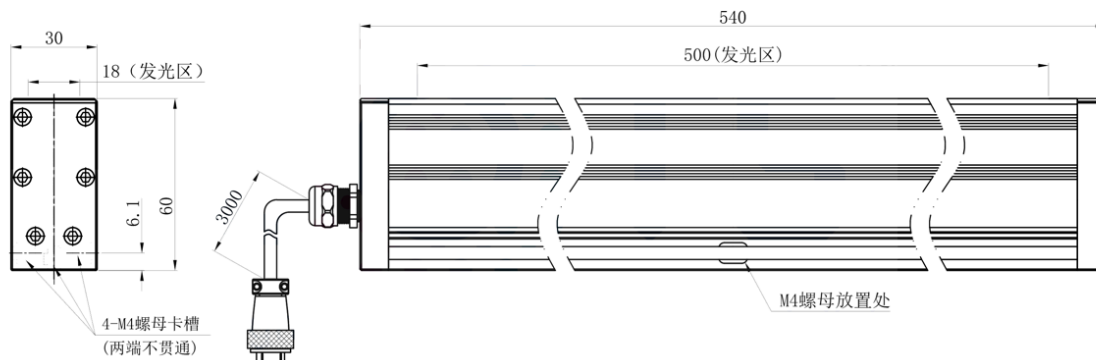

注：四周有M4的螺母卡槽用于安装。

Performance

