

Oblique line scan light (4LIT)

LS-4LIT series · Line scan lights · 10 models

Oblique optical design, the light is emitted at a 20° angle. The oblique line scan light is suitable for line scan system to detect wrinkles and scratches.



Features

- oblique optical design, the light is emitted at a 20° angle. The oblique line scan light is suitable for line scan system to detect wrinkles and scratches

Applications

- Textile fabric inspection for wrinkles
- Carton inspection for loose threads
- Film inspection for vertical wrinkles

Common specifications


Cooling	Natural cooling
Note	UV & IR light can be customized as required.
Voltage	24V

Models

Model	Model as printed	Dimension	Power
LS-4LIT100 colours: R, B, G, W	LS-4LIT100-R/BGW	L140xW48xH75(mm)	20W
LS-4LIT200 colours: R, B, G, W	LS-4LIT200-R/BGW	L240xW48xH75(mm)	34W
LS-4LIT300 colours: R, B, G, W	LS-4LIT300-R/BGW	L340xW48xH75(mm)	53W
LS-4LIT400 colours: R, B, G, W	LS-4LIT400-R/BGW	L440xW48xH75(mm)	68W

LS-4LIT500 colours: R, B, G, W	LS-4LIT500-R/BGW	L540xW48xH75(mm)	87W
LS-4LIT600 colours: R, B, G, W	LS-4LIT600-R/BGW	L640xW48xH75(mm)	101W
LS-4LIT700 colours: R, B, G, W	LS-4LIT700-R/BGW	L740xW48xH75(mm)	116W
LS-4LIT800 colours: R, B, G, W	LS-4LIT800-R/BGW	L840xW48xH75(mm)	135W
LS-4LIT900 colours: R, B, G, W	LS-4LIT900-R/BGW	L940xW48xH75(mm)	154W
LS-4LIT1000 colours: R, B, G, W	LS-4LIT1000-R/BGW	L1040xW48xH75(mm)	168W

Dimensions

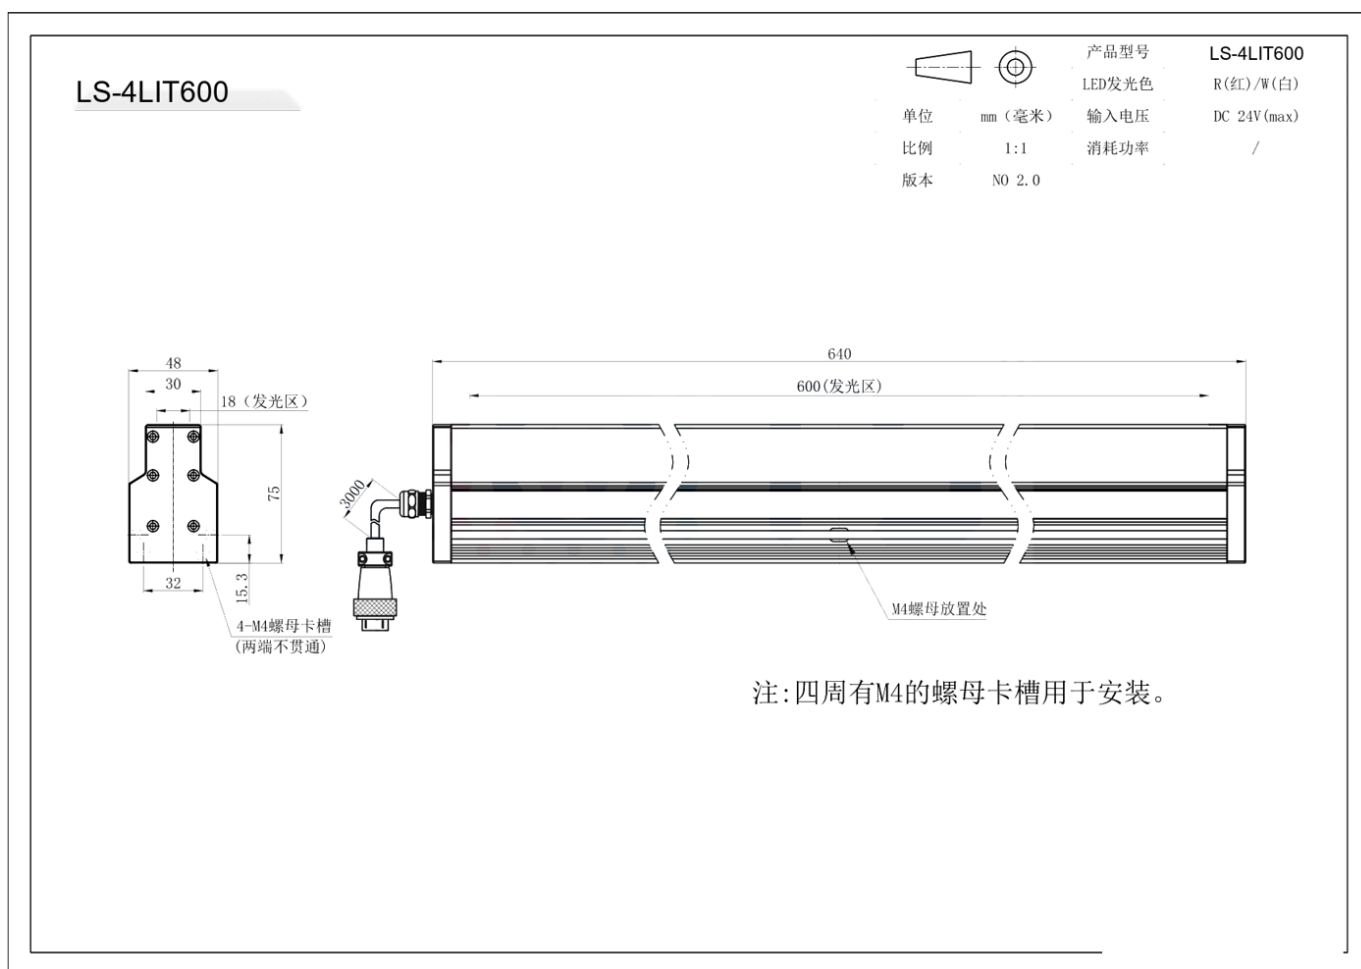


LS-4LIT600



单位 mm (毫米)
比例 1:1
版本 NO 2.0

产品型号 **LS-4LIT600**
LED发光色 R(红)/W(白)
输入电压 DC 24V(max)
消耗功率 /

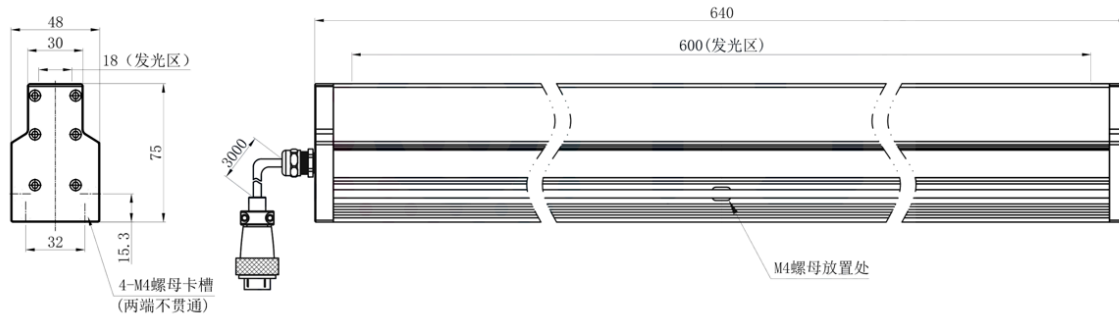



注:四周有M4的螺母卡槽用于安装。

LS-4LIT100



单位 mm (毫米)
比例 1:1
版本 NO 2.0

产品型号 **LS-4LIT100**
LED发光色 R (红)/W (白)
输入电压 DC 24V (max)
消耗功率 /

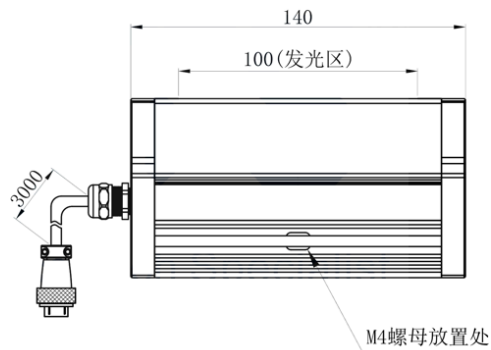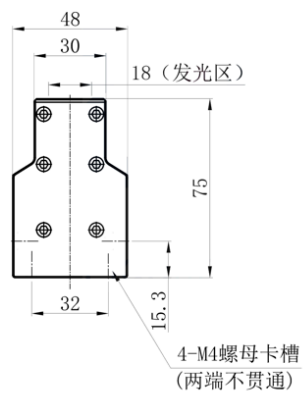



注: 四周有M4的螺母卡槽用于安装。

LS-4LIT500



单位 mm (毫米)
比例 1:1
版本 NO 2.0

产品型号 **LS-4LIT500**
LED发光色 R (红)/W (白)
输入电压 DC 24V (max)
消耗功率 /

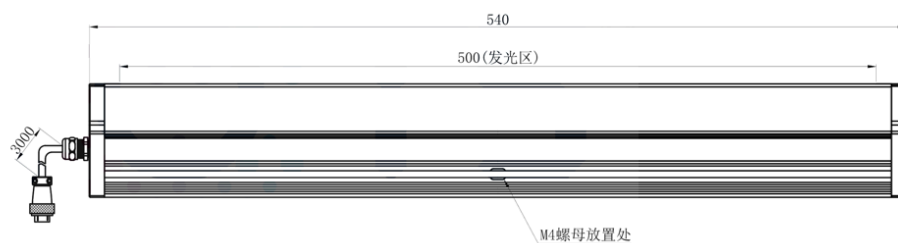

注: 四周有M4的螺母卡槽用于安装。