

Collimated back light (4PFT)

LS-4PFT series · Backlights · 14 models

Special parallel film design, simple structure, high effect. Compact design, high efficiently use the eco-friendly material. Import ultrathin paste LED used, high luminance, high uniformity.

Features

- Special parallel film design, simple structure, high effect
- Compact design, high efficiently use the eco-friendly material
- Import ultrathin paste LED used, high luminance, high uniformity
- Shell processed by high precision mould, shorten the difference between different batch



Applications

- Metal column contour measure
- Glass bottle diameter measure
- Ceramics column diameter measure
- Screw thread contour measure

Common specifications

Note	UV & IR light can be customized as required.
Voltage	24V

Models

Model	Model as printed	Dimension	Power
LS-4PFT3030 colours: R, B, G, W	LS-4PFT3030-R/BGW	L44xW44xH19(mm)	1.1W/1.1W
LS-4PFT5050 colours: R, B, G, W	LS-4PFT5050-R/BGW	L64xW64xH19(mm)	2.2W/3.7W
LS-4PFT6060 colours: R, B, G, W	LS-4PFT6060-R/BGW	L74xW74xH19(mm)	4.8W/4.8W
LS-4PFT7070 colours: R, B, G, W	LS-4PFT7070-R/BGW	L84xW84xH19(mm)	4.8W/5.3W
LS-4PFT8080 colours: R, B, G, W	LS-4PFT8080-R/BGW	L94xW94xH19(mm)	6.4W/8.0W
LS-4PFT9090 colours: R, B, G, W	LS-4PFT9090-R/BGW	L104xW104xH19(mm)	6.4W/8.0W
LS-4PFT100100 colours: R, B, G, W	LS-4PFT100100-R/BGW	L114xW114xH19(mm)	9.6W/11.1W
LS-4PFT120120 colours: R, B, G, W	LS-4PFT120120-R/BGW	L134xW134xH19(mm)	11.1W/14.8W
LS-4PFT130130 colours: R, B, G, W	LS-4PFT130130-R/BGW	L144xW144xH19(mm)	12.7W/15.9W
LS-4PFT140140 colours: R, B, G, W	LS-4PFT140140-R/BGW	L154xW154xH19(mm)	12.7W/16.9W
LS-4PFT150150 colours: R, B, G, W	LS-4PFT150150-R/BGW	L164xW164xH19(mm)	19.0W/23.8W
LS-4PFT160160 colours: R, B, G, W	LS-4PFT160160-R/BGW	L174xW174xH19(mm)	19.0W/23.8W
LS-4PFT180180 colours: R, B, G, W	LS-4PFT180180-R/BGW	L194xW194xH19(mm)	21.2W/26.4W
LS-4PFT200200 colours: R, B, G, W	LS-4PFT200200-R/BGW	L214xW214xH21.5(mm)	25.4W/34.9W


Dimensions

LS-4PFT120120



单位	mm (毫米)
比例	1:1
版本	NO 1.0

产品型号	LS-4PFT120120
LED发光色	R(红)/W(白)
输入电压	DC 24V (max)
消耗功率	/
电缆极性	1:+, 2:NC, 3:-

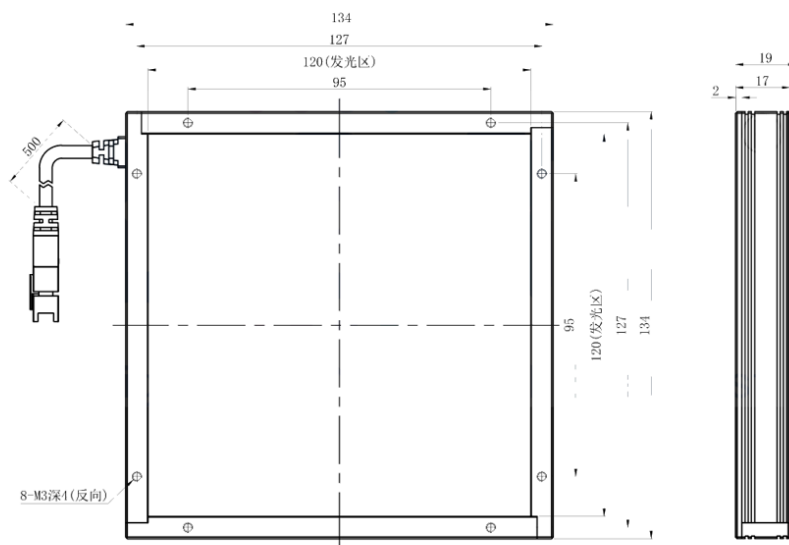


LS-4PFT120120



单位	mm (毫米)
比例	1:1
版本	NO 1.0

产品型号	LS-4PFT120120
LED发光色	R(红)/W(白)
输入电压	DC 24V(max)
消耗功率	/
电缆极性	1:+, 2:NC, 3:-

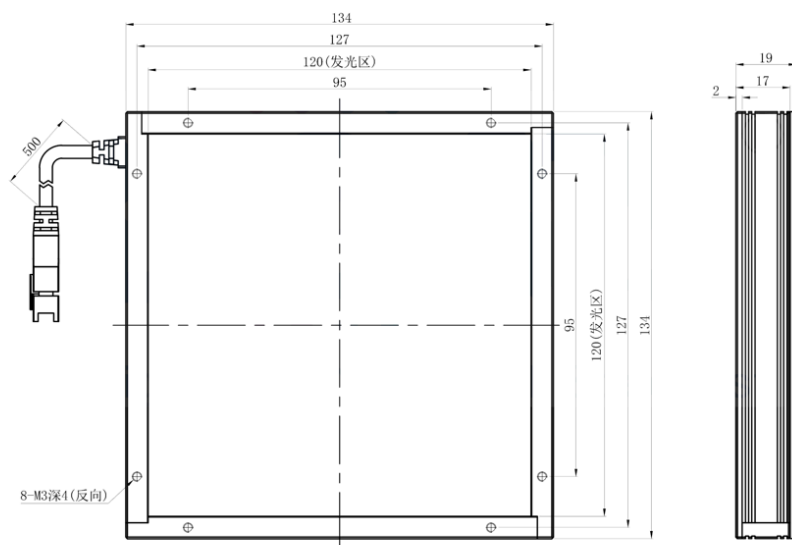



LS-4PFT3030



单位	mm (毫米)
比例	1:1
版本	NO 1.0

产品型号	LS-4PFT3030
LED发光色	R(红)/W(白)
输入电压	DC 24V(max)
消耗功率	/
电缆极性	1:+, 2:NC, 3:-

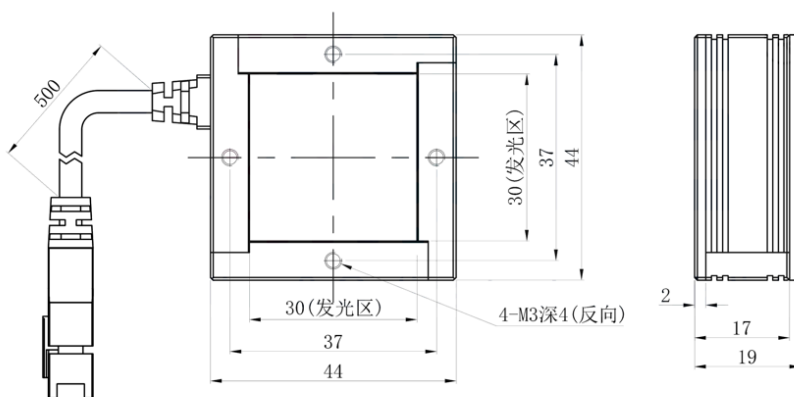

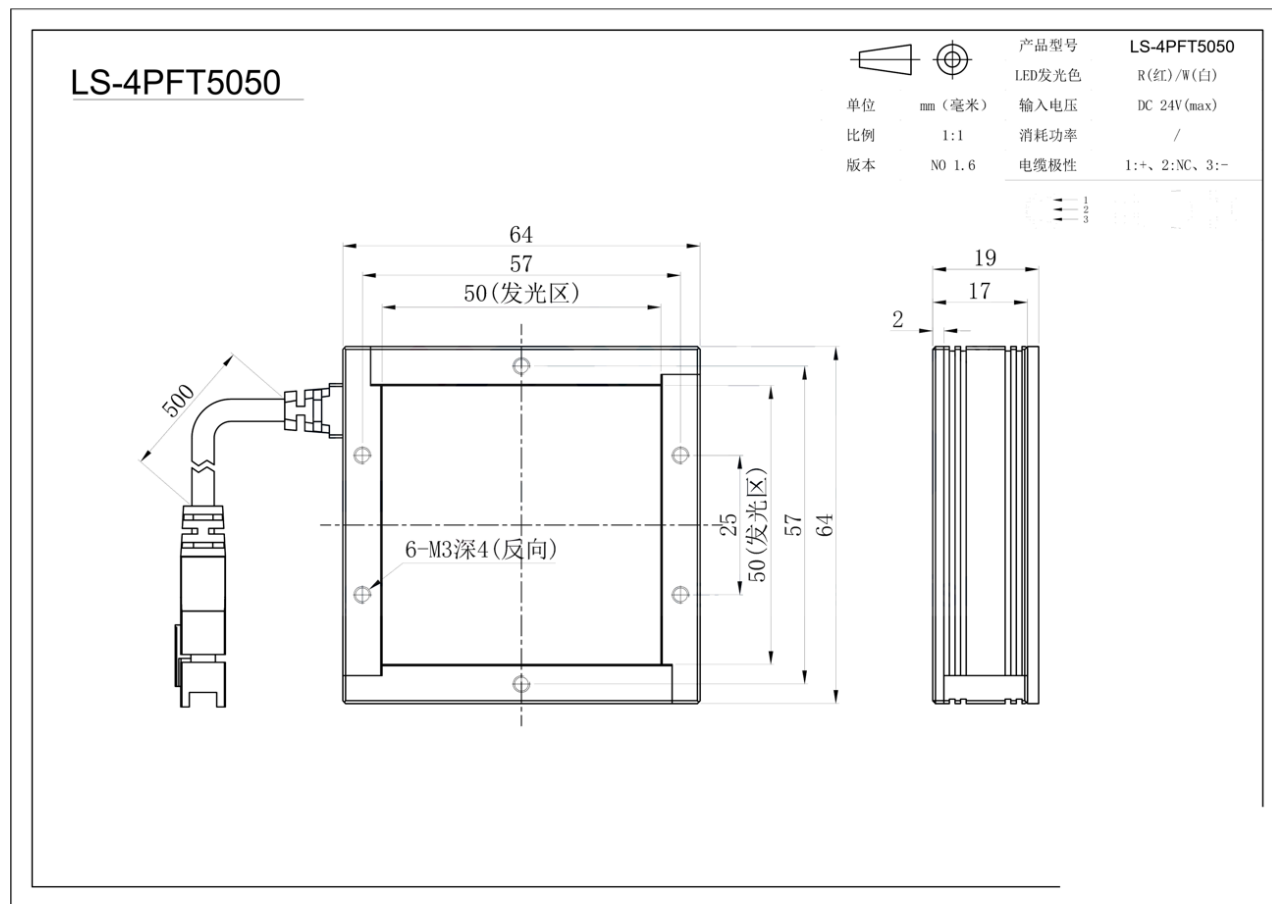

Performance

