

Compact analog point light controller, 2 channels (AC10-A02)

LS-AC-A02 series · Light controllers · 1 model



Analog constant current control. Support external trigger mode. Low trigger response time.

Features

- Analog constant current control
- Support external trigger mode
- Low trigger response time
- Knob stepless linear adjustment of brightness
- Normally bright and normally off mode can be switched
- 5-24V trigger, adaptable to high and low level trigger modes

Common specifications

Maximum output current of single channel	0.75A
Maximum input voltage	220VAC
Maximum output voltage	5V
Overheat protection	NO
Working mode	Constant on mode, constant off mode
Short circuit protection	NO
Brightness level	Knob stepless linear adjustment
Trigger mode	Level Trigger
Operating temperature	5~50°C
Driving mode	Constant Current
Luminous mode	Constant Brightness
Dimension	129x148x44mm


Ordering code: LS-AC<built-in power supply W>-A02-<max output voltage><max output current of single channel>-<number of channels> (AC = analog constant current type, A02 = A02 series), e.g. LS-AC10-A02-050075-2

Models

Model	Built-in power supply power	Number of channels	Connected light source type	Catalog page	Total output (W)	Control
-------	-----------------------------	--------------------	-----------------------------	--------------	------------------	---------

LS-AC10-A02-050075-2	10W	2	5V point light source	P53	10	analog knob
----------------------	-----	---	-----------------------	-----	----	-------------

Dimensions

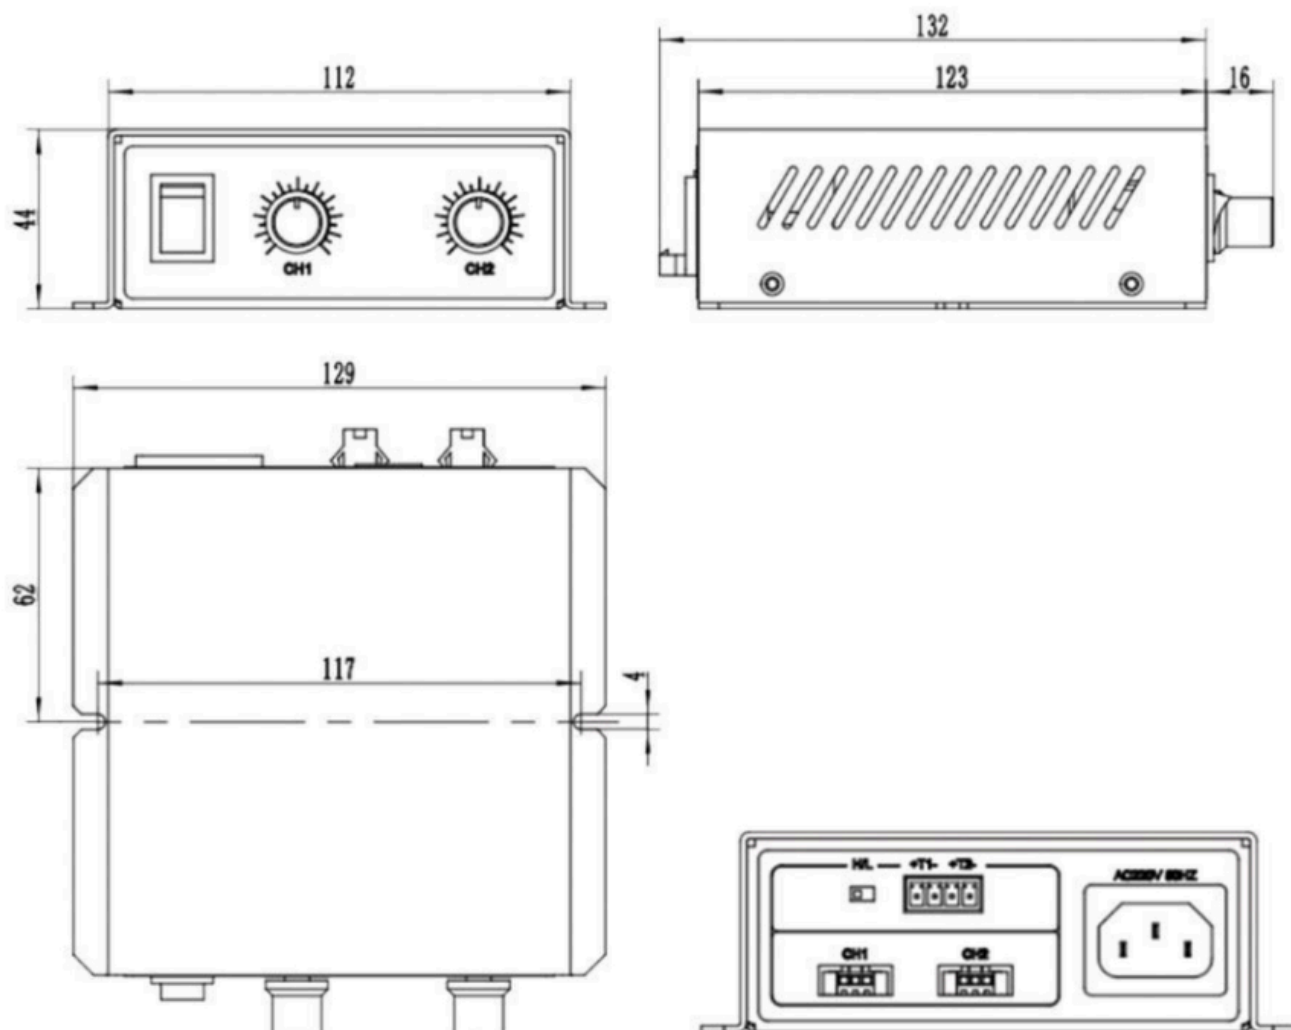

Product views

