

Analog controller

LS-AV-K series · Light controllers · 4 models



Controller section 'Analog controller' of the light controller selection manual (cards P55-P59).

Features

- Analog constant voltage control
- Support external trigger mode
- Low trigger response time
- Knob stepless linear adjustment of brightness
- Normally bright and normally off mode can be switched
- 5-24V trigger, adaptable to high and low level trigger modes
- Convenient installation, screw mounting or C45 rail mounting

Common specifications


Maximum output current of single channel	1A
Maximum input voltage	220VAC
Maximum output voltage	24V
Overheat protection	NO
Working mode	Constant on mode, constant off mode
Short circuit protection	NO
Brightness level	Knob stepless linear adjustment
Trigger mode	Level Trigger
Operating temperature	5~50°C
Connection light source type	24V light source
Luminous mode	Constant Brightness
Driving mode	Constant Voltage




Models

Model	Built-in power supply power	Number of channels	Connected light source type	Number of channels (parameter table)	Built-in power supply	Total output (W)	Control
LS-AV65-24010-2	65W	2	10mA~1A 24V power supply	Two channels	65W	65	analog knob
LS-AV40-A02-24010-2	-	2	-	-	40W	40	Analog knob (stepless)
LS-AV65-24010-4	65W	4	10mA~1A 24V power supply	Two channels (as printed; the model table gives 4)	65W/120W	65	analog knob
LS-AV120-24010-4	120W	4	10mA~1A 24V power supply	Two channels (as printed; the model table gives 4)	65W/120W	120	analog knob

More values per model (Dimension, Catalog page, Output voltage, Max current per channel, Trigger, Feature 1, Feature 2, Manual page code) are on each product page.

Dimensions

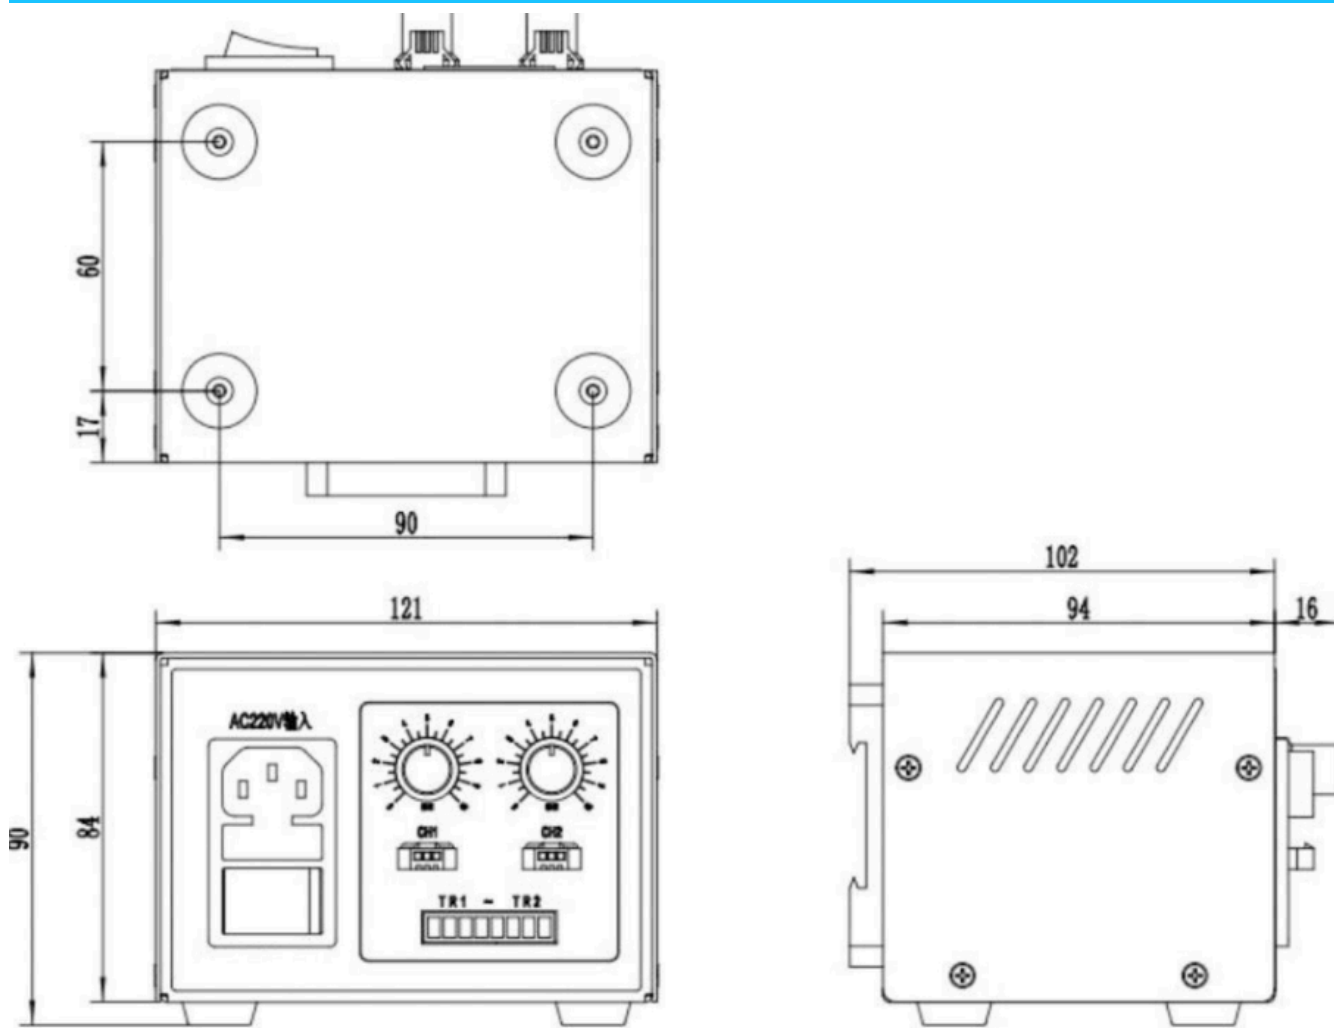

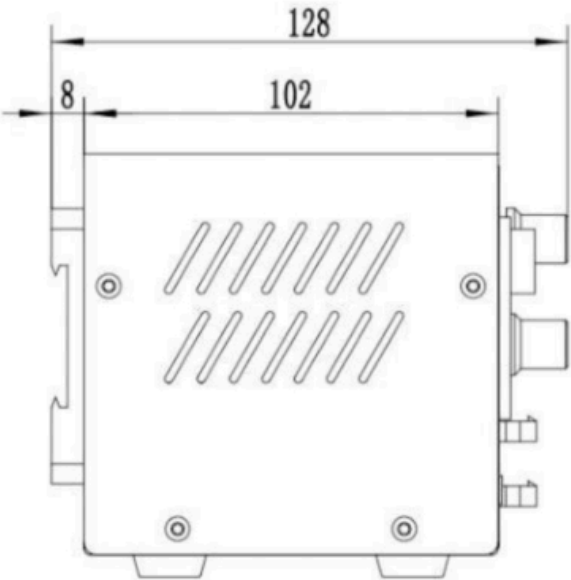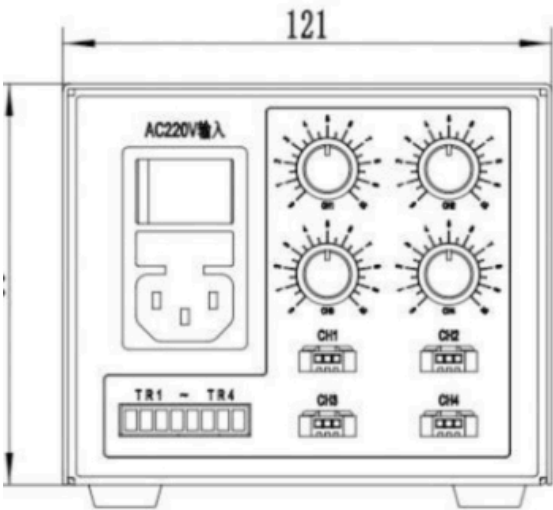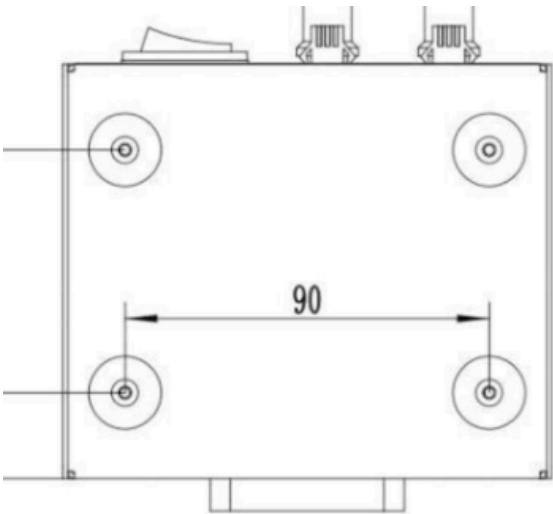

Product views

