

Pin inspection light (BRV)

LS-BRV series · Bar lights · 5 models

Pin inspection light use surface-mount LED, the light ray is thin, similar as laser light. Compact volumn, easy to install. Applicate in slender object inspection, such as Pin inspection.



Features

- Strong directivity, highlight the pin to have clearer contrast to background
- Matched with brighten Strobe Controller, used in high speed application
- Used in the small items, such as pin inspection

Applications

- Pin location or measure

Common specifications

Note	UV & IR light can be customized as required.
Voltage	24V

Models

Model	Dimension	Power
LS-BRV12075-W2	L120xW75xH13.5(mm)	2.9W/5.8W
LS-BRV120110-W4	L120xW110xH16(mm)	11.6W/11.6
LS-BRV150120-W2	L150xW120xH26(mm)	8.7W/11.6W
LS-BRV170120-W2	L170xW120xH13.5(mm)	8.7W/11.6W
LS-BRV190110-W4	L190xW110xH16(mm)	14.4W/17.3W


Dimensions

LS-BRV150120-W2



单位 mm (毫米)
比例 1:1
版本 NO 1.0

产品型号	LS-BRV150120-W2
LED发光色	R(红)/W(白)
输入电压	DC 24V(max)
消耗功率	/
电缆极性	1:+、2:NC、3:-

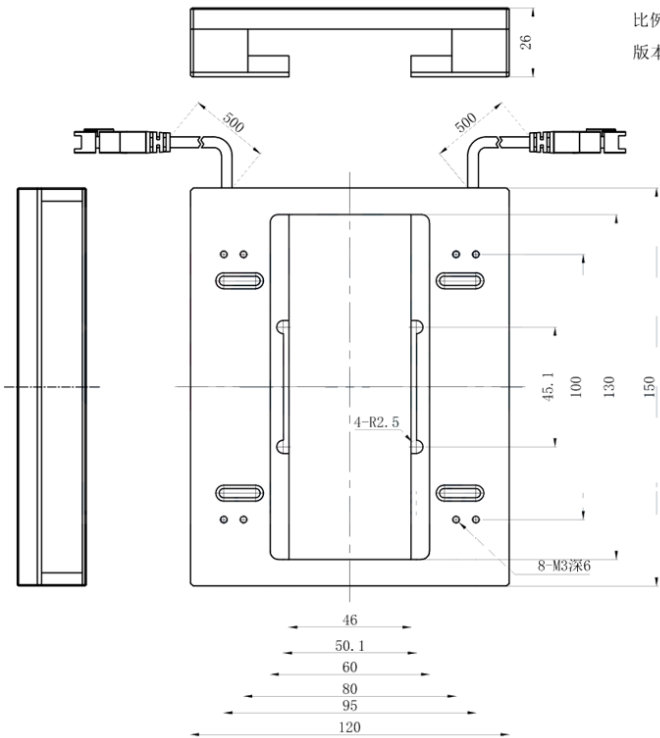


注：间距可调范围46~22

LS-BRV150120-W2



单位 mm (毫米)
比例 1:1
版本 NO 1.0

产品型号	LS-BRV150120-W2
LED发光色	R(红)/W(白)
输入电压	DC 24V(max)
消耗功率	/
电缆极性	1:+、2:NC、3:-

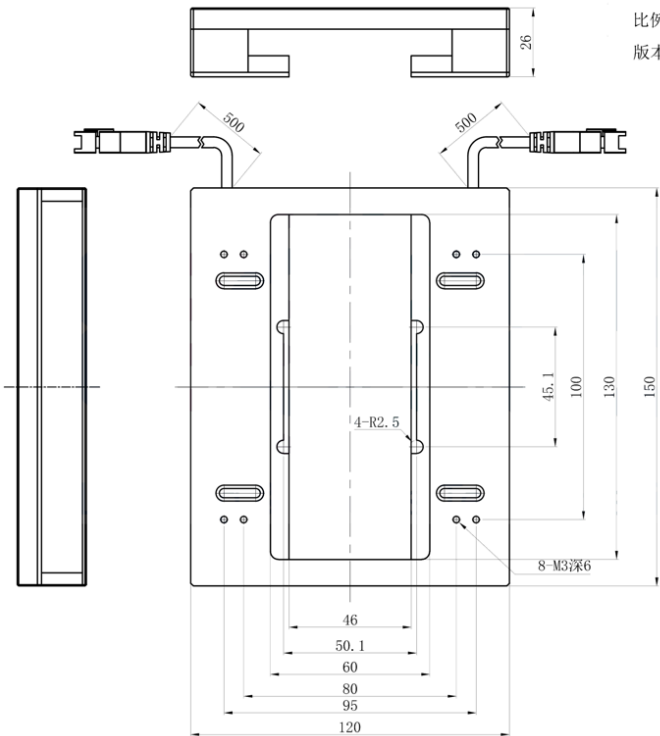


注：间距可调范围46~22

LS-BRV12075-W2



单位 mm (毫米)
比例 1:1
版本 NO 1.0

产品型号	LS-BRV12075-W2
LED发光色	R(红)/W(白)
输入电压	DC 24V(max)
消耗功率	/
电缆极性	1:+, 2:NC, 3:-

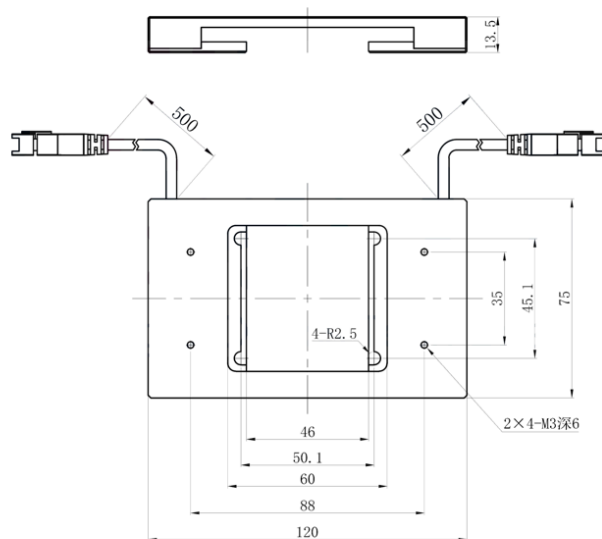

LS-BRV120110-W4



单位 mm (毫米)
比例 1:1
版本 NO 1.0

产品型号	LS-BRV120110-W4
LED发光色	R(红)/W(白)
输入电压	DC 24V(max)
消耗功率	/
电缆极性	1:+、2:NC、3:-

