

Industrial lens, 1" 5MP FA lens

LS-C-5M series · Lenses · 6 models



Common specifications

Mount	C Mount
Max image surface size	1"


Models

Model	Focal length (mm)	Aperture	FOV @ WD 200 (H x V), 1" sensor	FOV @ WD 200 (H x V), 2/3" sensor	FOV @ WD 200 (H x V), 1/2" sensor	TV distortion	Min distance
LS-C1214-5M	12.5	1.4	221.25 x 165.85	146.34 x 123.69	111.50 x 83.62	<1.8%	0.1M
LS-C1614-5M	16	1.4	167.11 x 125.26	110.53 x 93.42	84.21 x 63.16	<0.2%	0.1M
LS-C2514-5M	25	1.4	97.69 x 73.23	64.62 x 54.62	49.23 x 36.92	<0.1%	0.1M
LS-C3514-5M	35	1.4	69.90 x 52.39	46.23 x 39.08	35.22 x 26.42	<0.1%	0.15M
LS-C5014-5M	50	1.4	77.91 x 58.40*	51.53 x 43.56*	39.26 x 29.45*	<0.1%	0.3M
LS-C7518-5M	75	1.8	110.43 x 82.78*	73.04 x 61.74*	55.65 x 41.74*	<0.1%	0.8M

More values per model (Filter thread, Interface, Sensor format, Resolution (MP), Field of view) are on each product page.

Dimensions

LS-C2514-5M

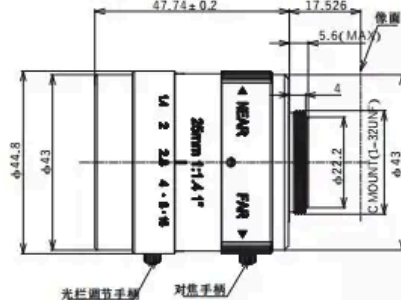

LS-C7518-5M

