

Halogen lamp line scan light (LIN)

LS-LIN series · Line scan lights · 5 models

Halogen lamp, easy to adjust and control brightness, good color rendering, long service life, the light is used for places requiring concentrated irradiation, high brightness but large heat, need a good heat dissipation environment. Ancient calligraphy and painting inspection, graphite sample defect inspection, antique ceramic pattern inspection.



Common specifications

Note UV & IR light can be customized as required.

Models

Model	Dimension	Voltage	Power
LS-LIN35052-HLG	L362xW60xH135.5(mm)	24V	300W
LS-LIN43052-HLG	L442xW60xH135.5(mm)	48V	400W
LS-LIN62052-HLG	L632xW60xH135.5(mm)	48V	600W
LS-LIN82052-HLG	L832xW60xH135.5(mm)	48V	800W
LS-LIN102052-HLG	L1032xW60xH135.5(mm)	48V	1000W

Dimensions

LS-LIN62052


		产品型号	LS-LIN62052
单位	mm (毫米)	发光色	W (白)
比例	1:1	输入电压	DC 48V (max)
版本	NO 1.0	消耗功率	600W
		电缆极性	1:+、2:-、3:FAN+、4:FAN-



注:四周有M4螺母卡槽用于安装。

LS-LIN62052

		产品型号	LS-LIN62052
		发光色	W (白)
单位	mm (毫米)	输入电压	DC 48V (max)
比例	1:1	消耗功率	600W
版本	NO 1.0	电缆极性	1:+、2:-、3:FAN+、4:FAN-

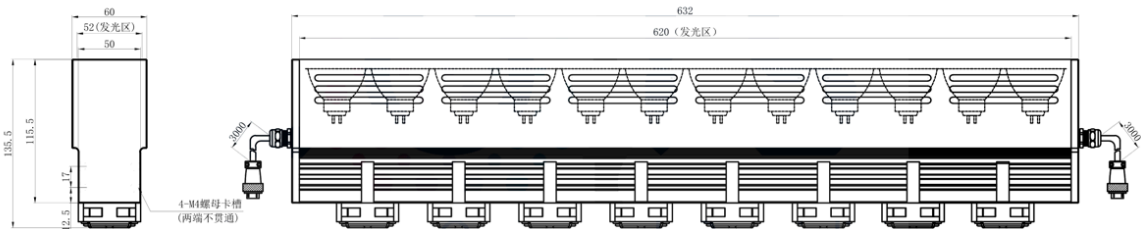

注:四周有M4螺母卡槽用于安装。



LS-LIN35052



单位 mm (毫米)
比例 1:1
版本 NO 1.0





产品型号	LS-LIN35052
发光色	W (白)
输入电压	DC 24V (max)
消耗功率	/
电缆极性	1:+, 2:-, 3:FAN+, 4:FAN-

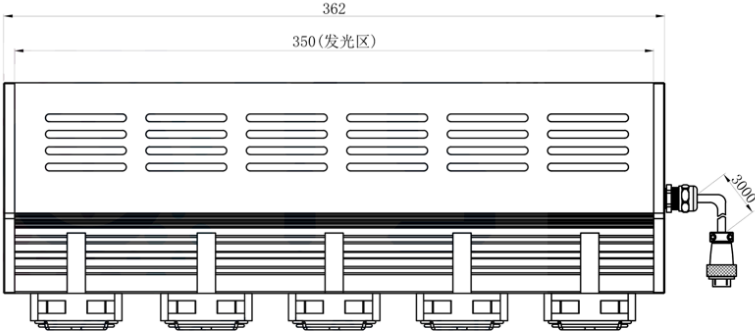

注:四周有M4螺母卡槽用于安装。

LS-LIN43052

		产品型号	LS-LIN43052
		发光色	W (白)
单位	mm (毫米)	输入电压	DC 24V (max)
比例	1:1	消耗功率	400W
版本	NO 1.0	电缆极性	1:+、2:-、3:FAN+、4:FAN-
			

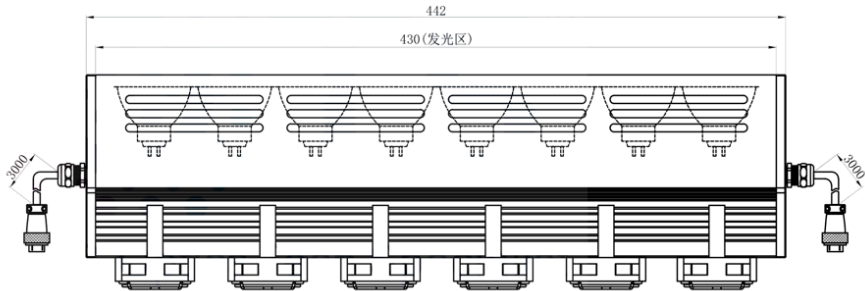

注: 四周有M4螺母卡槽用于安装。